

PROPOSED STABLES & TACK ROOM AT SILVER DALE, FIRST DROVE, GOSBERTON CLOUGH, SPALDING, LINCS. FOR MR. P. MILLS

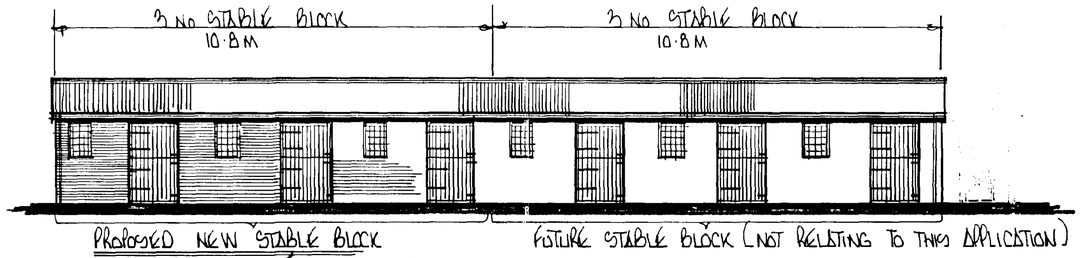


FRONT ELEVATION


SCALE 1/75.



END ELEVATIONS

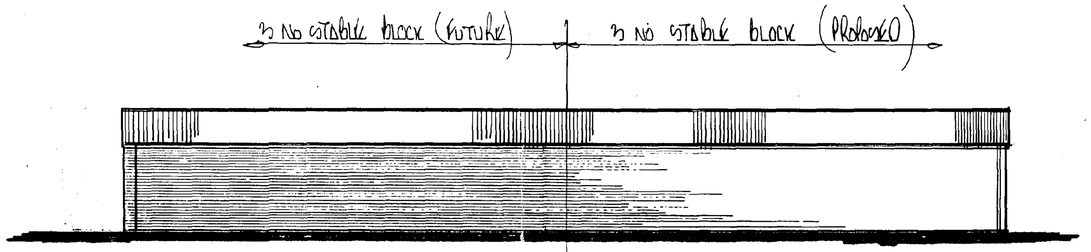


REAR ELEVATION (FACING ROAD)

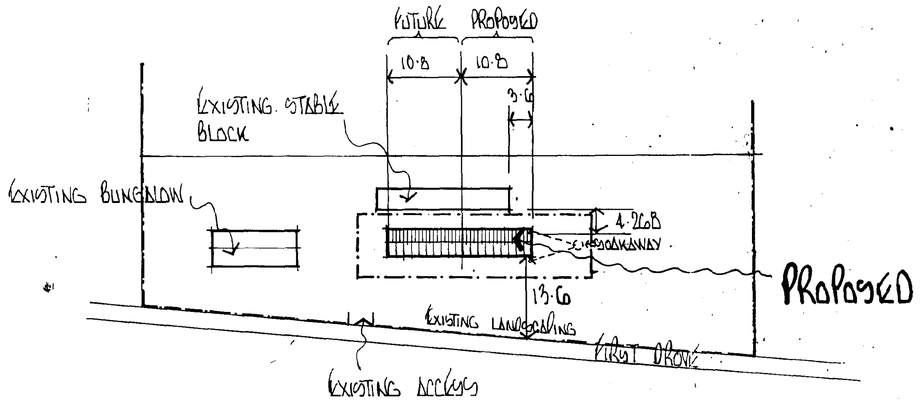

BLOCK PLAN

SCALE 1/500

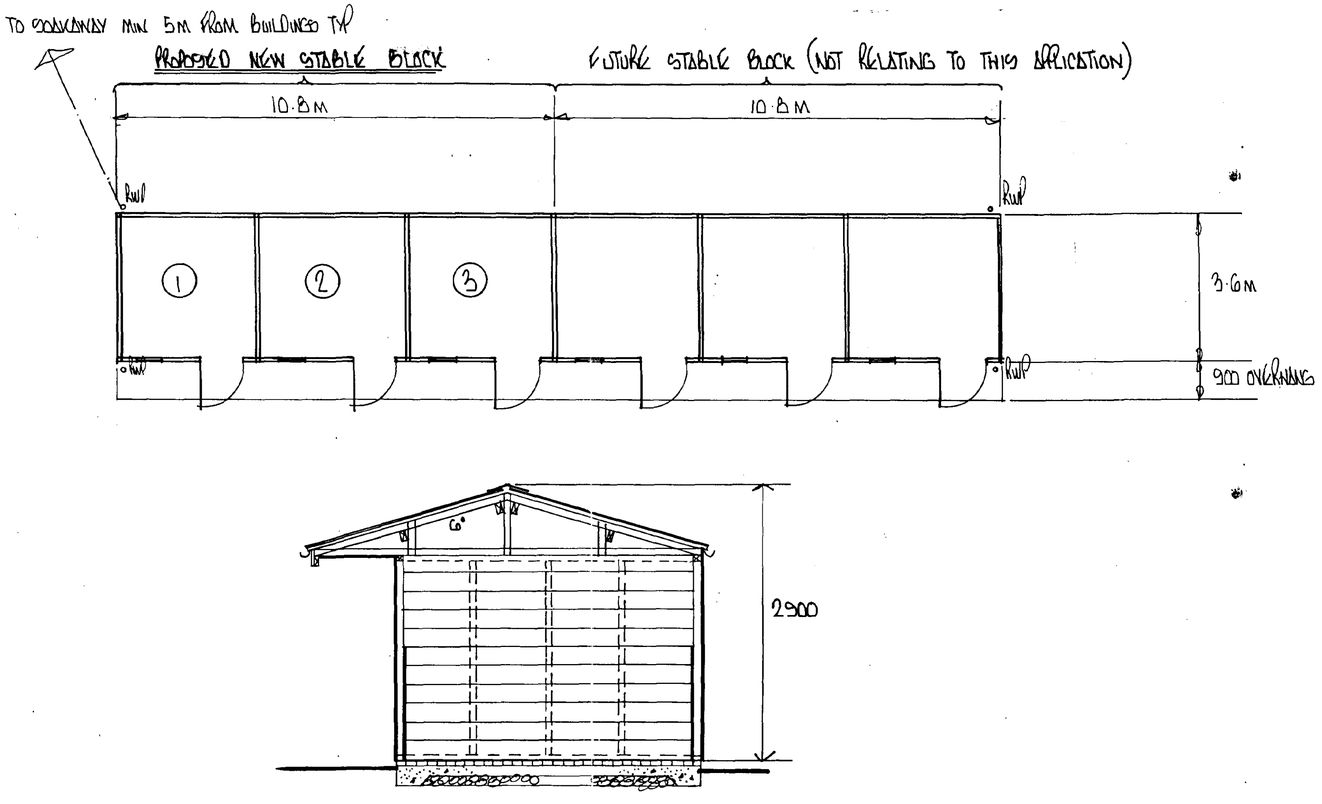

TYPICAL SECTION THRO

ROOF CLADDING (NAT^L COLOUR)
CORRUGATED CEMENT FIBRE SHEETING WITH GALVANISED METAL RIDGE CAP

VERTICAL CLADDING
TREATED SHIPLAP TO ALL ELEVATIONS LEAVING OUT FOR WINDOWS & DOORS.

WINDOWS
SOFTWOOD FRAMING

STABLE DOORS
TWO LEAF LEDGED & BRACED EXCEPT TACK ROOM. COMPLETE WITH ALL T. HINGES BOLTS & HASPS ETC.

RAINWATER GOODS
100 H.R. P.V.C GUTTERS, 63Ø P.V.C. RWPS TO SOAKAWAYS MIN. 5M. FROM BUILDINGS

Ref: 02358/98

DETERMINED PLAN

DRWG 1 OF 1