

PROPOSED RESIDENTIAL DEVELOPMENT, SPALDING ROAD,
GOSBERTON, SPALDING, PE11 4NP
FLOOD RISK ASSESSMENT



View of site looking north

S M Hemmings B Sc C Eng MICE MIWEM,
13 Lea Gardens
Peterborough
PE3 6BY
stuart.hemmings@btinternet.com

This flood risk assessment has been prepared solely to support the planning application for a residential development at Spalding Road, Gosberton. The author has made every effort to provide an accurate assessment of the flood risk but accepts no liability should the information be found to be incorrect or incomplete, or if it is used for any purposes other than for which it was originally commissioned.

Introduction


A planning application is due to be submitted to South Holland District Council for outline permission to construct a residential development of four dwellings west of Spalding Road, Gosberton, Spalding, PE11 4HL. The site is located on the southern side of Gosberton.

The site is within flood zones 1, 2 and 3 as shown on the Environment Agency's Flood Zone map. The flood zone maps do not take into account existing flood defences.

The Planning Application requires a flood risk assessment to be carried out as specified in the Practice Guidance to the National Planning Policy Framework Development and Flood Risk. The site is within a defended area as specified on the South Holland District Council's Strategic Flood Risk Assessment (SHDC SFRA) map and is located in the Welland and Deepings Internal Drainage Board District.

Environment Agency (EA) Flood Zones

The map below is taken from the Environment Agency website and shows the flood zones in this area.

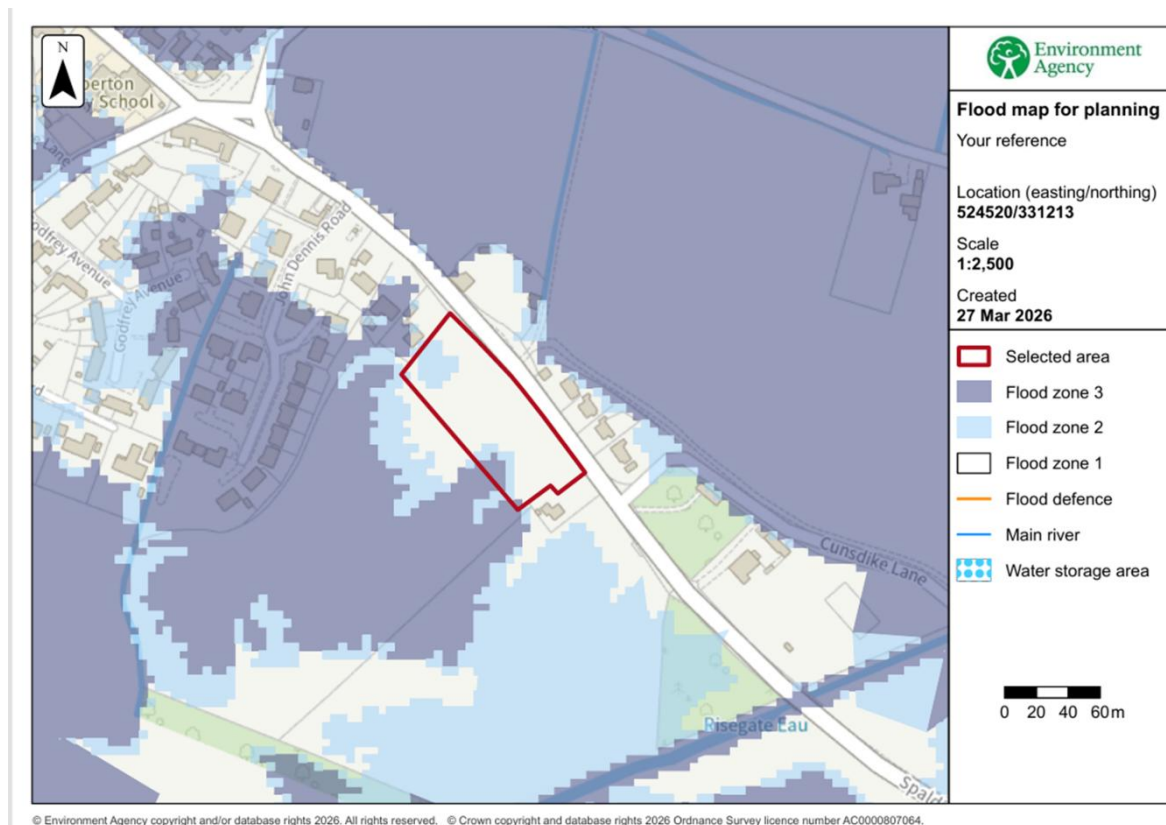

It can be seen that most of the site is within flood zone 1, with a small part (less than 10%) within flood zone 2, and a very small area within flood zone 3.

Application Site

The site is located 4.2 km from the tidal section of the River Welland. The National Grid Reference of the site is 524520 331215.

The position and extent of the site is shown on the plan at the end of this document.

As the site is within a defended area the proposed part of the development within flood zone 3 can be considered to be within Flood Zone 3(a) as detailed on the Environment Agency's flood zone maps without defences, as defined in Table 1 of the Technical Guidance.

Applying the flood risk vulnerability classification in Table 2 of the Guidance, a residential development is classified as "more vulnerable".

Table 3 of the Guidance is shown below:

Flood Zones	Flood Risk Vulnerability Classification				
	Essential infrastructure	Highly vulnerable	More vulnerable	Less vulnerable	Water compatible
Zone 1	✓	✓	✓	✓	✓
Zone 2	✓	Exception Test required	✓	✓	✓
Zone 3a †	Exception Test required †	X	Exception Test required	✓	✓
Zone 3b *	Exception Test required *	X	X	X	✓*

From the table above it can be seen that "More Vulnerable" development is considered satisfactory within flood zones 1 and 2. In flood zone 3(a) the sequential and exception test need to be applied.

Sequential Test

The aim of the Sequential Test, as set out in the Planning Practice Guidance, is to ensure that a sequential approach is followed to steer new development to areas with the lowest probability of flooding. The flood zones as defined in the Strategic Flood Risk Assessment for the area provide the basis for applying the Test. The aim is to steer new development to Flood Zone 1 (areas with a low probability of river or sea flooding). Where there are no reasonably available sites in Flood Zone 1, local planning authorities in their decision making should take into account the flood risk vulnerability of land uses and consider reasonably available sites in Flood Zone 2 (areas with a medium probability of river or sea flooding), applying the Exception Test if required. Only where there are no reasonably available sites in Flood Zones 1 or 2 should the suitability of sites in Flood Zone 3 (areas with a high probability of river or sea flooding) be considered, taking into account the flood risk vulnerability of land uses and applying the Exception Test if required.

Applying the sequential approach for this site it can be seen that all of the proposed dwellings are located in flood zone 1. All of the land in flood zones 2 and 3 is located in the rear gardens of the proposed properties.

The flood hazard map for the 1 in 200 year event in 2115 shown on the South East Lincolnshire Planning website indicates that there is no predicted hazard on any part of this site.

This report will demonstrate that flooding is not predicted on the site of the proposed building in a 1 in 100 year fluvial or a 1 in 200 year tidal event in 2115.

Therefore I consider that the sequential test has been passed.

Exception Test

The Sequential Test has demonstrated that it is not possible, consistent with wider sustainability objectives, for the development to be located in zones with a lower probability of flooding. The flood zones indicate that the area where the building will be located is within flood zone 1. The Exception Test must be applied and for this to be passed:

- It must be demonstrated that the development provides wider sustainability benefits to the community that outweigh flood risks, informed by the Strategic Flood Risk Assessment; and
- A site-specific flood risk assessment must demonstrate that the development will be safe for its lifetime taking into account of the vulnerability of its users, without increasing flood risk elsewhere, and where possible will reduce flood risk overall.

Both parts of this test must be satisfied for the development to be considered appropriate in terms of flood risk. There must be robust evidence in support of every part of the test.

The first section will be demonstrated by the Supporting Planning Statement and compliance with South Holland District Council's planning policies.

This flood risk assessment will demonstrate that the proposed dwelling will be safe for its lifetime and it will not increase flood risk elsewhere.

Strategic Flood Risk Assessment

The Strategic Flood Risk Assessment (SFRA) written for the South Holland District Council (SHDC) in 2010 provides details of the actual flood risk in the Council's area. This information has not been updated and reference to the maps in this document give the following information for the actual flood risk and hazard at the site for the 1% fluvial event and 0.5% tidal event.

For the present day	Depth of flooding ... zero
	Extent of flooding .. Low or medium flood probability
	Peak Velocity Nil
For year 2115	Depth of flooding ... zero
	Extent of flooding.... Low or medium flood probability
	Peak Velocity Nil

The maps showing the residual flood hazard were revised in the 2016 update of the South Holland District Council Strategic Flood Risk Assessment which can be found on the website of the South East Lincolnshire Joint Planning Committee. The residual hazards are as follows for the 1% fluvial or 0.5% tidal event probability:

For the present day	Depth of flooding ...zero
	Extent of flooding .. Low or medium flood probability
	Hazard..... None
	Peak Velocity .. Nil
For the year 2115	Depth of flooding ...zero
	Extent of flooding .. Low or medium flood probability
	Hazard..... None
	Peak Velocity .. Nil

Figure 16 of the general maps shows that the site is not within the rapid inundation zone.

Tables in the SFRA show the following details of the defence bank on the west side of the tidal section of the tidal section of the River Welland north of the River Glen outfall sluice, between chainage 15.0km and 16.1km.

	2007	2055	2115
Peak 1 in 200 year extreme tide level	5.99m OD	6.32m OD	7.13m OD
Peak 1 in 1,000 year extreme tide level	6.32m OD	6.65m OD	7.46m OD

With an average defence crest level between 7.50 and 7.70 m OD, apart from one low recorded level of 7.30m OD, the minimum freeboards are as follows:

	2007	2055	2115
Peak 1 in 200 year freeboard	1510mm	1180mm	370mm
Peak 1 in 1,000 year freeboard	1180mm	850mm	40mm

Tables in the SFRA show the following details for the predicted flood levels in the River Glen at chainage 3.8 km.

	2007	2115
Peak 1 in 100 year flood level	4.25m OD	4.65m OD
Peak 1 in 1,000 year flood level	4.38m OD	4.68m OD

The bank levels on this section vary between 4.33m OD and 5.3m OD on this length of the River Glen. Therefore it can be seen there is a risk of overtopping of some of the lower lengths of bank of the River Glen in the 1 in 100 year event in 2115.

Information from the Environment Agency


The Environment Agency has provided predicted flood levels for the River Glen which are taken from the 2016 Welland Catchment Strategic Model.

	2007	2115
Peak 1 in 100 year flood level	4.35m OD	4.40m OD
Peak 1 in 1,000 year flood level	4.82m OD	4.90m OD

The predicted flood levels for 2115 seem to have been computed ignoring any effect of overtopping that will occur between Bourne and the outfall once the river levels rise above 4.80m OD.

Information on Surface Water Flooding on Environment Agency Website

The map below shows the predicted areas of surface water flooding in the 1 in 1000 year event scenario in this area of Gosberton.

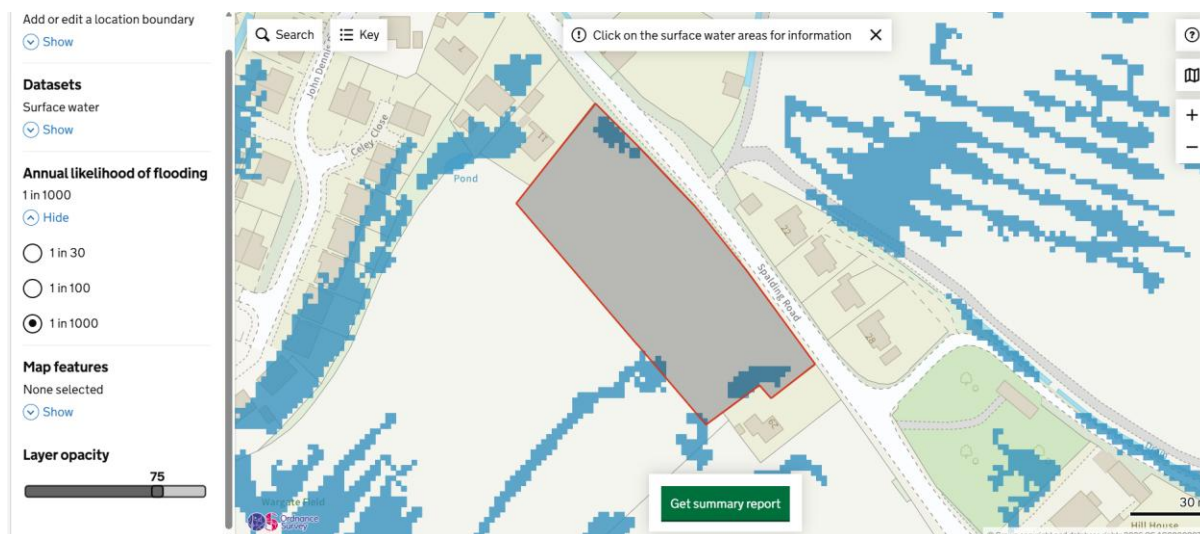

It can be seen there are two small areas where flooding is predicted in the 1 in 1000 year scenario. There is no flooding predicted on the site in a 1 in 100 year event.

Existing Ground Levels

The level of Spalding Road north east of the site is between 4.50m and 4.60m AOD.

The level of the site slopes down from the boundary adjacent to Spalding Road to a level of 3.90m OD 8.0 metres from the boundary and the level at the rear boundary of the site is approximately 3.50m OD.

A topographical survey of the site has been carried out and the plan showing the levels on the site will be included with the planning application.

Existing Flood Alleviation Measures

The site is within a defended flood plain, as defined in Appendix 1 of the Environment Agency's "Policy and Practice for the Protection of Flood Plains", which is considered to be passive until such time that a flood greater than the defences can withstand occurs. The likelihood of flooding occurring due to overtopping or failures of the defences is considered to be very low.

The site is located approximately 4.2 km west of the River Welland, which has a tidal defence bank which is maintained by the Environment Agency.

The site is located 3.0 km north of the River Glen which is maintained by the Environment Agency.

The site is 200 metres north of Risegate Eau which is the main watercourse in this catchment maintained by Welland and Deepings IDB

There are other smaller watercourses in the area that are maintained by Welland and Deepings IDB.

Potential Sources of Flooding

The potential sources of flooding to the site are:-

1. Failure or overtopping of tidal defences of the River Welland.
2. Overtopping or breach in the River Glen.
3. Flooding from watercourses maintained by Welland and Deepings IDB.
4. Flooding due to excess surface water run off from the development.

1. Failure or overtopping of tidal defences

The west bank of the tidal River Welland, which is approximately 4.2 km east of the site, has at least a 1 in 200 year standard of protection. It is extremely unlikely that flood water from a breach in the west bank of the River Welland south of the outfall sluice from the River Glen would cause flooding to the development site. The higher land and old sea banks, as well as Vernatt's Drain, would prevent flood water reaching the new A16. Flood water from a breach in the River Welland north of the outfall sluice from the River Glen at Surfleet would flow westwards towards the site. However there is higher land which would reduce the flow towards Gosberton. The flow would also flood into the Risegate Eau which would reduce the risk of any flooding to this site.

The maps of predicted flood depths on the South East Lincolnshire Planning website also confirm there is no predicted flood risk from this source in a 1 in 200 year event in 2115.

Therefore the risk of flooding from this source can be considered to be adequately mitigated.

2. Failure or overtopping of the banks of the River Glen

The 2010 SFRA gives predicted levels for the River Glen of 4.65m OD and 4.68m OD for the 1 in 100 year and 1 in 1000 year events in 2115. However the Environment Agency advise that the levels will be much higher at 4.40 and 4.90m OD for the 1 in 100 year and 1 in 1000 year events in 2115.

The levels of the earth bank on the north side of the River Glen between chainage 3.5km and 4.0 km which is directly south of the development site as shown in the 2010 SHDC SFRA, are shown below:

Chainage (km)	3.5	3.6	3.7	3.8	3.9	4.0
Bank level (m OD)	4.71	4.40	4.89	4.33	4.59	5.14

Peak water levels occur in the River Glen when the outfall into the tidal River Welland is tide locked. During this time the levels in the River Welland are higher than levels in the River Glen, even when the latter levels are very high. This closes the large timber doors at the sluices and prevents discharge from the River Glen into the River Welland for approximately 3 to 4 hours. Immediately upstream of the sluices is an area called Surfleet Reservoir where the area between the banks is much wider where excess water is stored.


If flood water flowed northwards from a breach in the north bank of the River Glen, it would be intercepted by the Risegate Eau Drain before it reached the southern side of Gosberton. Therefore in a 1 in 100 year event in 2115 flood water from this source is extremely unlikely to affect the proposed development site.

Therefore the risk of flooding from this source can be considered to be adequately mitigated.

3. Flooding from IDB watercourses

This area on the southern side of Gosberton village is drained by the Welland and Deepings IDB drain called Risegate Eau which is located south of the site.

The Risegate Eau is maintained by Welland and Deepings IDB, who also maintain the watercourses shown below.

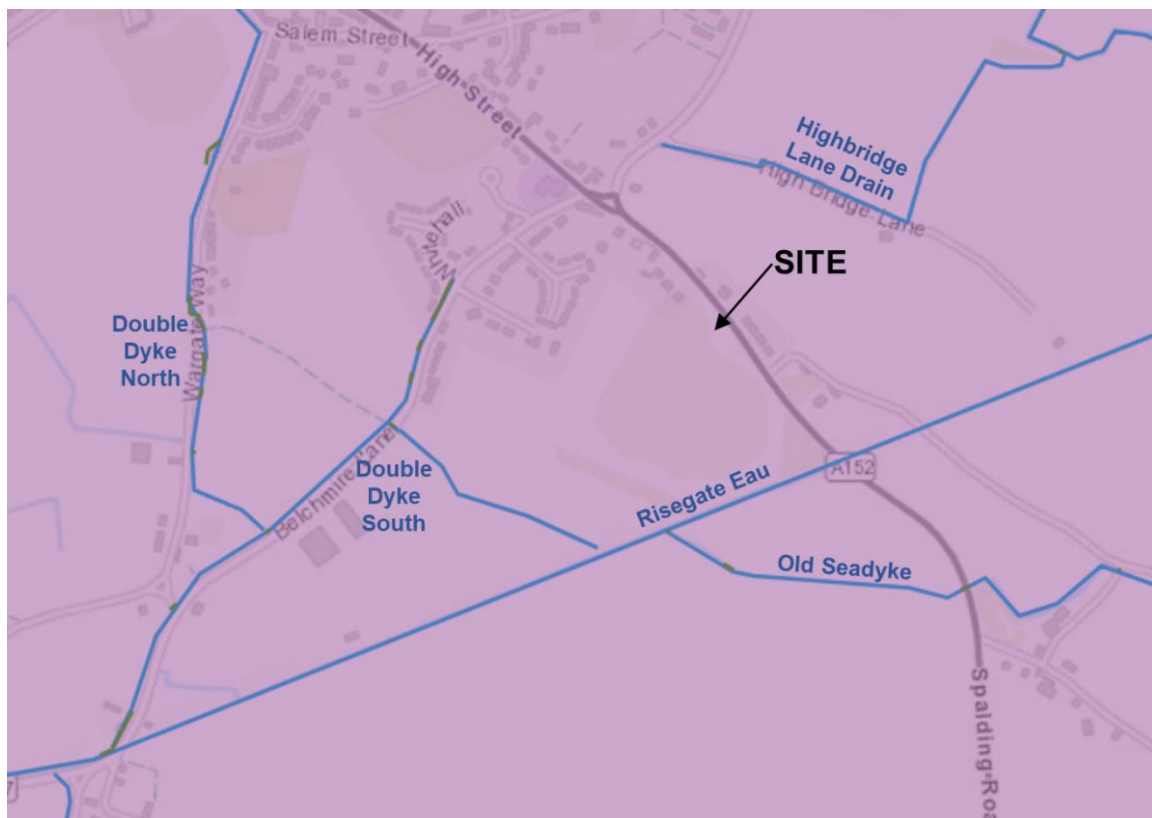

Risegate Eau provides drainage for the whole fen area of Gosberton and Quadring. The water level in Risegate Eau is controlled at the outfall near Fosdyke Bridge with an outfall sluice and a pumping station. For most situations the water is discharged into the tidal River Welland through the sluices at low tide. However in high flow

situations after heavy rainfall the pumps need to be operated to control the water levels in the catchment.

The Welland and Deeping IDB drains have been designed to a 1 in 10 year standard with a freeboard of between 800mm and 1.0 metres. This generally provides a standard of at least 1 in 50 years for flooding of the lowest land. Much of the land in the catchment is below 3.00m OD and therefore even if the pumps fail to operate for a considerable time during a rainfall event the proposed building would be unlikely to flood. The normal water level in the Risegate Eau is 0.00m OD at the outfall. The maximum design level in the Risegate Eau immediately south of the site in a 1 in 100 year event is 1.79m AOD, which is 1.7 metres lower than the lowest ground levels on the proposed site.

Therefore the risk of flooding from this source can be considered to be adequately mitigated.

4. Flooding due to excess surface water run off from the development

Surface water from the roofs of the proposed buildings will be discharged into soakaways which will be designed to BRE Digest 365 and approved under Building regulations.

Extent of known Flooding

During the preparation of this assessment, no evidence was discovered of the site being flooded in the last forty years.

Probabilities and Trends of Flooding

The probability of this development flooding from Environment Agency main river is very low. In an extreme event any effect on this location would not be sudden and there would be time for residents to take precautionary measures to limit the impact of any flooding that may occur.

Residual Risk – Extreme Events

The residual risk from extreme events is very low on this site. There is a risk to the site is from a breach or overtopping of the tidal defences.

The risk of this event happening on this site is low and the hazard from any flooding is also low.

Climate Change


The recommendations for flood depths for this flood risk assessment use information mostly taken from the South Holland DC SFRA which was last updated in 2010. The EA have issued new guidance on recommended contingency allowances for predicted sea rises, fluvial flows and rainfall intensities which from 19th February 2016 needs to be considered in this FRA. The effects of these new recommendations are considered in Appendix A of this report (pages 13 to 16). It is concluded that no extra mitigation measures are necessary to comply with the new guidance on climate change.

South East Lincs Advice Matrix

Advice can be found on the recommended mitigation required by referring to a spreadsheet on the South East Lincolnshire website. As all of the development is in flood zones 1 or 2 and there is no flood hazard reference should be made to Category H4 which shows that the advice in the matrix for this category is “No Comment”.

Conclusions

The maps in the SFRA do not predict any flooding to any part of the area around Gosberton in a 1 in 100 year fluvial event or a 1 in 200 year tidal event in 2115. The relevant part of the map is shown below.

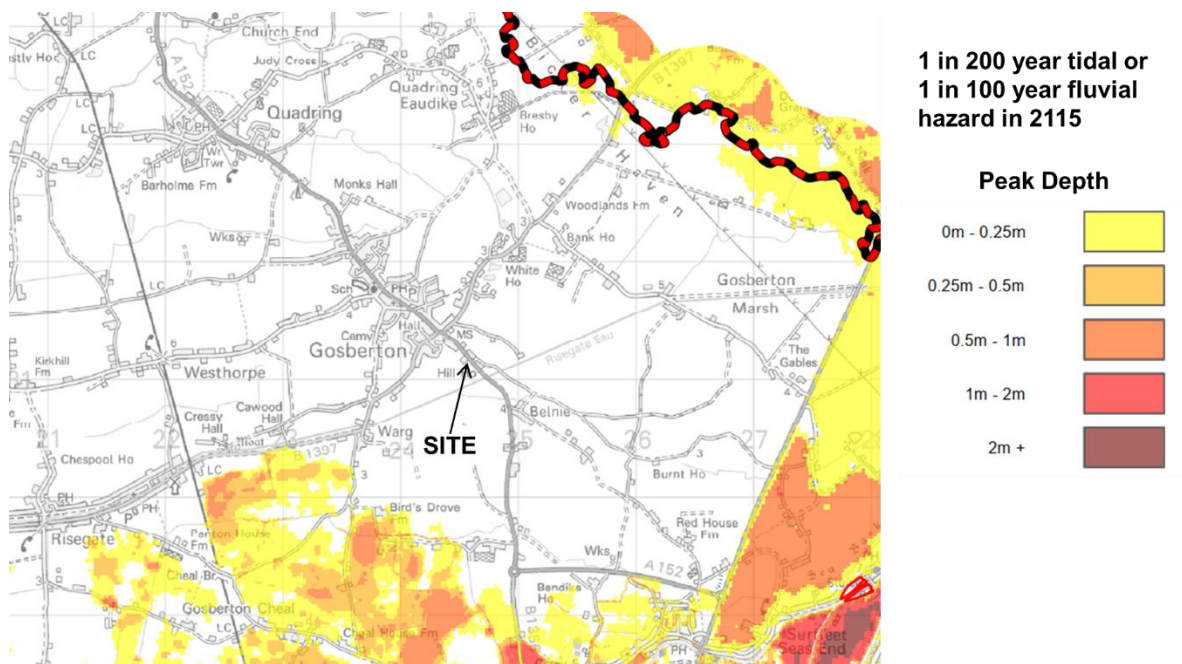

The risk of flooding from IDB drains can be considered low, because the lowest ground levels on the site are at least 1.7 metres above the normal level of the Risegate Eau and its tributaries.

If Risegate Eau Pumping Station were to fail then the IDB have adequate arrangements to operate pumps with alternative motive power, or to bring in mobile pumps. Welland and Deepings IDB have advised that the 1 in 100 year predicted level at this pumping station is unlikely to exceed 1.00m OD in a 1 in 100 year event. It can be assumed that the IDB will continue to monitor predicted water levels in the drain and carry out improvements to the system over the next 100 years to retain the present standard.

The risk of flooding from surface water flowing onto the site from Spalding Road will be adequately mitigated as the floor level of the proposed buildings will be 300mm above the existing ground level on the site.

The proposed development is not in a functional flood plain as defined by PPS 25.

Recommendations

In any area at risk of flooding it is preferable that new dwellings should be of two storey construction with all bedrooms at first floor level. This is to provide a refuge for residents if the buildings were to become flooded after a major breach of the tidal or fluvial bank, and ensure there is no danger to residents when they are asleep.

The ground floor level of the proposed dwellings with all bedrooms on the first floor should be raised a minimum of 300mm above existing ground level in the immediate area of the houses.

All future owners and occupiers of the dwellings should register with the Environment Agency's Floodline Warnings Direct Service.


Rainwater from the roofs of the buildings should be discharged if possible into soakaways and these should be designed to BRE Digest 365 and approved under Building regulations.

S M HEMMINGS B Sc C Eng MICE MIWEM

stuart.hemmings@btinternet.com

27th March 2026

LOCATION PLAN

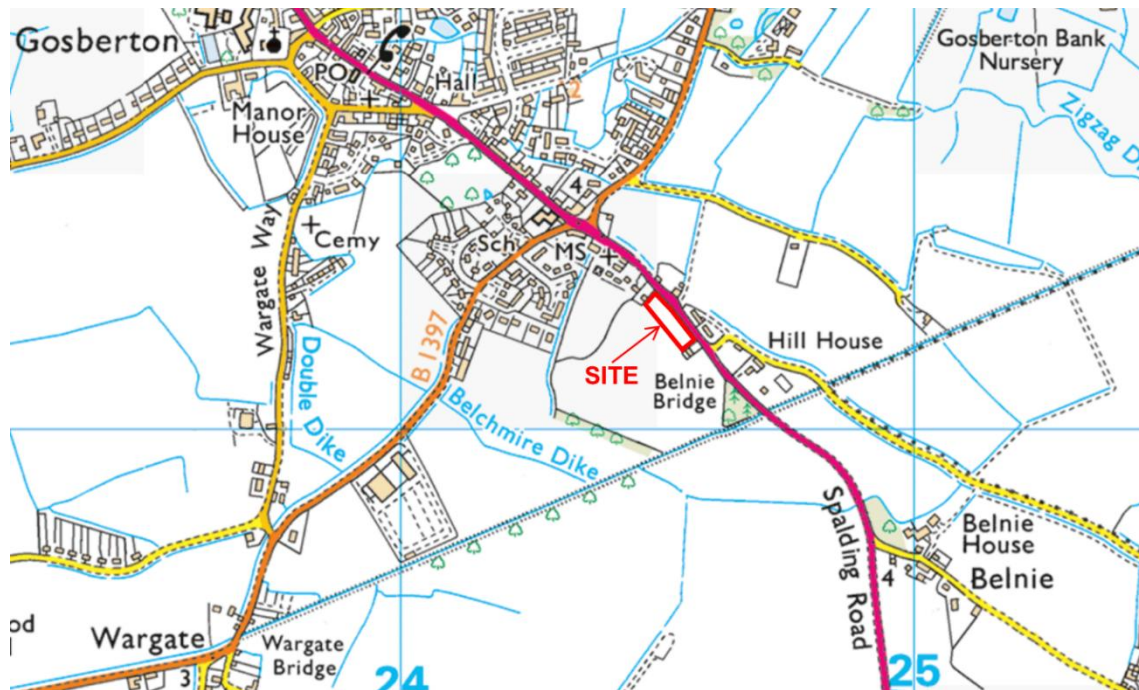

PROPOSED BLOCK PLAN OF DEVELOPMENT



APPENDIX A CLIMATE CHANGE

The Environment Agency has issued revised guidance on climate change and have now stated that the new predictions should be considered and incorporated into all flood risk assessments produced after 19th February 2016.

Listed below are the climate change allowances in three documents:

- South Holland SFRA
- EA guidance (2013)
- Revised EA guidance

The recommendations in each document are shown below.

2010 South Holland DC SFRA

The SHDC SFRA states that the the following allowances have been made for climate change:

4.4 Climate Change

Scenarios for the years 2055 and 2115 include for climate change contingency allowances to the amount suggested by PPS25¹. These allowances are expressed in Table 2. Percentage increases are relative to the present-day.

Table 2 – Adopted Climate change contingency allowances

Parameter	Year 2055	Year 2115
Sea level rise (m)	+ 0.33	+ 1.14
Extreme wave height	+ 10%	+ 10%
Peak river flow and volume	+ 20%	+ 20%
Peak rainfall intensity	+ 20%	+30%

Where flows arise from pumping rather than natural run-off, notably in the Vernatt's Drain and for the Fenland subcatchments of the South Forty Foot Drain, peak flow rates for future eras have been taken as equal to current rates since this SFRA assumes all flood risk management measures will remain in their current state.

2013 Guidance to Planners

Guidance to planners was issued by EA in September 2013

Table 1: Recommended contingency allowances for net sea level rises (Net sea level rise (mm per year) relative to 1990)

	1990 to 2025	2025 to 2055	2055 to 2085	2085 to 2115
East of England, east midlands, London, south-east England (south of Flamborough Head)	4.0	8.5	12.0	15.0
South-west England	3.5	8.0	11.5	14.5
North-west England, north-east England (north of Flamborough Head)	2.5	7.0	10.0	13.0

Table 2: Recommended national precautionary sensitivity ranges for peak rainfall intensity, peak river flow, offshore wind speed and wave height

Parameter	1990 to 2025	2025 to 2055	2055 to 2085	2085 to 2115
Peak rainfall intensity	+5%	+10%	+20%	+30%
Peak river flow	+10%	+20%		
Offshore wind speed	+5%		+10%	
Extreme wave height	+5%		+10%	

Current Peak EA River Flow Guidance

The current peak river flow allowances for the Welland Management Catchment are as follows:

	2020's (2015 – 39)	2050's (2040 – 69)	2080's (2070 – 2115)
Upper End	22%	26%	53%
Higher central	10%	10%	28%
Central	5%	4%	17%

For more vulnerable development in flood zone 3(a) the higher central should be used to assess the range of allowances.

Table 2 peak rainfall intensity allowance in small and urban catchments (use 1961 to 1990 baseline)

Applies across all of England	Total potential change anticipated for 2010 to 2039	Total potential change anticipated for 2040 to 2059	Total potential change anticipated for 2060 to 2115
Upper end	10%	20%	40%
Central	5%	10%	20%

Table 3 sea level allowance for each epoch in millimetres (mm) per year with cumulative sea level rise for each epoch in brackets (use 1990 baseline)

Area of England	1990 to 2025	2026 to 2050	2051 to 2080	2081 to 2115	Cumulative rise 1990 to 2115 / metres (m)
East, east midlands, London, south east	4 (140 mm)	8.5 (212.5 mm)	12 (360 mm)	15 (525 mm)	1.24 m

Table 4 offshore wind speed and extreme wave height allowance (use 1990 baseline)

Applies around all the English coast	1990 to 2050	2051 to 2115
Offshore wind speed allowance	+5%	+10%
Offshore wind speed sensitivity test	+10%	+10%
Extreme wave height allowance	+5%	+10%
Extreme wave height sensitivity test	+10%	+10%

Effects on Predictions of Flood Risk in FRA

The FRA has identified three sources of flooding where the new climate change recommendations could affect the predictions of flood levels in 2115 at the development site:

- 1) Flooding from the tidal River Welland.
- 2) Flooding from the River Glen.
- 3) Flooding from IDB systems.

1) Flooding from the tidal River Welland

The contingency allowance in metres for the years 2055 and 2115 using 1990 as a baseline in the SFRA compared with the guidelines is as follows

Year	SFRA	2013 guidance	Revised 2016 guidance
2055	0.33	0.395	0.412
2115	1.14	1.205	1.24

The SFRA does not predict any residual flooding on any part of the site in a 1 in 200 year event in 2115. The risk of flooding from the tidal River Welland is extremely low due to the reasons set out on page 7 of this report.

An increase of 100mm in maximum tidal levels is only likely to increase the maximum flood depths by around 10mm at the location of the development site, and is unlikely to significantly change the predicted flood depths indicated on the maps in this flood risk assessment.

The precaution of recommending that the proposed property should be a minimum of 300mm above existing ground level is considered to satisfactory.

2) Flooding from the River Glen

As part of the development is in flood zone 3 and is classed as less vulnerable, the central climate change allowance, which is 25%, should first be considered. After considering the effects of this increase the higher central allowance, which is 35%, should be considered to assess the effect of this.

The EA have been using an allowance of 20% for climate change over the past few years in their assessments and modelling of their systems. The increase to 25% will not significantly change the conclusion in the SFRA of what might happen if a breach occurred in the bank of the River Glen. If there are additional flows along this part of the River Glen it will lead to additional overtopping over lower banks rather than any significant increase in levels in the river.

The upper end allowance predicting a 35% increase in flows above the 1 in 100 year predicted flows now needs to be considered. The River Glen is an embanked watercourse between Spalding and Bourne. It is unlikely that there will be any significant increase in the water level in the River. Therefore the consequence will not be significantly different to the maps produced in this flood risk assessment.

3) Flooding from IDB Systems

Welland and Deepings IDB, and all IDB's, are aware that climate change will affect the operations of pumping stations, sluices and drainage channels. Pumping stations and sluices only have a 30 year life and will need to be refurbished or rebuilt within this timespan. It is assumed that Welland and Deepings IDB will continue to review the modelling they have already carried out and when the Board consider refurbishments adequate arrangements will be made to incorporate the latest climate change projections in order that Board continues to provide the same standard of service as the present day.

Therefore it is considered that the conclusion that adequate mitigation is proposed for the development is not changed by any of the climate change factors above.