




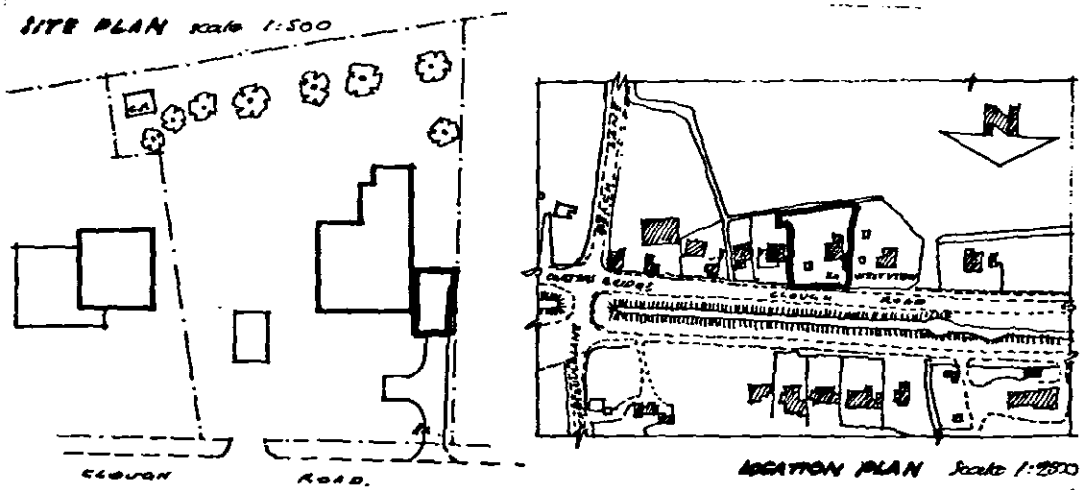


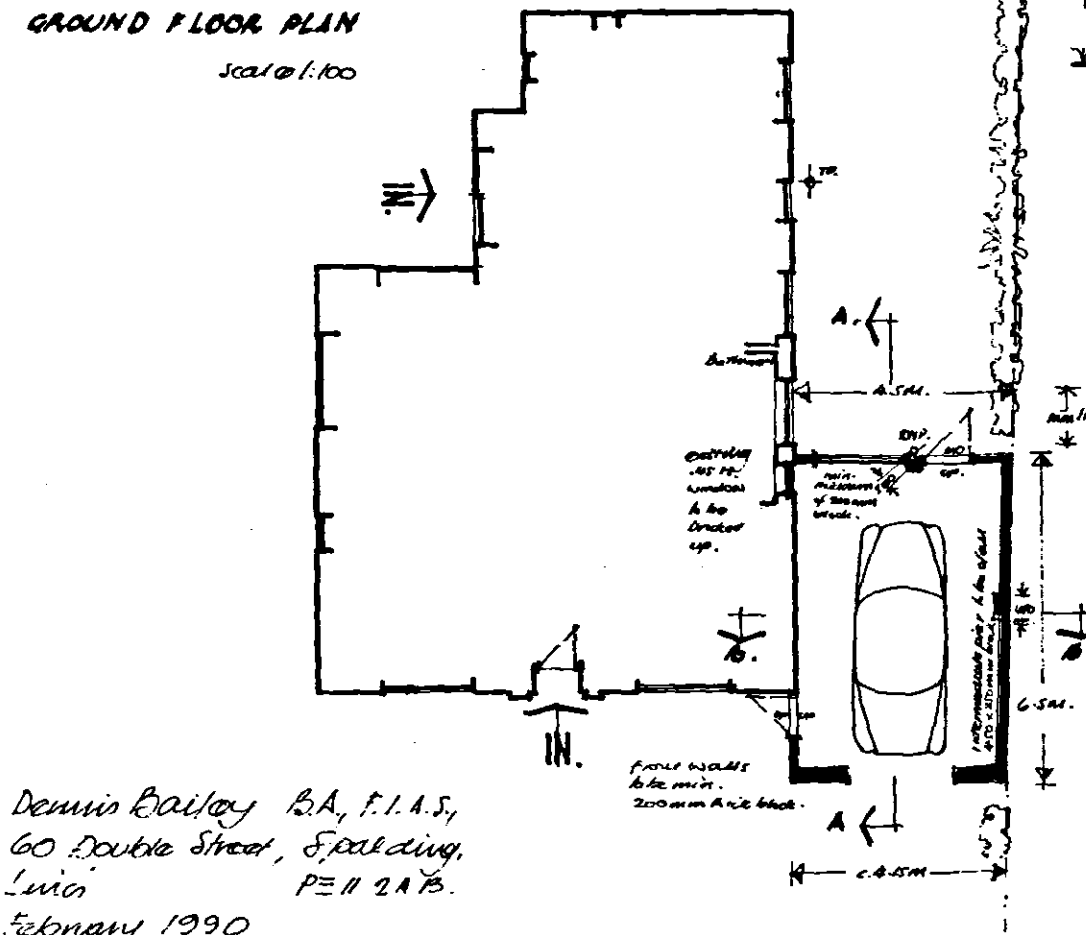


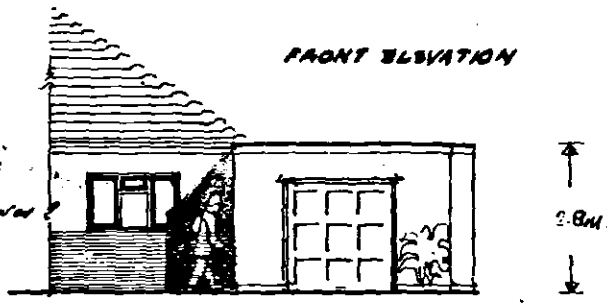

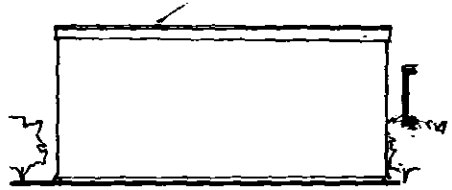



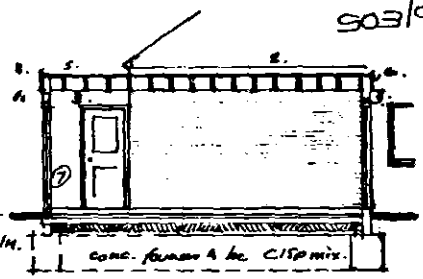



(4) Provide anchor straps between joists and walls where parallel @ 2m max. centres at min. two from each gable.

503/90

(9) 450mm trench fill foundation in min. 1m trench to BCO's. instruction on site

(10) 50mm cement screed on 100mm concrete over site on 1000 gauge membrane on blinded hardcore.

Specification notes

(1) Catnic lintel CN56XA or CN60XA or equivalent (2) 150mm lead (4lb) flashing (3) CN 102 overreach door opening (4) 175 x 50mm joists with central solid strutting on joist hangers & existing wall (5) 3ply roofing felt with mineral spar chip finish. (6) 100mm h.r. gutter into 65mm down pipe (all plastic) link prepared soakaway link. which is min 5m. from any building (7) 150mm cavity brick with hardcore apex (150mm above gl.) rendered externally above 150mm with mineral plinth (8) 200 x 25mm eaves box capped with "PATRITE" aluminium trim (& accept 12mm plywood roof deck for felt.

Proposed garage at 11a. Clough Road,

Gosberton Risegate, Lincs, for Mr. M. Chinn

Dennis Bailey B.A., F.I.A.S.,
60 Double Street, Spalding,
Lincs PE11 2AB.

February 1990