

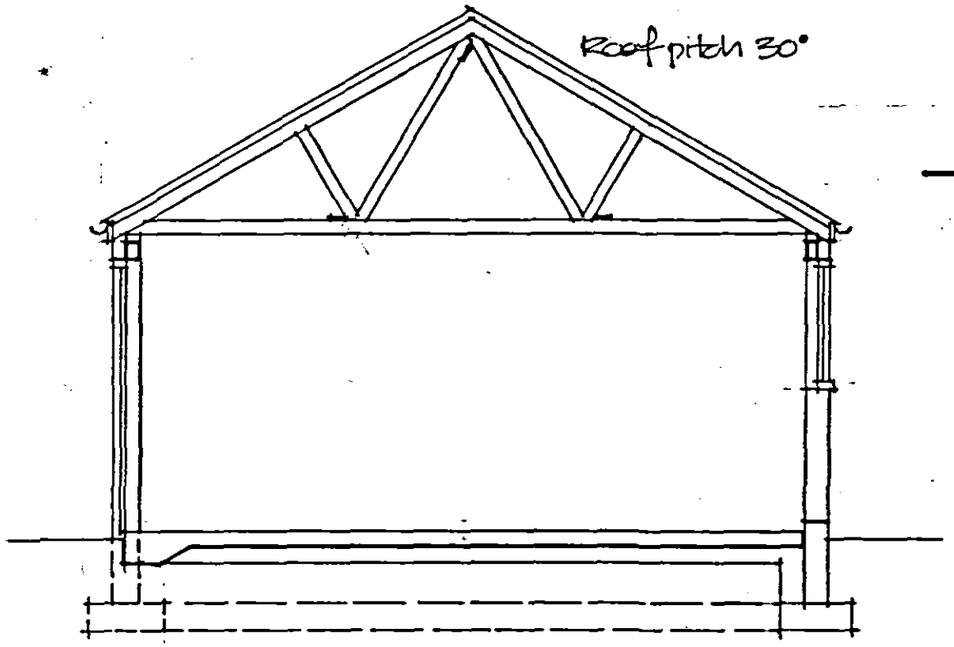



SECTION

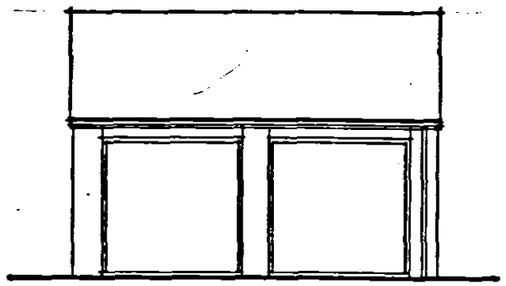

SOUTH ELEVATION

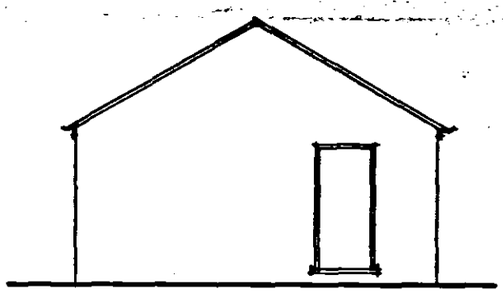

SIDE ELEVATION
(West elevation the same but with no personel door).

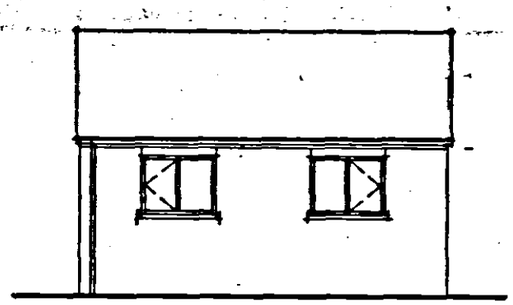

NORTH ELEVATION

Roof construction:

Interlocking concrete tiles to match existing cottage on 25x50 fully treated battens on sarking felt on gangnail roof trusses at 600mm max. ctrs.

25x100 longitudinal ties.
25x150 fascia board.
30x5mm M.S straps at average 1.800 cts between roof and walls.

112mm hr. UPVC gutters with 68mm dia. downpipes connected to 110mm dia. UPVC drains to soakpit.


Walls formed of 215mm brickwork with facing bricks to match cottage extension. DPC installed min. 150mm above ground level.

Install 1 No. R.S. box lintel 200 steel lintels to all openings.

Install 2 No. ref. 7010 up and over garage doors.
Install 2 No. timber/UPVC framed windows 1200x1050
Install 1 No. personel door and frame.

Floor constructed of 100mm thick grade Gen 3 concrete slab with float finish and thickened to approx. 250mm below garage doors on 1200 gauge dpm on min. 150mm hardcore well blinded and consolidated.

Foundations to be 225x600 grade Gen3 installed min. 750mm below ground (min 1.000 in shrinkable soil)

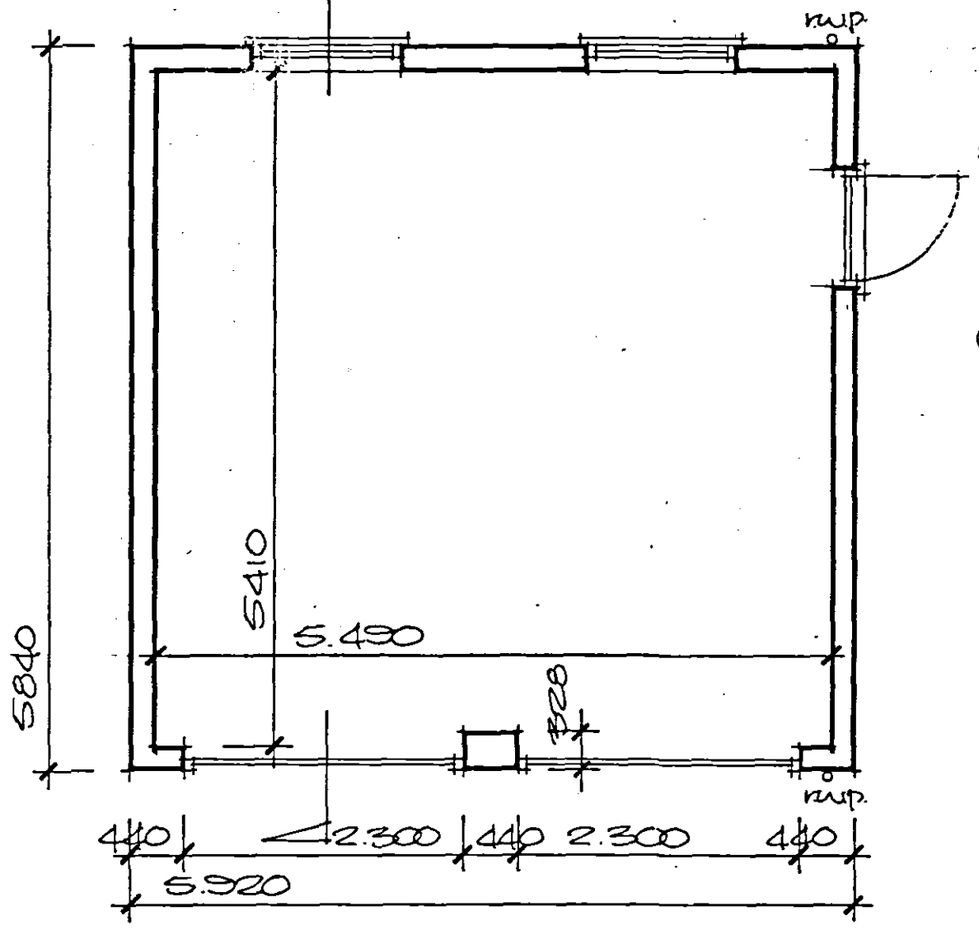

DETERMINED PLAN

SHDC
Planning & Development
31 JUL 2003
Ref 0950/03

PROPOSED GARAGE
BLOSSOM HILL,
SHORT DROVE,
GOSBERTON CLOUGH.
MR & MRS R. FIRTH

Alan Hornsby
Architectural Services
Little Acre, Peak Hill, Cowbit,
Spalding, Lincs. PE12 6AW
Tel: Holbeach (01406) 380591

Scales 1:50/1:100 Dg.no. CB/58/02
July 03.