


CONTRACTOR TO TAKE NOTE: All existing and proposed dimensions are to be checked on site and any discrepancies to be notified immediately. Commencement of works on site will be deemed as all dimensions have been checked. Due to areas of the structure being covered, unexposed or otherwise inaccessible the existing / proposed dimensions / notes / specifications of existing materials are subject to confirmation of site when it is feasible to expose the relevant areas of construction. All material schedules are given in good faith and for pricing purposes only. It is the responsibility of the contractor to check their accuracy before ordering any materials. Remway Design accepts no responsibility for the accuracy of these material schedules.

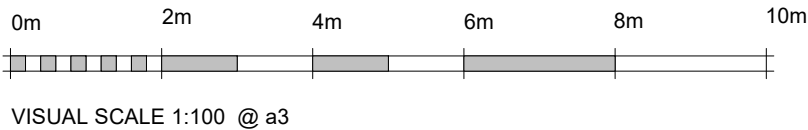


07 - Window Schedule (Sizes subject to site survey)		
Mark	Width	Height
W1	910	2100
W2	910	2100
W3	910	2100
W4	1248	1200
W5	1248	1200
W6	910	1050
W7	665	450
W8	1810	450
W9	2485	1200
W10	550	980
W11	550	980
W12	1248	1200
W13	1248	1200
W14	550	980
W15	550	980
Grand total: 15		


08 - External Door Schedule (Sizes subject to site survey)		
Mark	Width	Height
ED1	1250	2100
ED2	3610	2100
ED3	1023	2100
Grand total: 3		

EXTERNAL MATERIALS SCHEDULE

- Brindle block paved drive,paths and patio
- White uPVC windows and doors
- Black r/w goods
- Black uPVC fascia and soffit
- Hanson Rural Blend brickwork
- Sandtoft Calderdale Slate Concrete Tiles
- Velux r/windows

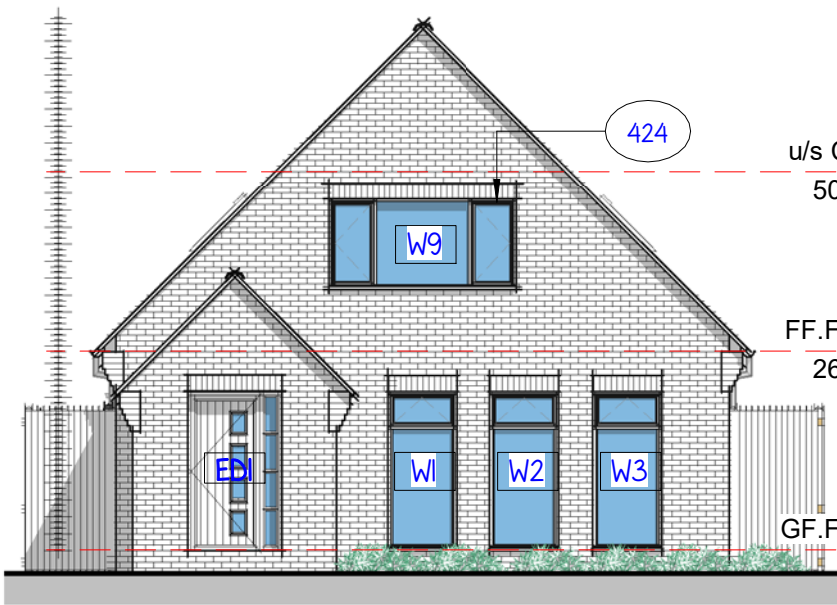

Elevation 01 - Front
1 : 100

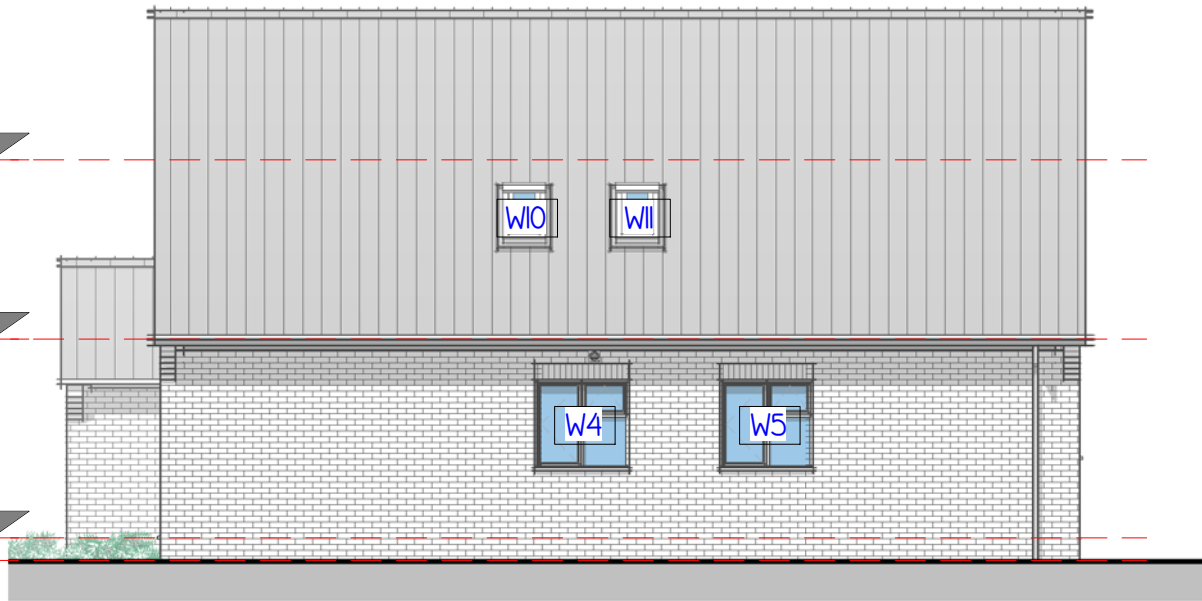

Elevation 02 - Right
1 : 100



Elevation 03 - Rear
1 : 100



Elevation 04 - Left
1 : 100