
RevNo	Revision note	Date	Signature	Checked

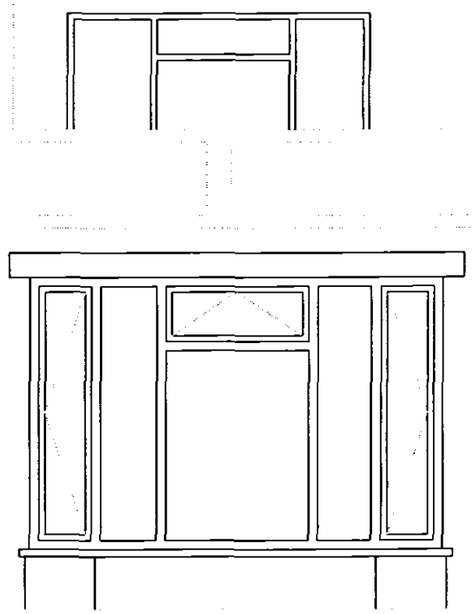

SOUTH EAST ELEVATION

PROPOSED CONSERVATORY
CAUWOOD HALL
CAUWOOD
GOSBERTON

NOTES

ALL DIMENSIONS TO BE CHECKED ON SITE

450mm HIGH DWARF WALL, FROM TOP OF DAMP COURSE. WALL TO BE RENDERED TO MATCH EXISTING.

UPVC FRAMED WINDOW UNITS COMPRISING OF FIXED LIGHTS AT THE BOTTOM, WITH TOP HUNG OPEN OUT VENTS ABOVE. COLOUR TO BE WHITE.

ROOF CONSTRUCTION TO BE OF UPVC RAFTERS WITH ALUMINIUM STRENGTHENING INSERTS. ROOF PANELS ARE TO BE 25mm BRONZED TINT POLYCARBONATE INSERTS.

FIXED LIGHT GLAZING TO BE 28mm COMPRISING:
4mm PILKINGTON TOUGHENED SAFETY GLASS INNER
20mm AIR FILLED SILVER SPACER
4mm PILKINGTON TOUGHENED SAFETY GLASS OUTER

DOOR GLAZING TO BE 28mm COMPRISING:
4mm PILKINGTON TOUGHENED SAFETY GLASS INNER
20mm AIR FILLED SILVER SPACER
4mm PILKINGTON TOUGHENED SAFETY GLASS OUTER

OPENING LIGHT GLAZING TO BE 28mm COMPRISING:
4mm PILKINGTON ANNEALED FLOAT INNER
20mm AIR FILLED SILVER SPACER
4mm PILKINGTON ANNEALED FLOAT INNER

PLEASE SEE ATTACHED SHEET CONTAINING
3D VIEWS OF UNIT.

SHDC
PLANNING & DEVELOPMENT
26 SEP 2003
Ref. 1181/03

OUTSIDE DEPTH TO BE 3999mm
OUTSIDE WIDTH TO BE 4000mm
INTERNAL VOLUME: 33.43 cu.m
EXTERNAL VOLUME: 37.89 cu.m
INTERNAL FLOOR AREA 12.35 sq.m
FRAME HEIGHT 2100mm
MAX HEIGHT FROM INTERNAL FFL TO CONSERVATORY RIDGE 2904mm INCLUDING DECORATIVE CAPPING.

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
Designed by N Fairbanks		Checked by	Approved by - date	File name Wright	Date 22/09/03	Scale 1:50
PLATINUM DESIGN					SOUTH EAST ELEVATION	
					001	Edition 0 Sheet 1/1

DETAILED