

**PROPOSED RESIDENTIAL DEVELOPMENT SOUTH OF THE
WILLOWS, MILL LANE, GOSBERTON, SPALDING, PE11 4NN**
FLOOD RISK ASSESSMENT



View of site looking south

S M Hemmings B Sc C Eng MICE MIWEM,
13 Lea Gardens
Peterborough
PE3 6BY

This flood risk assessment has been prepared solely to support the planning application for a development south of The Willows, Mill Lane, Gosberton. The author has made every effort to provide an accurate assessment of the flood risk but accepts no liability should the information be found to be incorrect or incomplete, or if it is used for any purposes other than for which it was originally commissioned.

Introduction


A planning application is due to be submitted to South Holland District Council for permission to construct a bungalow south of the existing house “The Willows” in Mill Lane in the village of Gosberton, PE11 4NN. The site is located on the southern side of Gosberton and the land is at present part of the large grassed garden of “The Willows”.

The site is within Flood Zone 3 as shown on the Environment Agency’s Flood Zone map. The flood zone maps do not take into account existing flood defences.

The Planning Application requires a flood risk assessment to be carried out as specified in the Practice Guidance to the National Planning Policy Framework Development and Flood Risk. The site is within a defended area as specified on the South Holland District Council’s Strategic Flood Risk Assessment (SHDC SFRA) map and is located in the Welland and Deepings Internal Drainage Board District.

Environment Agency (EA) Flood Zones

The map below is taken from the Environment agency website and shows the flood zones in this area.

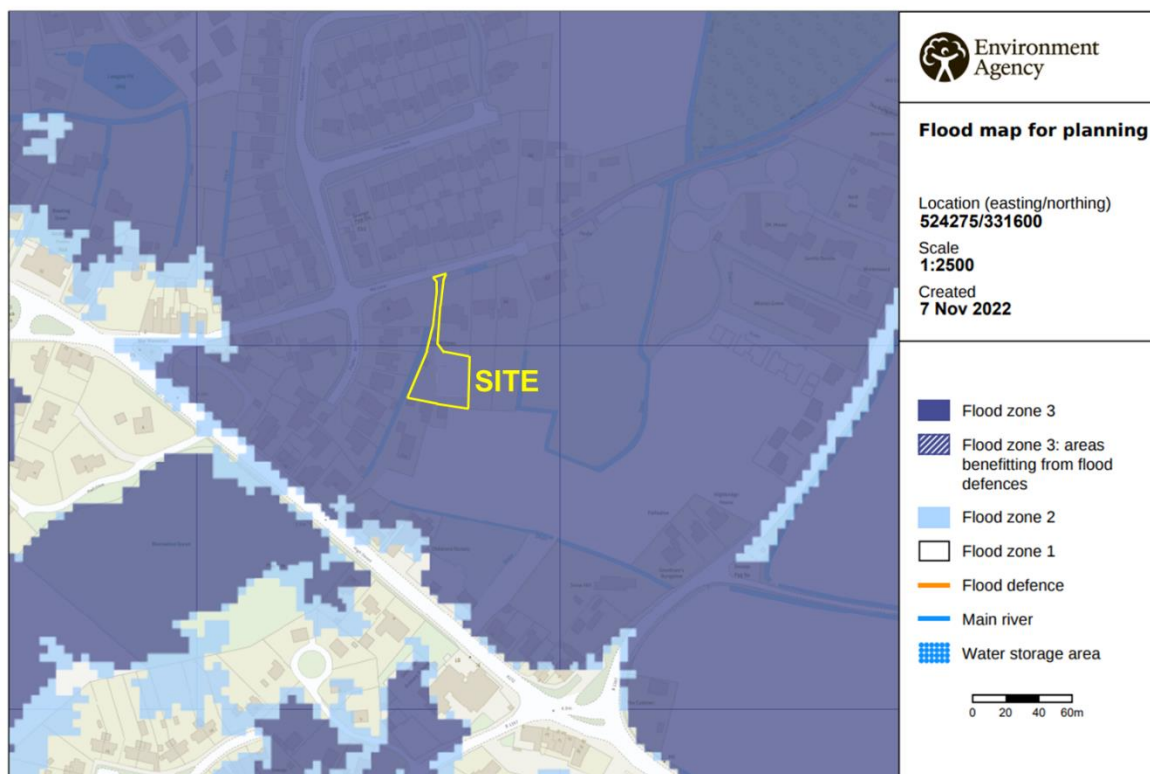

It can be seen that all of the site is within flood zone 3.

Application Site

The site is located 4.7 km from the tidal section of the River Welland. The National Grid Reference of the site is 524275 331600.

The position and extent of the site is shown on the plan at the end of this document.

As the site is within a defended area, the proposed development can be considered to be within Flood Zone 3(a) as detailed on the Environment Agency's flood zone maps without defences, as defined in Table 1 of the Technical Guidance.

Applying the flood risk vulnerability classification in Table 2 of the Guidance, a residential development is classified as "more vulnerable".

Table 3 of the Guidance is shown below:

<u>Flood Zones</u>	<u>Flood Risk Vulnerability Classification</u>				
	Essential infrastructure	Highly vulnerable	More vulnerable	Less vulnerable	Water compatible
Zone 1	✓	✓	✓	✓	✓
Zone 2	✓	Exception Test required	✓	✓	✓
Zone 3a †	Exception Test required †	X	Exception Test required	✓	✓
Zone 3b *	Exception Test required *	X	X	X	✓*

From the table above it can be seen that "More Vulnerable" development in flood zone 3(a) the sequential and the exception tests need to be applied to the development.

Sequential Test

The aim of the Sequential Test, as set out in the Planning Practice Guidance, is to ensure that a sequential approach is followed to steer new development to areas with the lowest probability of flooding. The flood zones as defined in the Strategic Flood Risk Assessment for the area provide the basis for applying the Test. The aim is to steer new development to Flood Zone 1 (areas with a low probability of river or sea flooding). Where there are no reasonably available sites in Flood Zone 1, local planning authorities in their decision making should take into account the flood risk vulnerability of land uses and consider reasonably available sites in Flood Zone 2 (areas with a medium probability of river or sea flooding), applying the Exception Test if required. Only where there are no reasonably available sites in Flood Zones 1 or 2 should the suitability of sites in Flood Zone 3 (areas with a high probability of river or sea flooding) be considered, taking into account the flood risk vulnerability of land uses and applying the Exception Test if required.

The flood zone map shows the site is within flood zone 3. All of the area north east of High Street is within flood zone 3 and therefore it is unlikely that an alternative site in flood zone 1 or 2 could be found in this area of Gosberton.

The South East Lincolnshire Local Plan adopted in March 2019 recognises in paragraph 5.3.5 that infill and speculative applications will come forward within the South Holland District Council area. It states that there will be numerous opportunities for infill developments which it is not practical to identify, and the plan encourages these type of developments provided that the material considerations of the Local Plan and particular sites are met.

The safety of the development will be delivered by ensuring the floor level of the proposed new dwelling is above the predicted residual flood levels for this area in a 1 in 1000 year fluvial or tidal event in 2115.

Therefore I consider that the sequential test has been passed.

Exception Test

The Sequential Test has demonstrated that it is not possible, consistent with wider sustainability objectives, for the development to be located in zones with a lower probability of flooding. Therefore the Exception Test must be applied and for this to be passed:

- It must be demonstrated that the development provides wider sustainability benefits to the community that outweigh flood risks, informed by the Strategic Flood Risk Assessment; and
- A site-specific flood risk assessment must demonstrate that the development will be safe for its lifetime taking into account of the vulnerability of its users, without increasing flood risk elsewhere, and where possible will reduce flood risk overall.

Both parts of this test must be satisfied in order for the development to be considered appropriate in terms of flood risk. There must be robust evidence in support of every part of the test.

The first section will be demonstrated by the Supporting Planning Statement and compliance with South Holland District Council's planning policies.

This flood risk assessment will demonstrate that the development will be safe for its lifetime and it will not increase flood risk elsewhere.

Strategic Flood Risk Assessment

The Strategic Flood Risk Assessment (SFRA) written for the South Holland District Council (SHDC) in 2010 provides details of the actual flood risk in the Council's area. This information has not been updated and reference to the maps in this document give the following information for the actual flood risk and hazard at the site for the 1% fluvial event and 0.5% tidal event.

For the present day	Depth of flooding ... zero
	Extent of flooding .. Low or medium flood probability
	Peak Velocity Nil
For year 2115	Depth of flooding ... zero

Extent of flooding.... Low or medium flood probability

Peak Velocity Nil

The maps showing the residual flood hazard were revised in the 2016 update of the South Holland District Council Strategic Flood Risk Assessment which can be found on the website of the South East Lincolnshire Joint Planning Committee. The residual hazards are as follows for the 1% fluvial or 0.5% tidal event probability:

For the present day Depth of flooding ...zero
 Extent of flooding .. Low or medium flood probability
 Hazard..... None
 Peak Velocity .. Nil

For the year 2115 Depth of flooding ...zero
 Extent of flooding .. Low or medium flood probability
 Hazard..... None
 Peak Velocity .. Nil

Figure 16 of the general maps shows that the site is not within the rapid inundation zone.

Tables in the SFRA show the following details of the defence bank on the west side of the tidal section of the River Welland north of the River Glen outfall sluice, between chainage 15.0km and 16.1km.

	2007	2055	2115
Peak 1 in 200 year extreme tide level	5.99m OD	6.32m OD	7.13m OD
Peak 1 in 1,000 year extreme tide level	6.32m OD	6.65m OD	7.46m OD

With an average defence crest level between 7.50 and 7.70 m OD, apart from one low recorded level of 7.30m OD, the minimum freeboards are as follows:

	2007	2055	2115
Peak 1 in 200 year freeboard	1510mm	1180mm	370mm
Peak 1 in 1,000 year freeboard	1180mm	850mm	40mm

Tables in the SFRA show the following details for the predicted flood levels in the River Glen at chainage 3.8 km.

	2007	2115
Peak 1 in 100 year flood level	4.25m OD	4.65m OD
Peak 1 in 1,000 year flood level	4.38m OD	4.68m OD

The bank levels on this section vary between 4.33m OD and 5.3m OD on this length of the River Glen. Therefore it can be seen there is a risk of overtopping of some of the lower lengths of bank of the River Glen overtopping in the 1 in 100 year event in 2115.

Information from the Environment Agency


The Environment Agency has provided predicted flood levels for the River Glen which are taken from the 2016 Welland Catchment Strategic Model.

	2007	2115
Peak 1 in 100 year flood level	4.35m OD	4.40m OD
Peak 1 in 1,000 year flood level	4.82m OD	4.90m OD

The predicted flood levels for 2115 seem to have been computed ignoring any effect of overtopping that will occur between Bourne and the outfall once the river levels rise above 4.80m OD.

Information on Surface Water Flooding on Environment Agency Website

The map below shows the predicted depths of surface water flooding in this area of Gosberton. The light blue areas indicate the low risk of up to 300mm of surface water flooding, and the darker blue areas indicate that between 300mm and 900mm of surface water flooding could occur.

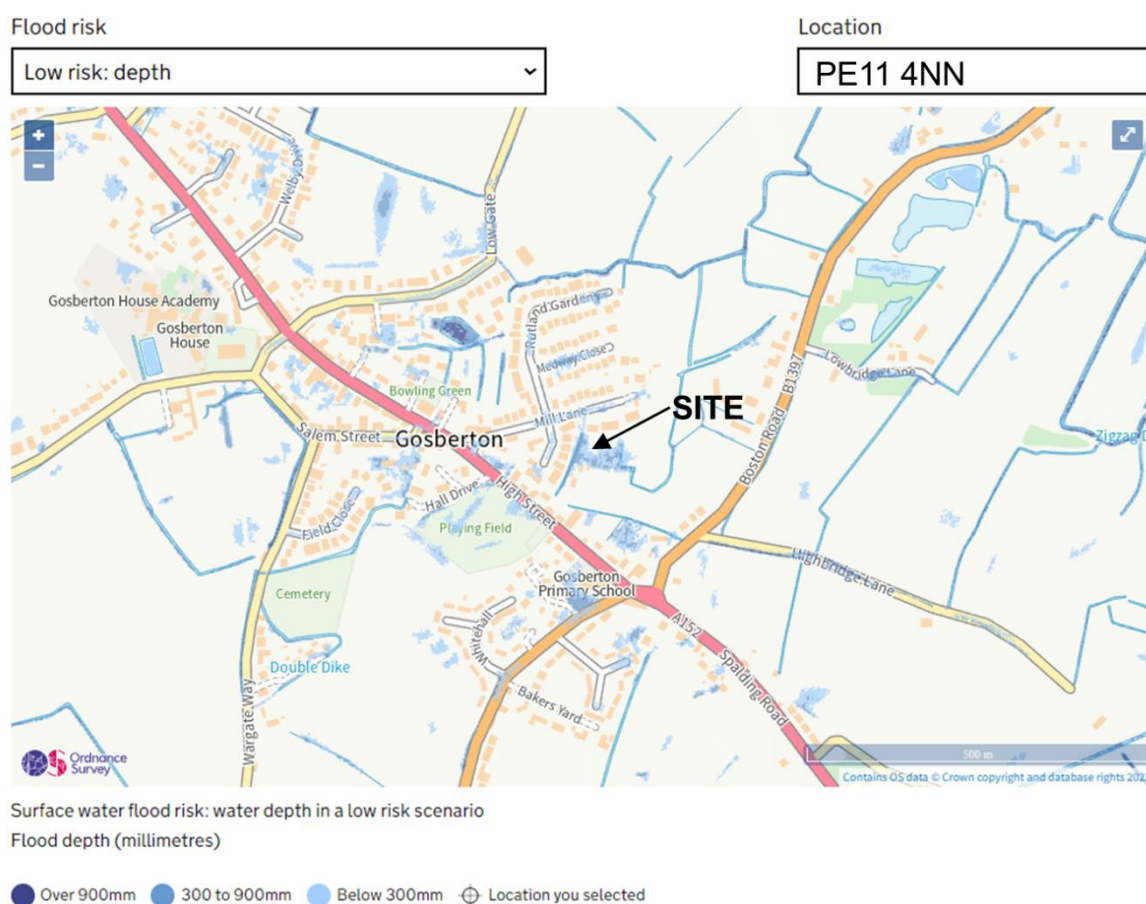

It can be seen there is a predicted risk of up to 300mm of surface water flooding on the site of the proposed building.

Existing Ground Levels

A topographical survey has been carried out and a copy of the drawing showing this survey will be submitted with the planning application. A sample of the levels measured in the survey are shown on the plan on page 14 of this report.

The existing ground levels in the area where the bungalow is proposed are between 2.39m and 2.53m ODN. The house has a finished floor level of 2.89m ODN. The road levels of Mill Lane immediately north of the house are 2.67m ODN.

The dyke on the western boundary of the site flows northwards with bed levels from 1.65m ODN at the southern end to 1.32m ODN at the northern end. The dyke is piped alongside the house as far as a manhole in the front garden. The size of the pipe is noted as 225mm at the southern end where the invert level is 1.48m ODN and 300mm diameter in the manhole where the invert level is 1.39m ODN. The water then flows easterly in a 300mm diameter pipe into an open section of dyke in front of the adjoining property.

Existing Flood Alleviation Measures

The site is within a defended flood plain, as defined in Appendix 1 of the Environment Agency's "Policy and Practice for the Protection of Flood Plains", which is considered to be passive until such time that a flood greater than the defences can withstand occurs. The likelihood of flooding occurring due to overtopping or failures of the defences is considered to be very low.

The site is located approximately 4.7 km west of the tidal section of the River Welland, which has a tidal defence bank which is maintained by the Environment Agency.

The site is located 3.6 km north of the River Glen which is maintained by the Environment Agency.

The site is located 7.7 km east of the South Forty Foot Drain which is maintained by the Environment Agency.

There are watercourses in the area that are maintained by Welland and Deepings IDB.

Potential Sources of Flooding

The potential sources of flooding to the site are:-

1. Failure or overtopping of tidal defences of the River Welland.
2. Overtopping or breach in the River Glen.
3. Flooding from watercourses maintained by Welland and Deepings IDB.
4. Flooding from overtopping of the riparian dyke on the western boundary.
5. Flooding due to excess surface water run off from the development.

1. Failure or overtopping of tidal defences

The west bank of the tidal River Welland, which is approximately 4.4 km east of the site, has at least a 1 in 200 year standard of protection. It is extremely unlikely that flood water from a breach in the west bank of the River Welland south of the outfall

sluice from the River Glen would cause flooding to the development site. The higher land and old sea banks, as well as Vernatt's Drain, would prevent flood water reaching the new A16. It is possible that flood water from a breach in the River Welland north of the outfall sluice could flow westwards and may just affect the site.

The SFRA does not predict any residual flooding in the area of Gosberton in a 1 in 200 year event in 2115.

From the information available in the SFRA the level of risk to this part of Gosberton is satisfactory for the residential development proposed.

2. Failure or overtopping of the banks of the River Glen

The SFRA gives predicted levels for the River Glen of 4.65m OD and 4.68m OD for the 1 in 100 year and 1 in 1000 year events in 2115. However the Environment Agency advise that the levels will be much higher at 4.40 and 4.90m OD for the 1 in 100 year and 1 in 1000 year events in 2115.

The levels of the earth bank on the north side of the River Glen between chainage 3.5km and 4.0 km, which is directly south of the development site are shown below:

Chainage (km)	3.5	3.6	3.7	3.8	3.9	4.0
Bank level (m OD)	4.71	4.40	4.89	4.33	4.59	5.14

The level of the earth bank directly south of the site has been estimated at 4.80m OD. And vary between 4.60m OD and 5.1m OD.


Peak water levels occur in the River Glen when the outfall into the tidal River Welland is tide locked. During this time the levels in the River Welland are higher than levels in the River Glen, even when the latter levels are very high. This closes the large timber doors at the sluices and prevents discharge from the River Glen into the River Welland for approximately 3 to 4 hours. Immediately upstream of the sluices is an area called Surfleet Reservoir where the area between the banks is much wider where excess water is stored.

If flood water flowed northwards from a breach in the north bank of the River Glen, it would be intercepted by the Risegate Eau Drain before it reached the southern side of Gosberton. Therefore even in a 1 in 1000 year event in 2115 flood water from this source is extremely unlikely to affect the proposed development site.

3. Flooding from IDB watercourses

This area on the south eastern side of Gosberton village is drained by the Welland and Deepings IDB drain called Moses Cut which is located north of Rutland Gardens north of the site.

Moses Cut flows south westwards through the Marlode Drain and discharges into the Risegate Eau. All of these drainage channels are maintained by Welland and Deepings IDB. These are shown on the map on the next page.

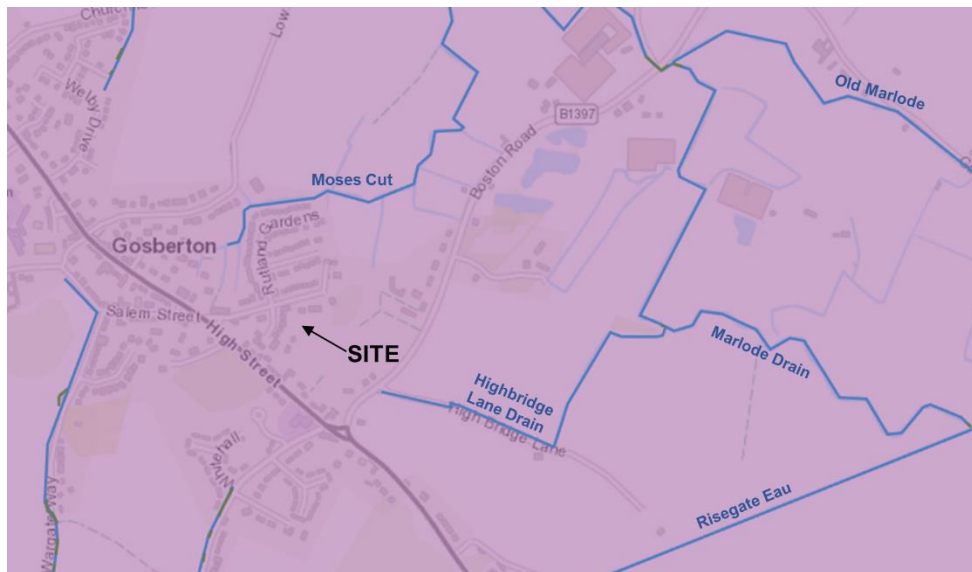

Risegate Eau provides drainage for the whole fen area of Gosberton and Quadring. The water level in Risegate Eau is controlled at the outfall near Fosdyke Bridge with an outfall sluice and a pumping station. For most situations the water is discharged into the tidal River Welland through the sluices at low tide. However in high flow situations after heavy rainfall the pumps need to be operated to control the water levels in the catchment.

The Welland and Deeping IDB drains have been designed to a 1 in 10 year standard with a freeboard of between 800mm and 1.0 metres. This generally provides a standard of at least 1 in 50 years for flooding of the lowest land. Much of the land in the catchment is below 3.00m OD and therefore even if the pumps fail to operate for a considerable time during a rainfall event the proposed house at Mill Lane would be unlikely to flood. The normal water level in the Risegate Eau is 0.00m OD at the outfall. The maximum design level in the Risegate Eau at Wargate Bridge, which is 1.5km south west of the centre of Gosberton, is 1.05m OD which is 1.9 metres below the recommended ground floor level of the proposed house.

Therefore the risk of flooding from the main IDB system can be considered to be low and adequate mitigation will be provided by ensuring that the finished ground floor levels of the proposed house is at least 300mm above the existing ground levels on the site.

4. Flooding from overtopping of the riparian dyke on the western boundary.

The dyke on the western boundary of the property flows northwards to a manhole in the front garden of "The Willows" and then flows eastwards through front gardens on the southern side of Mill Lane. It is possible that a blockage in any of the piped sections of this watercourse could lead to high water levels in the open section of the dyke alongside the property and possible flooding onto the rear garden where the bungalow will be constructed.

The maps on the Environment Agency website also indicate the risk of surface water flooding in the area alongside the dyke.

Adequate mitigation will be provided by ensuring that the finished ground floor level of the bungalow is a minimum of 300mm above the existing ground levels on the site and above the road levels in Mill Lane north of “The Willows”.

5. Flooding due to excess surface water run off from the development

Surface water from the roofs of the bungalow will be discharged into soakaways which will be designed to BRE Digest 365 and approved under Building regulations.

Adequate mitigation will be provided by ensuring that the finished ground floor levels of the bungalow is at least 300mm above the existing ground levels on the site.

Extent of known Flooding

During the preparation of this assessment, no evidence was discovered of the site being flooded in the last forty years. There are reports that after a recent heavy summer storm the water level in the dyke on the western side of the property rose as high as bank level but did not actually flood onto the lawn.

Probabilities and Trends of Flooding

The probability of this development flooding from Environment Agency main river is very low. In an extreme event any effect on this location would not be sudden and there would be time for residents to take precautionary measures to limit the impact of any flooding that may occur.

Residual Risk – Extreme Events

The residual risk from extreme events is very low on this site. There is a risk to the site is from a breach or overtopping of the tidal defences.

There is also a risk of the dyke on the western boundary overtopping and flood water flowing onto the site after an extreme storm.

The risk of either of these events happening on this site is low and the hazard from any flooding is also low.

Climate Change


The recommendations for flood depths for this flood risk assessment use information mostly taken from the South Holland DC SFRA which was last updated in 2010. The EA have issued new guidance on recommended contingency allowances for predicted sea rises, fluvial flows and rainfall intensities which from 19th February 2016 needs to be considered in this FRA. The effects of these new recommendations are considered in Appendix A of this report (pages 15 to 18). It is concluded that no extra mitigation measures are necessary to comply with the new guidance on climate change.

South East Lincs Advice Matrix

Advice can be found on the recommended mitigation required by referring to a spreadsheet on the South East Lincolnshire website. As all of the development is in flood zone 3 and there is no flood hazard reference should be made to Category G8 which shows that the advice in the matrix for this category is “No Comment”.

Conclusions

The maps in the SFRA do not predict any flooding to any part of the area around Gosberton in a 1 in 100 year fluvial event or a 1 in 200 year tidal event in 2115. The relevant part of the map is shown below.

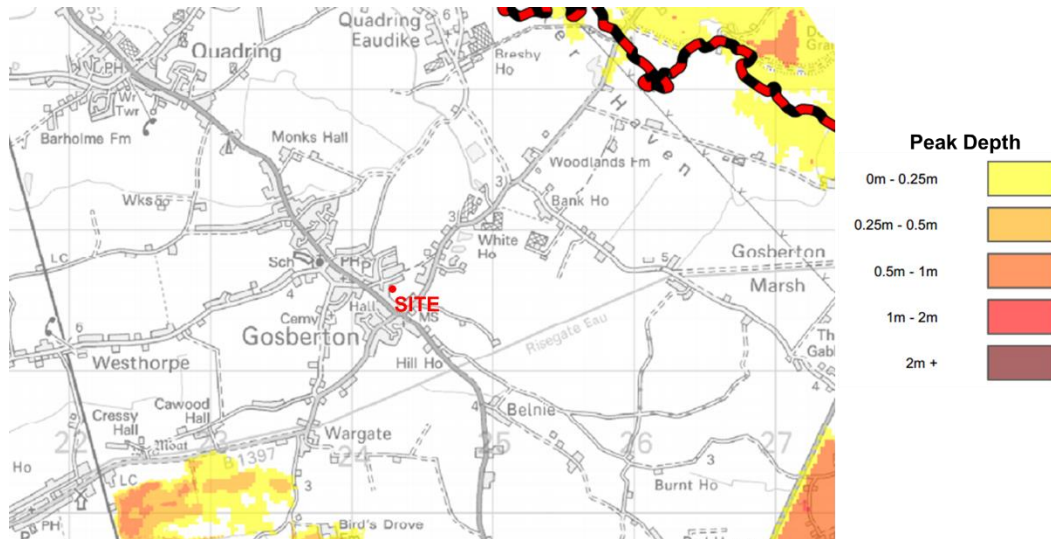

It can be seen that there is no predicted risk of flooding in a 1 in 100 year fluvial or 1 in 200 year tidal event in 2115.

The maps showing the extent of flooding in a 1 in 1000 year event in 2115 are not available for the Gosberton area. If reference is made to the 1 in 100 year and 1 in 1000 year maps in 2115 that are available in the north Surfleet area it can be seen that the extent of flooding in both events is almost identical. It can be concluded that the 1 in 100 year and 1 in 1000 year maps are almost identical in the Gosberton area and the proposed site does not have any predicted flooding in a 1 in 1000 year event in 2115.

It can also be concluded that the predicted risk of flooding from the River Welland and the River Glen will be less than 1 in 1000 years in 2115.

The risk of flooding from the South Forty Foot Drain can be considered to be adequately mitigated because the maximum flood level in this watercourse is 3.00m OD.

The risk of flooding from IDB drains can be considered low, because the minimum recommended floor level of the proposed dwellings is at least 2.0 metres above the normal level of the Risegate Eau and its tributaries.

If Risegate Eau Pumping Station were to fail then the IDB have adequate arrangements to operate pumps with alternative motive power, or to bring in mobile pumps. Welland and Deepings IDB have advised that the 1 in 100 year predicted level at this pumping station is unlikely to exceed 1.00m OD in a 1 in 100 year event. It can be assumed that the IDB will continue to monitor predicted water levels in the drain and carry out improvements to the system over the next 100 years to retain the present standard.

There is a risk of flooding from the dyke on the western boundary if a blockage were to occur in the downstream sections of this watercourse. This is a riparian watercourse and therefore is likely to be maintained to a lower standard than an IDB drain or a watercourse adopted by another authority.

The risk of flooding from surface water flowing onto the site from Mill Lane will be adequately mitigated by raising the floor level a minimum of 300mm above the existing ground level on the site.

The proposed development is not in a functional flood plain as defined by PPS 25.

Although the site is in flood zone 3, the actual risk of the site flooding from any Environment Agency or IDB watercourse is very low.

Recommendations

In any area at risk of flooding it is preferable that new dwellings should be of two story construction with all bedrooms at first floor level. This is to provide a refuge for residents if the building becomes flooded in the unlikely event of flood water from a serious failure of the bank of the River Welland or the River Glen reaching the site and ensure there is no danger to residents when they are asleep.

As there is no predicted flooding on this site in both the 1 in 200 year and the 1 in 1000 year scenario in 2115 it is considered that a single storey building (bungalow) would be satisfactory on this site.

The general recommendation in the South East Lincolnshire Matrix is that the finished floor level of a dwelling should be a minimum of 300mm above the existing ground level on the site. As there is a risk of flooding from the dyke on the western boundary it is recommended that the finished floor level of the proposed bungalow should be 2.90m ODN. This is 10mm above the level of the existing house, 230mm above the level of Mill Lane and between 400mm and 450mm above the existing ground level on the site of the bungalow.

All future owners and occupiers of the dwellings should register with the Environment Agency's Floodline Warnings Direct Service.

Rainwater from the roofs of the buildings should be discharged if possible into soakaways and these should be designed to BRE Digest 365 and approved under Building regulations.

S M HEMMINGS B Sc C Eng MICE MIWEM

stuart.hemmings@btinternet.com

22nd November 2022


LOCATION PLAN



PROPOSED PLAN OF DEVELOPMENT



PLAN SHOWING LEVELS ON THE SITE

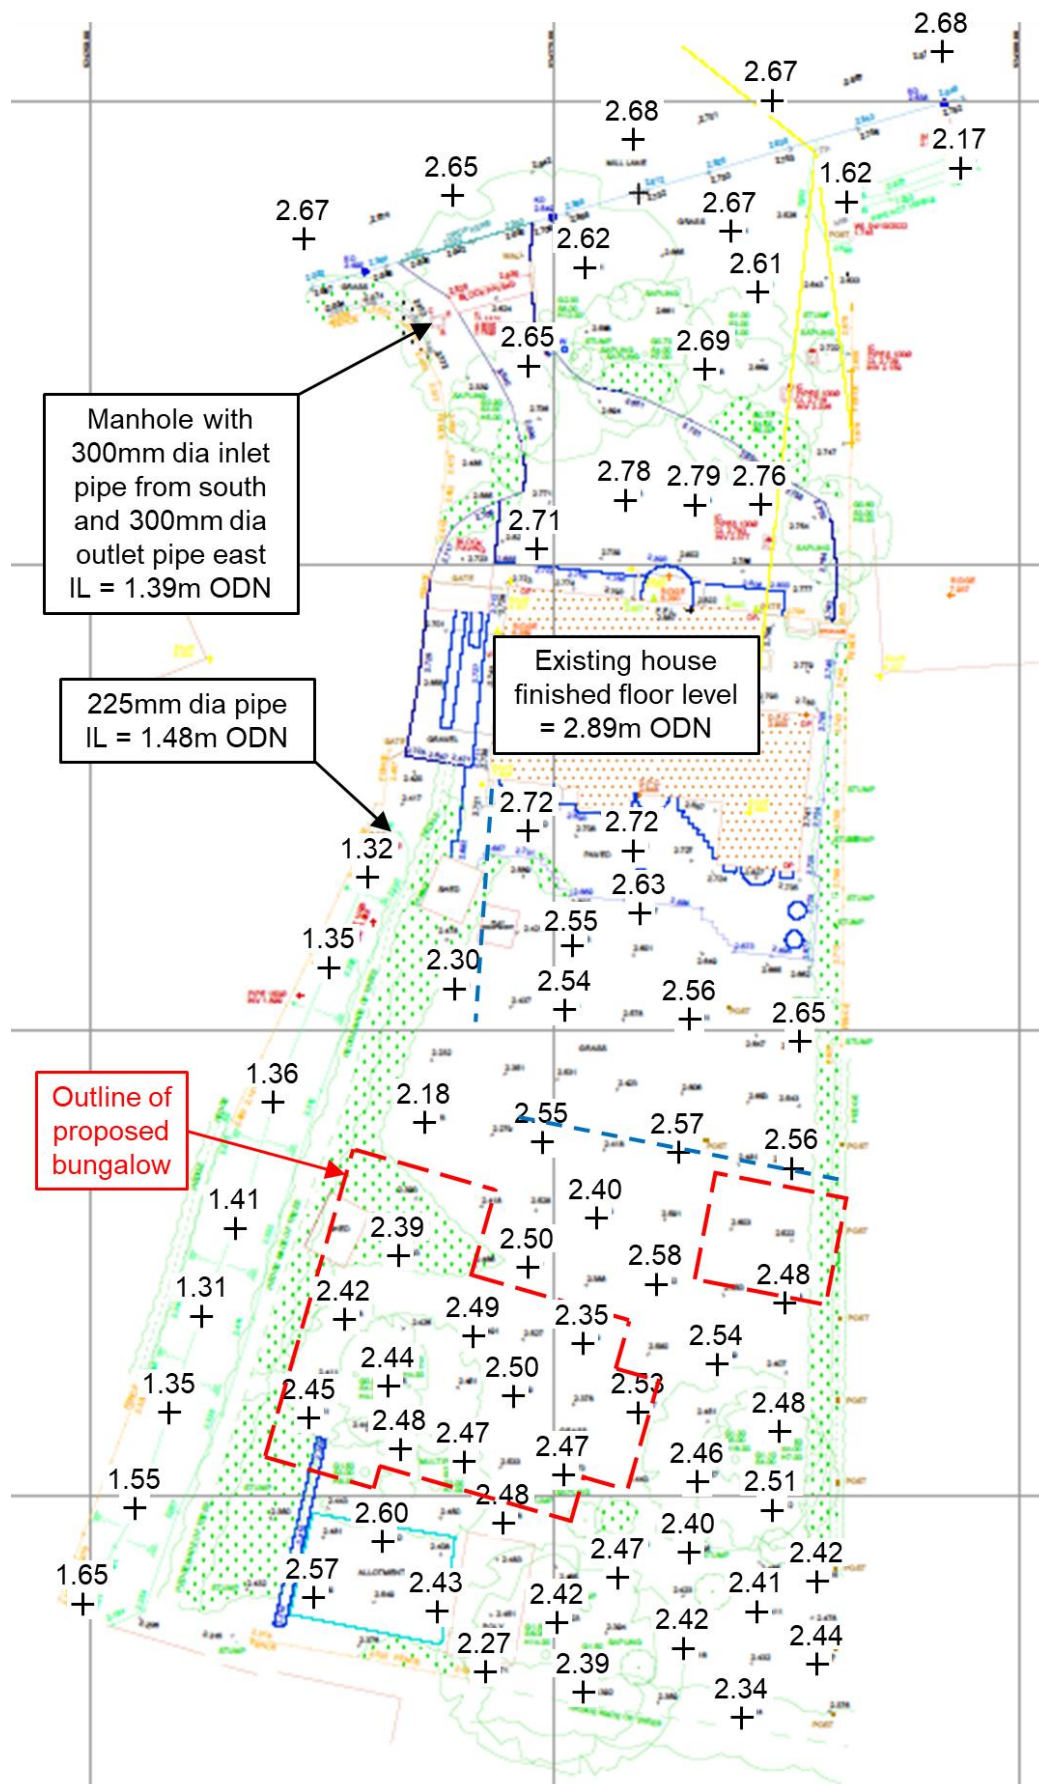

APPENDIX A CLIMATE CHANGE

The Environment Agency has issued revised guidance on climate change and have now stated that the new predictions should be considered and incorporated into all flood risk assessments produced after 19th February 2016.

Listed below are the climate change allowances in three documents:

- South Holland SFRA
- EA guidance (2013)
- Revised EA guidance

The recommendations in each document are shown below.

2010 South Holland DC SFRA

The SHDC SFRA states that the the following allowances have been made for climate change:

4.4 Climate Change

Scenarios for the years 2055 and 2115 include for climate change contingency allowances to the amount suggested by PPS25¹. These allowances are expressed in Table 2. Percentage increases are relative to the present-day.

Table 2 – Adopted Climate change contingency allowances

Parameter	Year 2055	Year 2115
Sea level rise (m)	+ 0.33	+ 1.14
Extreme wave height	+ 10%	+ 10%
Peak river flow and volume	+ 20%	+ 20%
Peak rainfall intensity	+ 20%	+30%

Where flows arise from pumping rather than natural run-off, notably in the Vernatt's Drain and for the Fenland subcatchments of the South Forty Foot Drain, peak flow rates for future eras have been taken as equal to current rates since this SFRA assumes all flood risk management measures will remain in their current state.

2013 Guidance to Planners

Guidance to planners was issued by EA in September 2013

Table 1: Recommended contingency allowances for net sea level rises (Net sea level rise (mm per year) relative to 1990)

	1990 to 2025	2025 to 2055	2055 to 2085	2085 to 2115
East of England, east midlands, London, south-east England (south of Flamborough Head)	4.0	8.5	12.0	15.0
South-west England	3.5	8.0	11.5	14.5
North-west England, north-east England (north of Flamborough Head)	2.5	7.0	10.0	13.0

Table 2: Recommended national precautionary sensitivity ranges for peak rainfall intensity, peak river flow, offshore wind speed and wave height

Parameter	1990 to 2025	2025 to 2055	2055 to 2085	2085 to 2115
Peak rainfall intensity	+5%	+10%	+20%	+30%
Peak river flow	+10%	+20%		
Offshore wind speed	+5%		+10%	
Extreme wave height	+5%		+10%	

Revised 2016 EA Guidance

Table 1 peak river flow allowances by river basin district (use 1961 to 1990 baseline)

River basin district	Allowance category	Total potential change anticipated for '2020s' (2015 to 39)	Total potential change anticipated for '2050s' (2040 to 2069)	Total potential change anticipated for '2080s' (2070 to 2115)
Anglian	Upper end	25%	35%	65%
	Higher central	15%	20%	35%
	Central	10%	15%	25%

As the development is more vulnerable, and is in flood zone 3(a) the higher central and upper end should be used to assess the range of allowances.

Table 2 peak rainfall intensity allowance in small and urban catchments (use 1961 to 1990 baseline)

Applies across all of England	Total potential change anticipated for 2010 to 2039	Total potential change anticipated for 2040 to 2059	Total potential change anticipated for 2060 to 2115
Upper end	10%	20%	40%
Central	5%	10%	20%

Table 3 sea level allowance for each epoch in millimetres (mm) per year with cumulative sea level rise for each epoch in brackets (use 1990 baseline)

Area of England	1990 to 2025	2026 to 2050	2051 to 2080	2081 to 2115	Cumulative rise 1990 to 2115 / metres (m)
East, east midlands, London, south east	4 (140 mm)	8.5 (212.5 mm)	12 (360 mm)	15 (525 mm)	1.24 m

Table 4 offshore wind speed and extreme wave height allowance (use 1990 baseline)

Applies around all the English coast	1990 to 2050	2051 to 2115
Offshore wind speed allowance	+5%	+10%
Offshore wind speed sensitivity test	+10%	+10%
Extreme wave height allowance	+5%	+10%
Extreme wave height sensitivity test	+10%	+10%

Effects on Predictions of Flood Risk in FRA

The FRA has identified three sources of flooding where the new climate change recommendations could affect the predictions of flood levels in 2115 at the development site:

- 1) Flooding from the tidal River Welland.
- 2) Flooding from the River Glen.
- 3) Flooding from IDB systems.

1) Flooding from the tidal River Welland

The contingency allowance in metres for the years 2055 and 2115 using 1990 as a baseline in the SFRA compared with the guidelines is as follows

Year	SFRA	2013 guidance	Revised 2016 guidance
2055	0.33	0.395	0.412
2115	1.14	1.205	1.24

The SFRA does not predict any residual flooding on any part of the site in a 1 in 200 year event in 2115. The risk of flooding from the tidal River Welland is extremely low due to the reasons set out on page 7 of this report.

An increase of 100mm in maximum tidal levels is only likely to increase the maximum flood depths by around 10mm at the location of the development site, and is unlikely to significantly change the predicted flood depths indicated on the maps in the SFRA.

The precaution of recommending that the proposed property should be a minimum of 300mm above existing ground level is considered to satisfactory.

2) Flooding from the River Glen

As part of the development is in flood zone 3 and is classed as more vulnerable, the upper end climate change allowance, which is 35%, should first be considered. After considering the effects of this increase the upper end allowance, which is 65%, should be considered to assess the effect of this.

The EA have been using an allowance of 20% for climate change over the past few years in their assessments and modelling of their systems. The increase to 35% will not significantly change the conclusion in the SFRA of what might happen if a breach occurred in the bank of the River Glen. If there are additional flows along this part of the River Glen it will lead to additional overtopping over lower banks rather than any significant increase in levels in the river.

The upper end allowance predicting a 65% increase in flows above the 1 in 100 year predicted flows now needs to be considered. The River Glen is an embanked watercourse between Spalding and Bourne. It is unlikely that there will be any significant increase in the water level in the River. Therefore the consequence will not be significantly different to the maps produced in the SFRA.

3) Flooding from IDB Systems

Welland and Deepings IDB, and all IDB's, are aware that climate change will affect the operations of pumping stations, sluices and drainage channels. Pumping stations and sluices only have a 30 year life and will need to be refurbished or rebuilt within this timespan. It is assumed that Welland and Deepings IDB will continue to review the modelling they have already carried out and when the Board consider refurbishments adequate arrangements will be made to incorporate the latest climate change projections in order that Board continues to provide the same standard of service as the present day.

Therefore it is considered that the mitigation proposed for the development, with the recommendation that the finished floor level should be set at a level of 2.90m ODN which is between 400mm and 450mm above the existing ground level on the site, is satisfactory.