Job Number:	J21A89
Project/Address:	Fleet Street, Holbeach
Date:	01/02/23

Schedule of External Materials


Prepared by STOAS Architects






ROOF

10 – Kingspan Quadcore Topdek Roof Panel, ref. KS1000TD; colour RAL 7016 Anthracite Grey

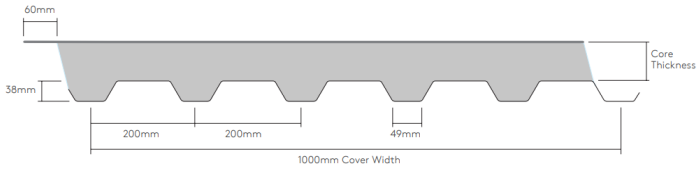


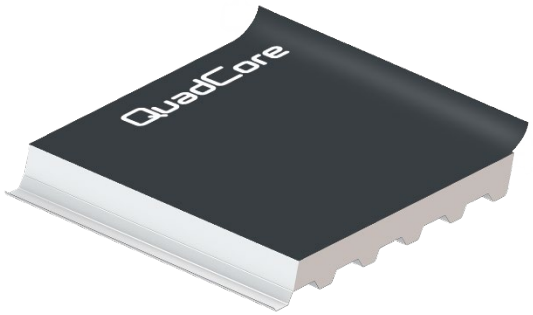



WALLS

Cladding

1 / 2 – Kingspan Quadcore KS1000RW Wall Panel; colour RAL 7016 Anthracite Grey and RAL 9006 Metallic Silver
This wall panel is a profiled, insulated cladding panel with through-fix fixing details.



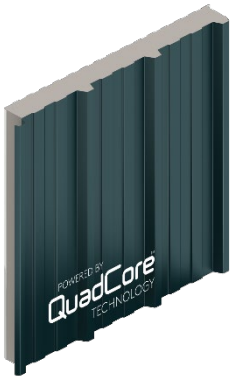

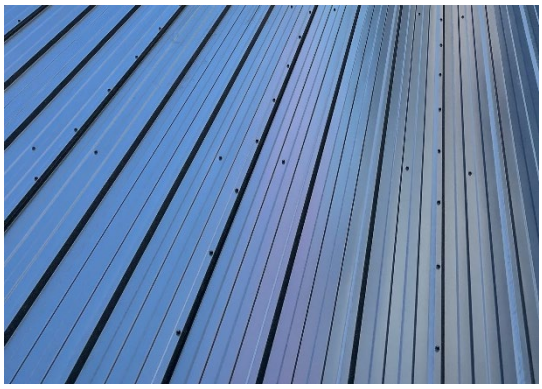

Roof and Wall Cladding Panel Colours

1 / 2 – The below colour pallet is the colour of the roof and cladding panels as listed



Colour - RAL 7016 Anthracite Grey



Colour – RAL 9006 Metallic Silver

Masonry

6 – Blockleys Black Smooth clay facing brick with black coloured mortar



Canopy Fascia

8 – Powder coated aluminium sheeting, colour RAL 7016 Anthracite Grey.
(Joints to match half grid spacing on entrance elevation and shopfront elevations).



Windows

7 – Polyester powder coated aluminium colour RAL 7016 Anthracite Grey.



Steel Escape Doors

6 – Polyester Powder coated colour RAL 7016 Anthracite Grey.



Shopfronts

3 – Polyester powder coated aluminium RAL 7016 Anthracite Grey.



Entrance

5 – Polyester powder coated aluminium RAL 7016 Anthracite Grey.



External Ground finishes

Main car park to be finished in Tarmac.



Loading Bay ramp and Refrigeration Plant area to be finished in brushed concrete.



External boundary treatments

Acoustic Timber Fence.



Close Board Timber Fence.



Timber Knee Rail.

