




SIDE ELEVATION.

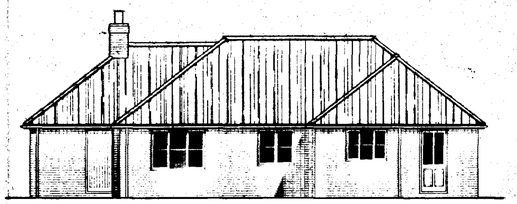


NORTH ELEVATION.

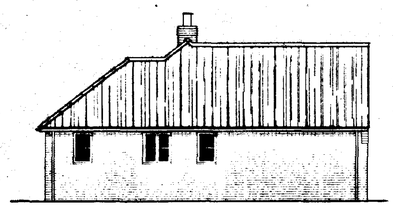

SIDE ELEVATION.

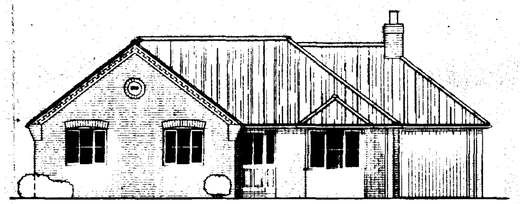


SOUTH ELEVATION.

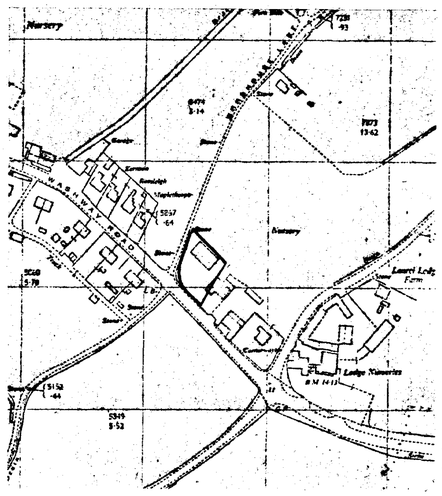


LOCATION PLAN 1:2500


NORTH

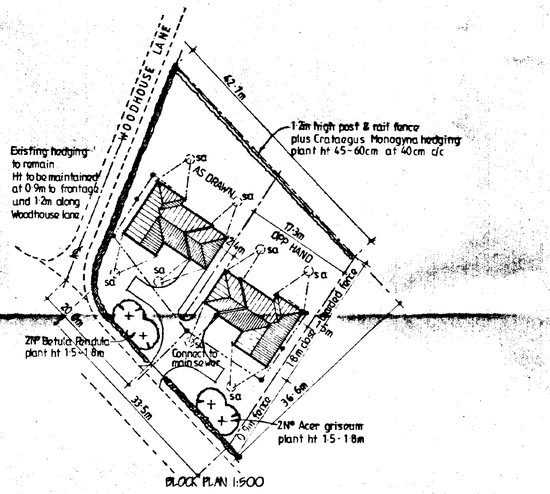

BLOCK PLAN 1:500

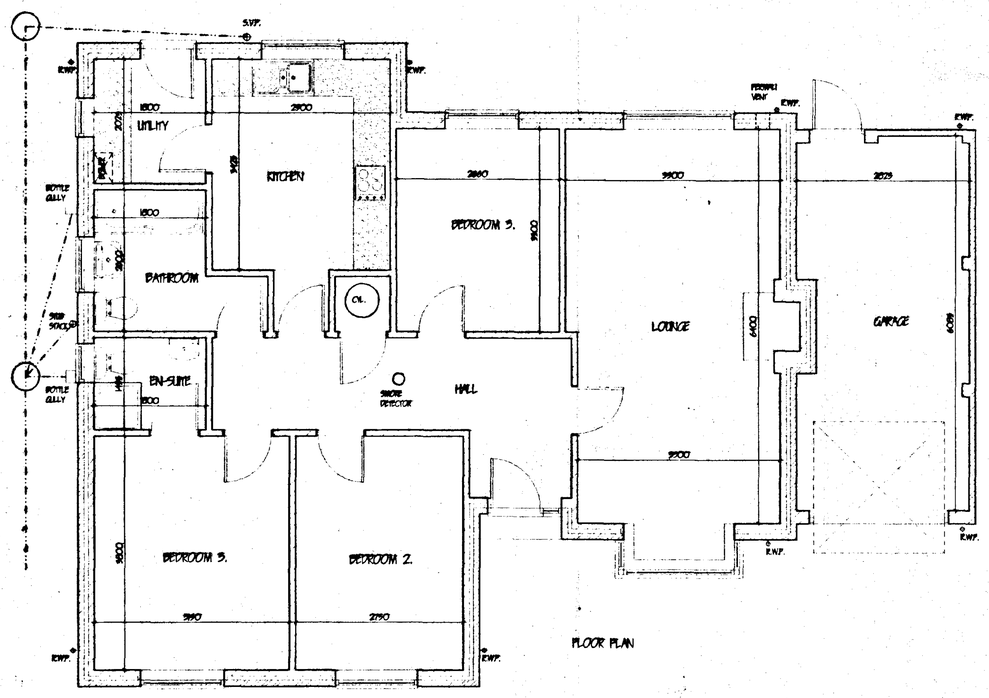

FLOOR PLAN

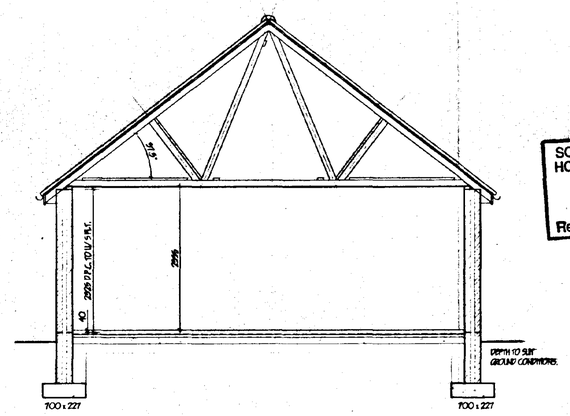

SECTION

GLAZING.
Double glaze properly throughout (minimum 6mm air gap to all units) excluding garage. All glazing between f.f.l. and 800mm high and between f.f.l. and 1500mm high in doors and side lights to be safety glass to B.S. 6206. All windows / doors to be draught sealed.

VENTILATION.
All windows to have opening lights to give the equivalent of 1/20th the floor area. Provide background ventilation to habitable rooms min. 8000mm sq permanent free air ventilation per room. To all other rooms provide min 4000 sq. All following rooms to have in addition to above Wall / Window mounted mechanical extractor fan. Kitchen to extract min. 60 litres per second. Utility rooms to extract min. 30 litres per second. Bathrooms to extract min. 15 litres per second which may be operated intermittently. W.C. to extract min. 6 litres per second with 15 minute overrun.

HOT WATER AND SPACE HEATING.
Provide Oil fired condensing boiler with fan assisted balanced flue. Provide durable wire guard to flue externally. Provide timer switch and suitable zone thermostats to dwelling, fit thermostatic control valves to all radiators. Hot water system to be thermostatically controlled with timer switch and to be vented. All hot water storage tanks and pipework to be insulated to B.R. LI. part 3.

SMOKE DETECTORS.
Provide mains operated self-contained smoke alarms to B.S. 5446: pt.1. in positions shown on plan.

GENERAL
All electrical installations to be in accordance with the latest I.E.E. Regulations.

CEILINGS.
200mm glassfibre insulation total thickness. 100mm between joists & 100mm over joists. 12.7mm Gyproc plasterboard 3mm skim finish. Provide min. 38 x 38 noggins to all plasterboard edges. All joints to be taped and filled. Garage ceiling to be 12.7mm Gyproc Fireline board and Artex. Provide access trap to roof space: opening to be lined with 25 x 25 planted stops: Access panel to be 12mm ply with layer of 12.7mm Fireline board fixed to face. 100mm Jablite to top surface. Provide slide bolt fastenings & draught seal all round

FLUE CONSTRUCTION.
225mm internal diameter clay flue liners to B.S. 1181: 1971 and to be laid socket uppermost: 100 face brickwork surround to flue and to extend min. 600mm above ridge line and terminate in corbelled oak brickwork and clay pot: Weak mix. conc. infill around flue as work proceeds: Trim roof around flue, no timber within 40mm of flue: At roof / flue intersection provide code 4 lead flashing and 2 course engineering bricks.

OPEN FIRE.
To be capable of burning smokeless fuel. Hearth to be constructed of non combustible material min. 125mm thick: To project from face of wall by min. 500mm and pass reveals by min. 150mm: All in accordance with approved document part J. (part C 1-25). Appliance to be in accordance with building regulations. Provide louvered permanent vent. in ext. wall to give min. 50% of the appliance throat opening area positioned 150 above floor level. Provide 65 x 100 prestressed conc. lintel over chimney opening.

LINTELS.
All lintels to be manufactured by Messrs. I.G. and to be installed in accordance with makers' instructions, and to have min. end bearing of 150mm and at external positions to have cavity tray D.P.C. to CP. 121: Internal lintels to be I.G. 100 Box type. Lintels in quirazer to be underlined with 12.7 Fireline board or receive 12mm render and skim. Provide Perp end weep holes and stopends to cavity tray

FOUL DRAINAGE
Inspection chamber construction to be "Osma" and installed in accordance with makers' instructions with the internal diameter related to the depth in accordance with B.S. 8501:1985. Foul drainage pipes to be 110mm dia. UPVC, to B.S. 4660:1989 flexibly jointed and laid to gradient instructions to a fall of 1:70 bed and surround with 100mm pea gravel: Where pipes pass under floors encase in 150mm pea gravel: Where pipes pass under drives surround in 150mm concrete with flexel joints to correspond with joints in pipework. Provide 65 x 100 prestressed concrete lintel bridging where pipes pass through walls, allow 50mm gap around pipe, opening sealed both sides of wall with ridged sheet material: Soil and vent pipes to be 110mm dia. PVC to B.S. 4514: 1983 and to extend 900mm above window head terminating with PVC balloon. Waste pipes to be 40mm dia. PVC to B.S. 5943: 1979 complete with rodding eyes at every change of direction: Bath, basins and sink to have 75 deep seal traps: Shower to be raised on 150mm plinth with access plate to anti-syphon trap and 50mm waste.

SURFACE WATER DRAINAGE.
115mm dia. half round rainwater gutters to 65mm dia. rainwater pipes: 110mm dia. underground pipes flexibly jointed to a fall of 1:70 pipes bedded and surrounded in pea gravel and discharge to 1.2m dia. soakaway min. 5.0m to edge from dwelling.

LIMITATIONS.
This drawing is limited in the amount of information contained and does not purport to contain a full specification of the works. It is solely for the purpose of obtaining Planning / Building Regulation approval.
The drawing must not be used as a contract document alone.
All dimensions shall be taken from site from actual work. Under no circumstances shall measurements be scaled from this drawing for construction or ordering purposes.
All given dimensions shall be checked by the Builder / Contractor and will be his responsibility from commencement of site works.
The works will not be supervised or inspected on site by C.A.D. or any representative thereof. It is the client or their appointed agents responsibility to control workmanship, substitution of materials, adherance to specification, variations to contract etc.

COPYRIGHT RESERVED.
Copies of this drawing must be made only with the written permission of Cooper Architectural Design.

STANDARDS.
All materials to be new unless otherwise stated and all components and materials etc. to be used fitted and installed etc. in strict accordance with manufacturers instruction and relevant Code of Practice.
Materials shall conform to appropriate British Standard Specification or BDA Certificate or European Code equivalent.

HEALTH & SAFETY.
The Employer / Client shall ensure that the selected contractor is conversant with and adopts all measures necessary to achieve compliance with Health & Safety legislation for Building Sites and Work Places.
The Employer / Client is advised that should the works need to comply with the Construction Design and Management Regulations an independent Planning Supervisor will be required.

SCOPE OF THE WORKS.
The works shall comprise of all that is shown on the drawing and details. Work that may not be specifically shown but may be reasonably inferred as necessary to carry out the works shall be deemed to be included.

DETERMINED PLAN

revision	date	init.	revision details.

COOPER ARCHITECTURAL DESIGN
BRONAVON, HOCKLESGATE, FLEET, SPALDING, LINC'S. PE12 6LF
Tel/Fax : 01406 423782
Mobile : 0410 290852

SOUTH HOLLAND DC HOUSING & PLANNING 10 MAR 1999 Ref: 0234/99

Client. J. FREEMAN

Project. RESIDENTIAL DEVELOPMENT 2No. 3 BEDROOMED BUNGALOWS WASHWAY ROAD, HOLBEACH, SPALDING, LINC'S.

Drawing. FLOOR PLAN / SECTION / ELEVATIONS

Scale	1:50 1:100	Drawing No.	9840:1
Date.	MARCH '99.	Drawn.	J.C.