




Key:	
	Existing Foul Water
	Existing Surface Water
	Proposed Foul Water
	Proposed Foul Water Manhole
	Proposed Surface Water
	Proposed Surface Water Manhole
	Proposed Surface Water Gully
	Existing Site Level
	Proposed Site Level
	Proposed High Point
	Proposed Low Point

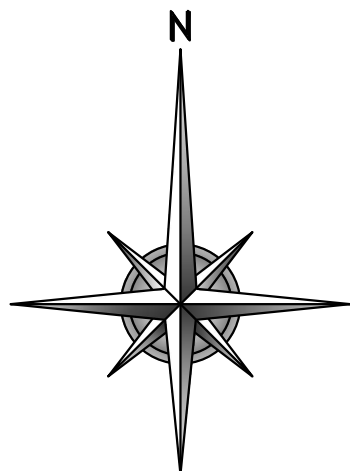

"The specification in all respects shall be in accordance with the current Lincolnshire Development Road and Sustainable Drainage Design Guide" and "Development Road and Sustainable Drainage Specification and Construction" publications in force in the county at the time of construction.

The minimum longitudinal fall for highways, without channel blocks shall be 1 in 150, and with channel blocks 1 in 250 (see Clause 10.1).

In addition, ensure that the first section of any side road falls away from the road to which it is connecting. If general topography requires it to rise, this change of direction should take place after the first set of gullies. This is to ensure a false channel with associated drainage problems is not created in the bellmouth of junctions.

"General deterioration of the existing highway/footway/verges created through construction of the new Section 38 Development will be reinstated to the current Development Road Specification at the developers' own cost at the agreement of the inspecting Highway and Flood Authority Officer."

"No private surface water shall discharge onto the adaptable highway."

"No private, structural features shall overhang the adaptable highway."

"No private retaining walls exceeding 1.37m shall be within 3.66m of the highway boundary."

- CDM (Construction Design and Management Regulations 2007):
- If you do not fully understand the risks involved during the construction of the items indicated on this drawing ask your manager, health & safety advisor or a member of the design team before proceeding.
 - Existing services may exist on-site. The contractor shall liaise with all relevant service companies and arrange for all services to be located, marked and protected.
 - Drainage works may involve deep excavations and/or heavy plant/materials.
 - The contractor shall read and understand the Ground Investigation Report and be aware of and potential variations in soil conditions over the site.
 - The potential for danger to the general public and site personnel exists from works in the public highway. The contractor shall liaise with the highway authority (Lincolnshire County Council) and ensure safe method of working is maintained at all times.
 - Existing drainage pipes may be asbestos cement or fibre reinforced pipes, or concrete pipes containing asbestos fibre. Contractor to ensure competent staff adequately trained are engaged in the works, and disposal of any affected material is undertaken in line with current legislation and good practice guidelines.
 - The contractor is to be aware that overhead cables may cross the site.
 - The contractor is to be aware that works may involve working adjacent to or in existing watercourses.
 - Works may involve working in close proximity to an existing water main. The contractor is to ensure that this is fully located and protected during the works.

Q	29.03.18	Plots 1-3 Updated.
P	27.10.17	New-Existing Surface Water Connection Amended.
N	11.10.17	Surface Water Details Updated Local To Site Entrance.
M	09.08.17	Drainage Details Amended Local To S02 & S03.
L	19.07.17	Drawing Updated To LCC Comments Dated 05/07
K	24.05.17	Drawing Generally Developed.
J	15.09.16	Foul Drainage Layout Amended.
H	17.06.16	Plot 12 FFL Amended.
G	04.05.16	Plot 12 FFL Amended & Drawing Updated To Suit
F	09.03.16	Title Block Amendment.
E	09.03.16	Surfacing Updated Local To Plot 12.
D	08.03.16	Surfacing Updated & Plot Drainage Modified.
C	07.03.16	Drawing Generally Developed.
B	12.02.16	Drawing Generally Developed.
A	16.09.15	Drawing Generally Developed.

Rev	Date	Remarks
FOR INFORMATION		
Status		
Project		
Residential Development to Land Off Station Street, Holbeach, Lincs.		
For D. Brown Builders		
Title		
Proposed Drainage Layout		
Date	Jul. '15	Scale 1:200 @A1
Drawn	MP	Checked SRC
Design	SRC	File Name 24415-11
DRG No. 24415/11		Rev Q