
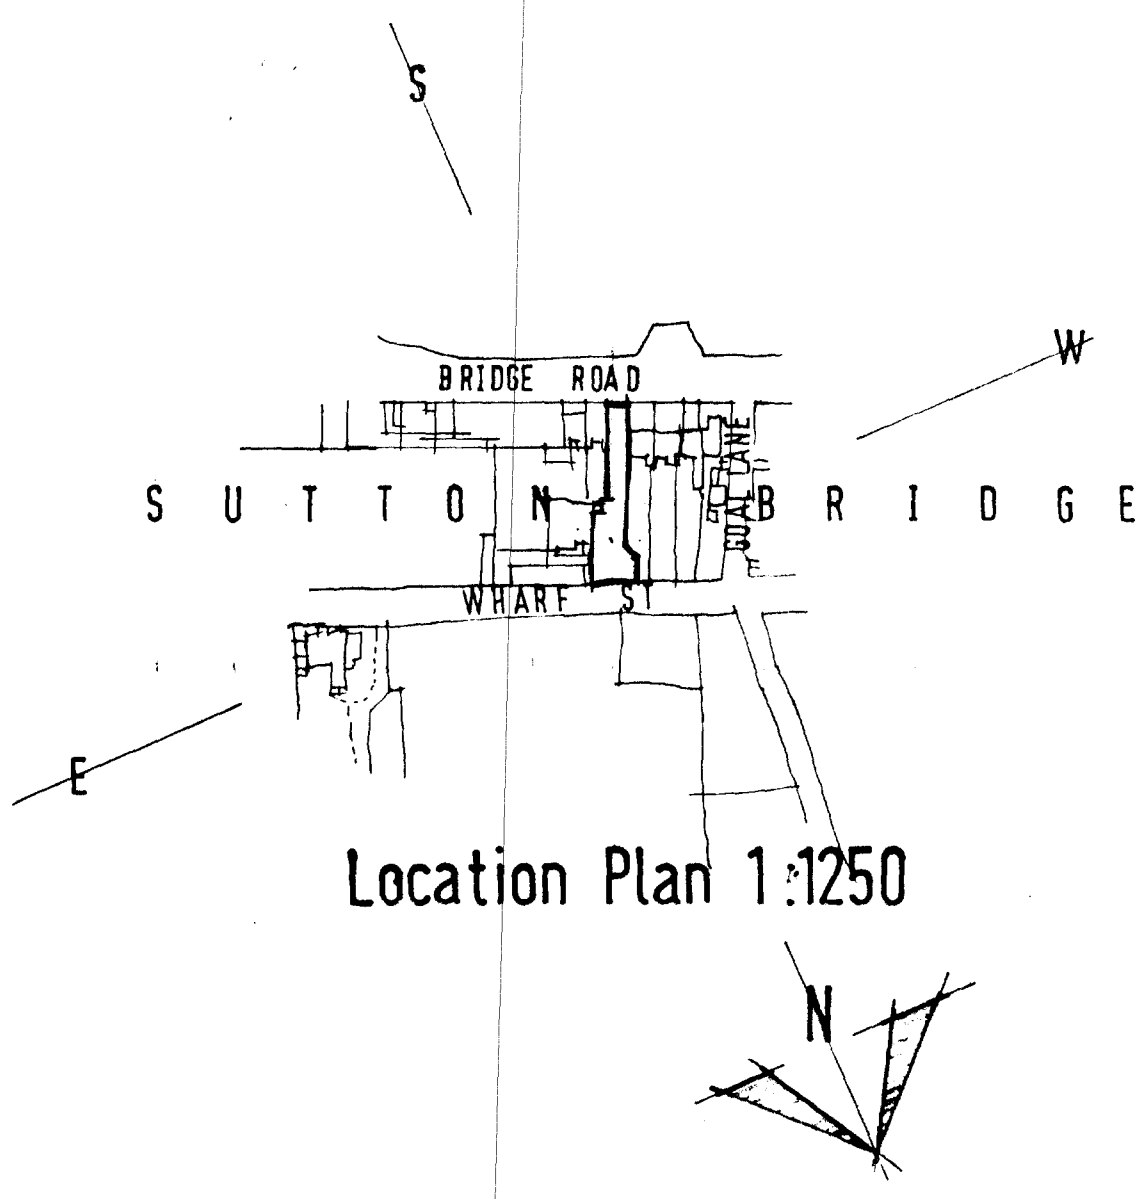


Location Plan 1:1250

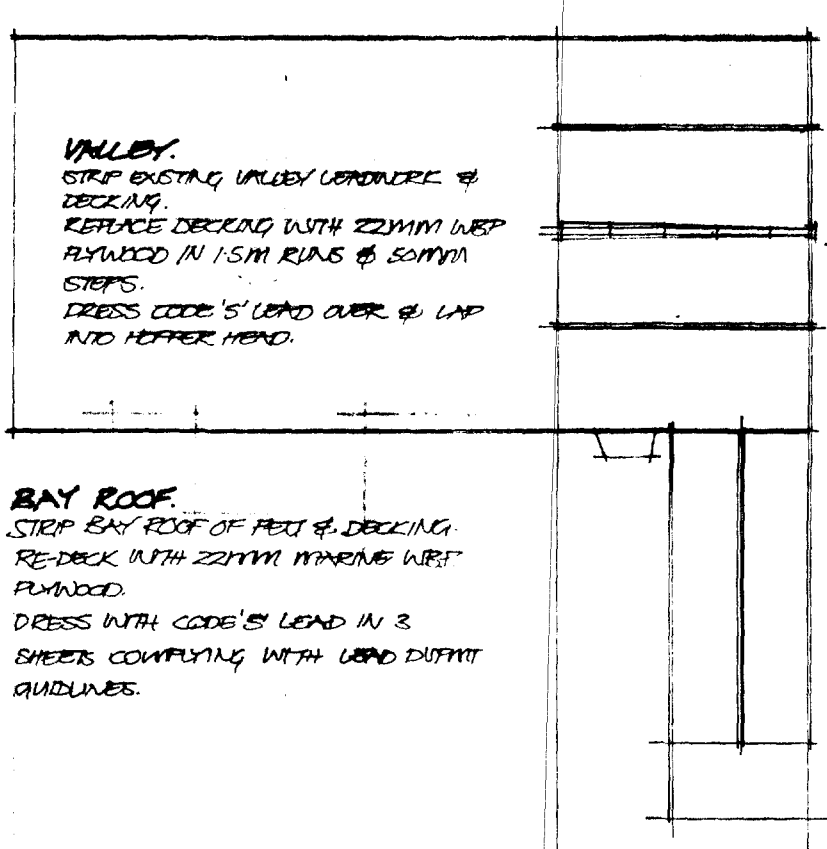

VALLEY.
STRIP EXISTING VALLEY LEADWORK & DECKING.
REPLACE DECKING WITH 22MM WBP PLYWOOD IN 1:5M RUNS & 50MM STEPS.
DRESS CODE 'S' LEAD OVER & LAP INTO HOPPER HEAD.

BAY ROOF.
STRIP BAY ROOF OF FELT & DECKING.
RE-DECK WITH 22MM MARINE WBP PLYWOOD.
DRESS WITH CODE 'S' LEAD IN 3 SHEETS COMPLYING WITH LEAD DUTY GUIDLINES.

RE-ROOFING.
CAREFULLY STRIP EXISTING SLATES & BATTENS. REFELT, BATTEN & SLATE WITH EXISTING SLATES ALLOWING FOR 30% REPLACEMENT. POINT-UP VERGES, FLASH STACKS.

HOPPER-HEAD.
BUILD-IN CAST-IRON HOPPER HEAD SCREW MOUNTED TO GABLE BRICKWORK.
RUN CAST-IRON DOWN PIPE INTO EXISTING DRAIN RUN AT FOOT OF EXTERNAL WALL.
REPOINT BRICKWORK IMMEDIATELY BEHIND & ADJACENT DOWN PIPE PRIOR TO FIXING.

RWP & DOWNPIPES.
REMOVE ALL PLASTIC GUTTERING & DOWN-PIPES FROM BUILDING.
FIX BLACK CAST-IRON GUTTERING & DOWN-PIPES TO EAVES & WALLS USING EXISTING DRAWS.

No. 68

0548/96 SUPERSEDED

MR. P. RAHAL. 68 Bridge Road, Sutton Bridge, Spalding, Lincs.	J HARRALL (Dip-Arch) 2 Post Office Lane, Wisbech, Cambs. PE131HG. Tel: (01945) 476800	MAY'96 | 1:1250 1:250 230/01