



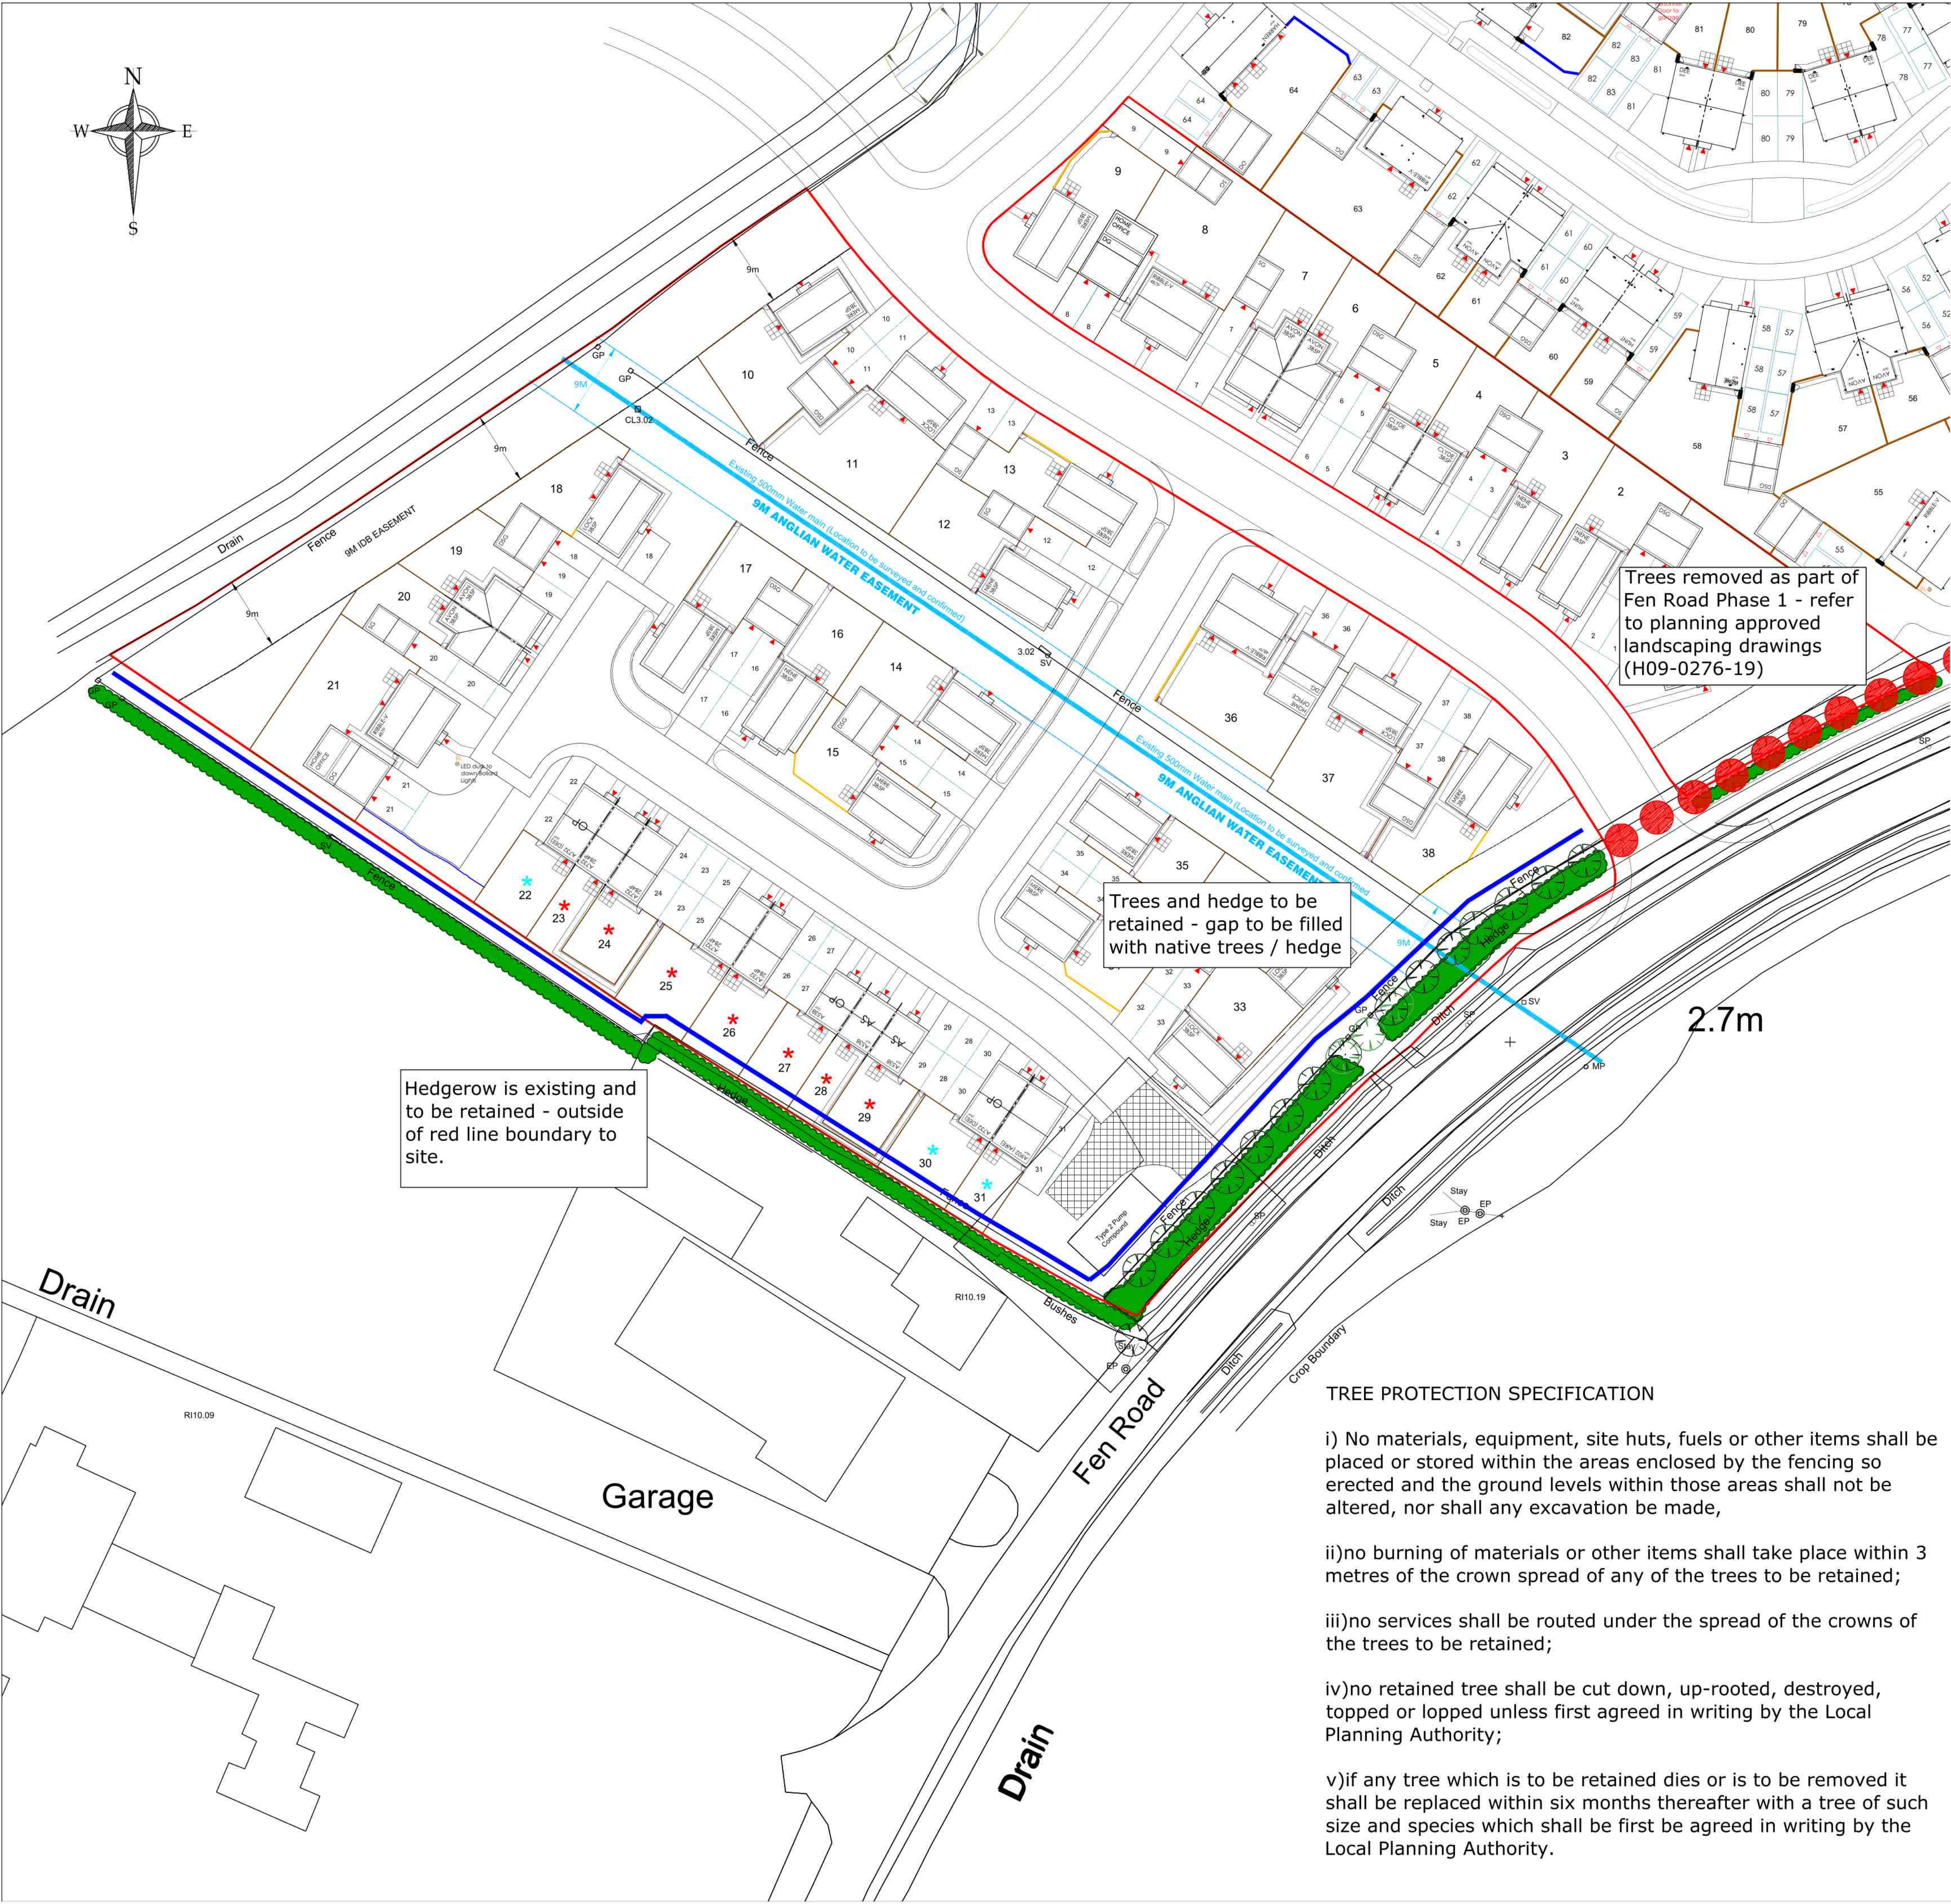

- Extent of Canopy
- Extent of Canopy - Groups
- Trees to be Removed

Barrier to Fig 2 BS5837: 2012

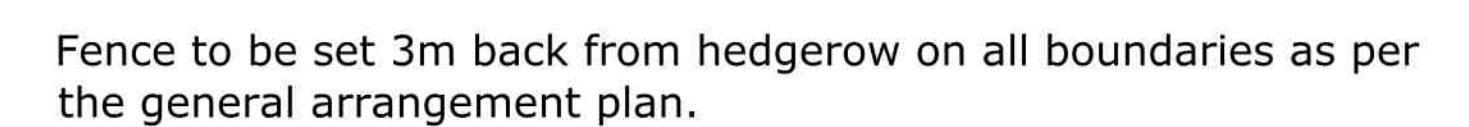

- i) No materials, equipment, site huts, fuels or other items shall be placed or stored within the areas enclosed by the fencing so erected and the ground levels within those areas shall not be altered, nor shall any excavation be made,
- ii) no burning of materials or other items shall take place within 3 metres of the crown spread of any of the trees to be retained;
- iii) no services shall be routed under the spread of the crowns of the trees to be retained;
- iv) no retained tree shall be cut down, up-rooted, destroyed, topped or lopped unless first agreed in writing by the Local Planning Authority;
- v) if any tree which is to be retained dies or is to be removed it shall be replaced within six months thereafter with a tree of such size and species which shall be first be agreed in writing by the Local Planning Authority.

 **ASHWOOD** HOMES
1 Goodison Road, Lincs Gateway Business Park,
Spalding, Lincs, PE12 6FY T: 01406 490590

PROJECT:	Proposed Residential Development at Fen Road, Phase 2		
DRAWING:	Tree Protection Plan		
SCALE:	1:500@A1	DRAWN:	GP
DATE:	MAY.2022	REVISION:	-
DRAWING No:	127-TP-01		