

|     |                                                                               |          |       |         |
|-----|-------------------------------------------------------------------------------|----------|-------|---------|
| N   | Speed limit signs added                                                       | 12.05.25 | AG    | AG      |
| M   | Removed old house references                                                  | 24.04.25 | MS    | AG      |
| L   | Amended swale and driveway crossing for plots 175-176 to suit client comments | 11.04.25 | DCA   | AG      |
| K   | Filter drain labels added                                                     | 26.11.24 | AG    | AG      |
| J   | Updated drawing status to 'For Construction'                                  | 14.11.24 | TA    | NK      |
| I   | Tactile paving added at footpath link, Road 1, ch. 17m                        | 11.09.24 | AG    | AG      |
| H   | Revised to suit S38 comments                                                  | 02.08.24 | AG    | AG      |
| G   | Temporary site access amended                                                 | 23.07.24 | AG    | AG      |
| Rev | Description                                                                   | Date     | Drawn | Checked |

Drawing Approval Status:-

☒ Section 104 ☒ Section 38 ☐ Section 278

FOR CONSTRUCTION



**Wormald Burrows**  
Civil Engineering Consultants

12a - 18a Hitchin Street, Biggleswade, SG18 8AX  
Tel: (01767) 317244 Web: www.wormburp.com  
Email: engineer@wormburp.com

Project:

Damgate, Holbeach

Drawing Description:

Phase 1  
Section 38 Agreement

Client:



Seagate Homes  
Pudding Lane  
Pinchbeck, Spalding  
Lincolnshire  
PE11 3TJ

Drawing Number:

E4237/370/N

Client Reference:

Scale:

1:500 @ A1  
1:1000 @ A3

Designed By:

AG

Date:

19.02.24

Drawn By:

MS

Date:

19.02.24

Checked By:

AG

Date:

19.02.04




Certified by Afnor UK

©This drawing is Copyright, Wormald Burrows Partnership Limited 2024.

Adoptable Drainage Legend

- Existing Foul Water Sewer
- Existing Surface Water Sewer
- Proposed Adoptable Foul Water Sewer (S104)
- Proposed Adoptable Surface Water Sewer (S104)
- Proposed Filter Drain (S104)
- Proposed Trapped Gully with 150mm connection (S38)
- Proposed Stub Connection (Private)
- Proposed Headwall (Management Company)
- Proposed Sewer Easement (S104)
- Proposed Permeable Paved Driveways (Private)
- Proposed Highways Easement (S38)

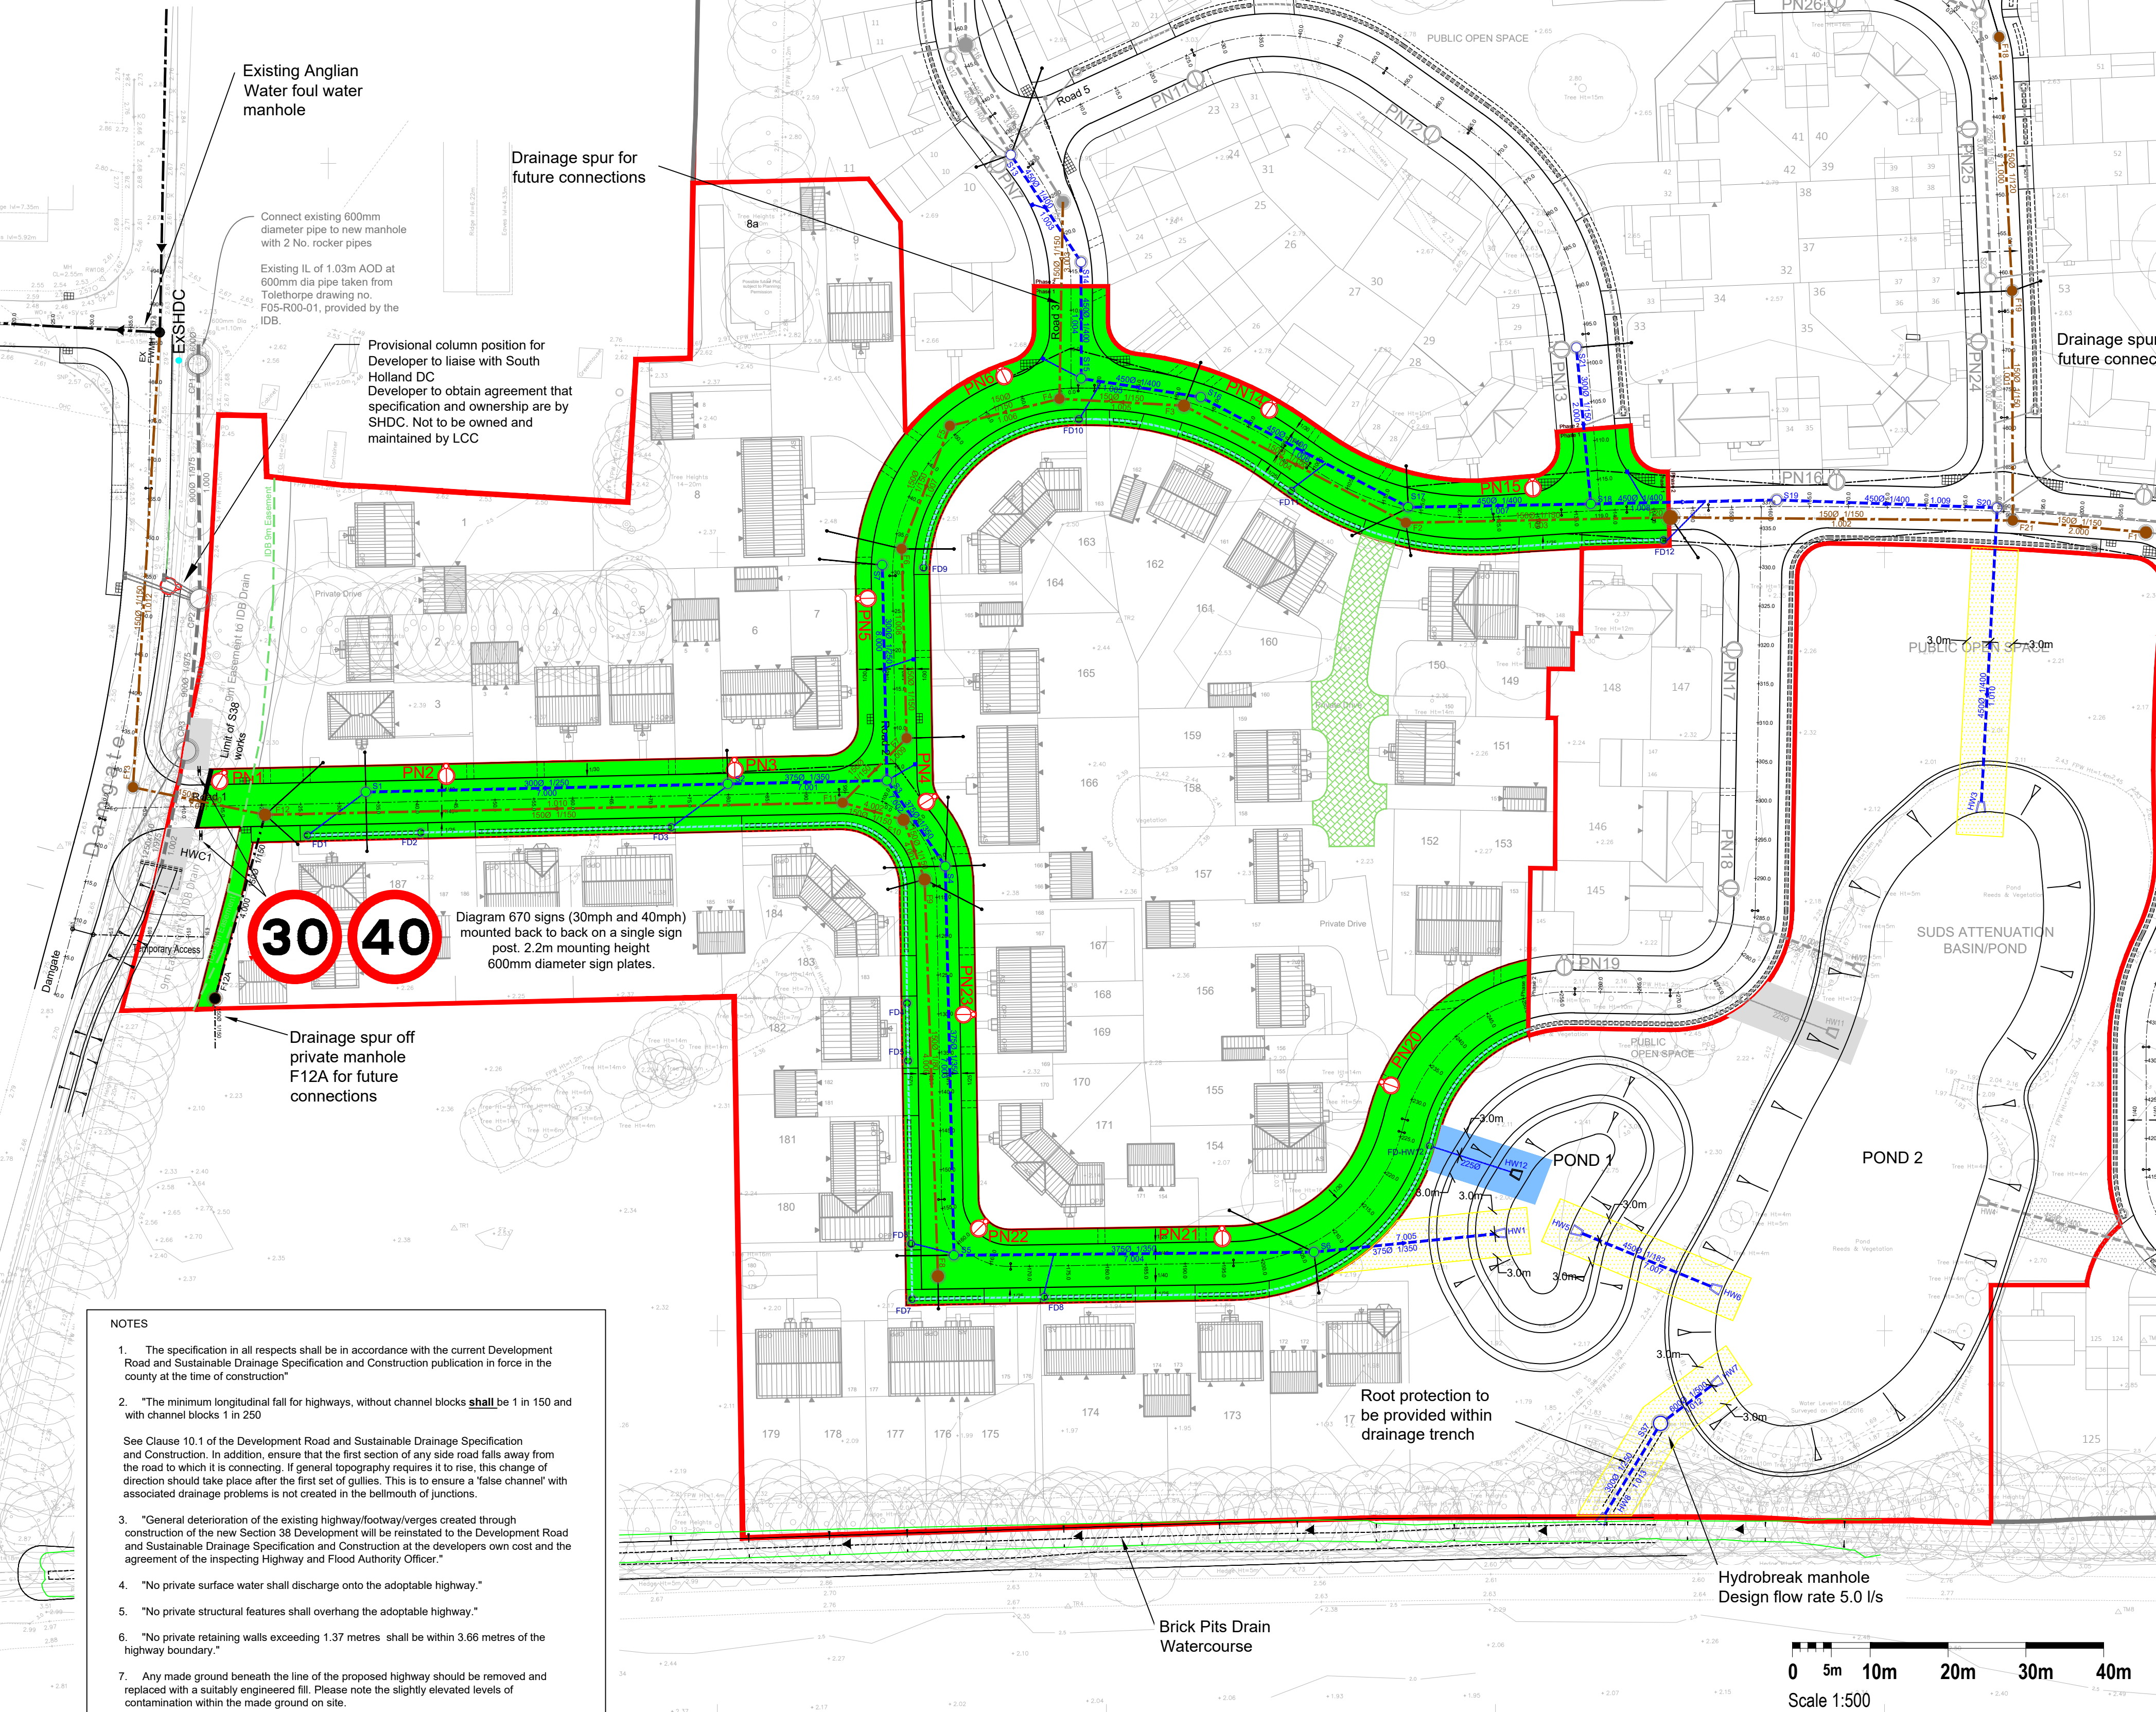

Street Lighting Key

- Proposed 6 metre galvanised T/S lighting column c/w column root protection to G1a (LCC) spec. Column to have vertically mounted TRT Aspect Eco 1 12 LED WW (3000K) Constant Light Output (CLO) General Road 2 (GR2) lens Powerset lantern set to 13W output. Lantern to have LCC Aggressive Dim Regime overridden by internal wiring link. Lantern to have 7-pin NEMA socket c/w Westrie 8480 35/18 lux Part Night (OFF: 0000-0600) photocell. Lantern inclination to be 0°.

S38 Street Lighting Notes

- Column foundations to be as per SD/14/2A
- All columns to be provided with Distribution Network Operator (D.N.O.) Services and Termination Type A to LCC Standard Detail SD/14/4A unless otherwise specified. DNO Cutouts to be fitted with 16Amp BS88 Fuse Link. Double Pole Isolator to be fitted with BS 88 Fuse Link to L.C.C. Appendix 14/4.
- Columns to be installed with doors at an angle to ensure operatives working on the column are facing oncoming traffic, unless otherwise agreed with LCC.
- Column setbacks shall comply with Table 2 Section 4.3.3.3 of BS 5489-1:2013.
- Columns shall not be installed within Drop Kerb areas and shall have a minimum clearance of 1.5m from Drives/Accesses.
- It is preferred that all Street Lighting works are undertaken by L.C.C Approved Contractors.
- Lanterns to be cleaned (during maintenance period) prior to adoption as detailed in S38 Agreement.
- Developer to liaise with Distribution Network Operator (D.N.O.) with regards to connections and disconnections of columns and appropriate black ducting. Where an independent D.N.O. (I.D.N.O.) has been used the cutout must be clearly and indelibly marked with the I.D.N.O. name and contact number.
- It is the Developers responsibility to inform property owners of part night street lighting switching where applicable.
- All private cabling shall have correct core colour identification as detailed in BS7671. Steeving of conductors is not permitted.
- Due to ongoing technical innovations within the industry, if the street lighting equipment is to be ordered in excess of three years after the drawing approval date, the Authority reserves the right to upgrade the equipment specification.
- Lighting has been designed to comply with BS5489-1:2013 Lighting Class P5.

Reproduced from Ordnance Survey digital map data ©Crown copyright 2024. All rights reserved. Licence number 0100031673

Notes

- The Contractor is responsible at all times for carrying out their work strictly in accordance with the Health and Safety at Work Act 1974 and the CDM Regulations 2015. The Contractor shall be deemed to have allowed for full compliance with the same within their price.
- The Contractor is responsible for checking all highway and drainage tie-in work with existing for line and level before commencing work. Any discrepancies or errors shall be reported to the engineer in writing immediately.
- All accommodation works necessary to establish a satisfactory link between existing and new work will have been allowed for in the Contractors price.
- It is the responsibility of the Contractor to locate any service apparatus in the vicinity of the works and he will be deemed to have allowed for all hand digging and locating of service apparatus in their price. The Developer and Engineer will accept no claims whatsoever in respect of any loss or damage caused in respect of such apparatus, however caused.
- All materials for use in the contract are to be BSI kitemarked.
- All concrete and mortar that is to be buried shall be sulphate resisting unless soil and groundwater tests prove that no sulphates are present.
- The Contractor is responsible for arranging a meeting with the Water Authority and Highway Authority Clerks of works to ascertain any variations that are relevant to their development prior to work commencing.
- The Contractor is responsible for ensuring that all works are to the satisfaction of the highway authority engineer and will have included for any necessary testing in their price.
- The Contractor is to liaise with the Highway Authority Engineer, affording them reasonable notice to inspect the works during construction.
- The Contractor is to ensure that any traffic management required to undertake the works is approved by the Highway Authority prior to these works commencing.
- The Contractor is to comply with the New Roads and Streetworks Act 1991 for all works in the public highway.
- All adoptable highway work shall be constructed in accordance with the Highway Authority's Specification and Design Guide. Their drawing is intended for guidance only and must be read in conjunction with the above document which will supersede their drawing in the event of a conflict.
- Their drawing is to be read in conjunction with all other relevant engineers, architects and specialist design drawings and details. Any discrepancies or errors found shall be reported to the engineer in writing immediately.
- All dimensions shown are in millimetres unless noted otherwise and all levels and coordinates relate to topographical survey information.
- Do not scale from their drawing, if in doubt ask.
- Site Preparation**  
The site is to be cleared of all rubbish, undergrowth and unwanted matter. Vegetable matter shall be stripped and any roots grubbed up. All material to be disposed to a tip provided by the Contractor unless otherwise agreed in the Specification/Contract.  
**Unless laboratory information states otherwise, all existing carriageway construction is deemed to contain tar-bound material and needs to be dealt with accordingly.**
- Excavation**  
The Contractor will be responsible for all necessary dewatering and trench support to execute the work in a satisfactory manner and will be deemed to have included for the same within their price.
- Drainage**  
For drainage construction details see the specific drainage drawing/s.
- Road Construction**  
During construction, if bituminous layers are trafficked or become contaminated prior to the next layer being laid, a bond coat must be applied. A bond coat shall be applied prior to the laying of a new asphalt layer on any bound substrate.  
Bitumen emulsion bond coats to conform to BS EN 13108 with minimum cohesion in accordance with BS EN 13808:2013, Table 4, Class 4. The bond coat shall have BBA/HAFAS accreditations and comply with BS 594987:2015 and A1:2017.
- Service Apparatus**  
The depiction of any service apparatus on their or any other drawing has been obtained from third party sources and is not necessarily accurate or complete. At no time does the inferred position on the drawing absolve the Contractor from taking all necessary steps to locate service apparatus in accordance with the methods suggested by the highway authority. The Developer and Engineer will accept no claims whatsoever in respect of any losses or damage caused in respect of such apparatus, however caused.  
The Contractor shall be deemed to have allowed for locating of service apparatus by hand digging in their price.
- Signing and Road Markings**  
All signing for road markings works shall be in accordance with TSRGD 2016, the relevant Traffic Signs Manual chapters, and Safety at Streetworks and Roadworks Code of Practice.
- Inspections**  
The Contractor shall be deemed to have included for any necessary testing, trial holing and liaison with the highway and LLFA authorities within their price.