Existing Conservatory to be altered and converted to Day Room as shown.

Existing walls to be raised with new cavity walls as shown.

Existing floor to remain.

Existing foundations to be widened as shown. Provide suitable 12mm dia. Metal dowels 200mm long at 600 centres to tie the new foundations to the existing.

External materials roof tiles and facing bricks to match existing.

Provide Steel Ridge Beam as shown all to Structural Engineers calcs/details.

Proposed new roof to match that of existing roof i.e. roof pitch etc.

Build in Velux roof lights all to manufacturers instructions.

Roof to have tiles on 38x25 softwood treated battens on underfelt to BS747(Type 1F) lapped 150 horizontally and 100 vertically on 125 x 50 SC3 grade rafters at 400 centres.

Steel beam to be encased to give min. 0.5hour fire protection.

Make good to all disturbed and affected areas.

New/Old Walling
Where new walling meets old provide proprietary flexible wall starters.

Roof Ventilation to Sloping Ceiling
At eaves provide proprietary ventilation equivalent to a 25mm continuous gap along eaves. At ridge provide proprietary ventilation equivalent to a 5mm continuous gap.

Safety Glazing
Provide safety glass to BS6206 to all windows to a minimum height of 800mm above floor level plus doors to a minimum height of 1500mm above floor level. Side screens to be same as doors if within 300mm of doors.

Glazing
All windows and doors to be double-glazed with Pilkington 'K' glass or similar approved, to achieve either WER Band C or a 'U' value of 1.6W/m²K.

Electrical Work
All electrical work required to meet the requirements of Part P (electrical safety) must be designed, installed, inspected and tested by a person competent to do so. Prior to completion of the works the council must be satisfied that either:-
a) an electrical installation certificate issued under a competent person's scheme has been issued
or
b) an appropriate electrical installation certificate has been issued for the work, and that it has been signed by a person competent to do so.

External Cavity Wall Lintels for 300mm Cavity Walls
IG type L1/S100 unless stated otherwise. To be confirmed on site with Building Control Surveyor.

Purge ventilation to windows
For a hinged or pivot window that opens 30° or more the height and width should be at least 1/20th of the floor area of the room.
For a hinged or pivot window that opens less than 30° the height and width should be at least 1/10th of the floor area.

Background Ventilation
Background ventilation is to be provided by trickle ventilators to the tops of windows. Use trickle vents offering 8000mm² per window head. Ventilation for whole extension to be 25,000mm²

Roof Insulation to Sloping Ceiling
To ceiling slope provide 50mm Celotex GA4000 between rafters and 70mm Celotex CA4000 below rafters with joints taped to create VCL + air leakage barrier batten air space – low emissivity – 12.5mm Knauf wallboard, or similar approved. All to give 0.18W/m²K.

All soakaways to be minimum 1m deep.

All external lintels to be insulated type.

All external joinery to be fully draught proofed.

Insulation in roof space to meet with insulation in external cavity walls to prevent cold bridging.

Seal all openings and joints to perimeter walls.

All doors, windows and any loft hatches to be effectively sealed and draught proofed.

External Wall Construction (300mm cavity)
100mm facing brickwork (see site plan for details)
100mm Cavity with ISOVER, HI-CAV 32 insulation
100mm inner skin of tarmac Hemalite blocks
Cavity wall ties to be stainless steel type spaced 900mm horizontally and 450mm vertically to BS1243;1978. Internal block walls to receive 10mm sand/cement render and skim. Robust details in accordance is T50,2001

Rainwater Goods
PVC rainwater goods 110mm half-round gutters and 68mm diameter downpipes.

Habitable Room Trickle Ventilation
Provide proprietary trickle ventilators to head of windows giving a total opening area of not less than 8000mm²

Surface Water Drainage
To be proprietary 110mm diameter p.v.c. pipes flexible joined to fall 1:70 bedded in 100mm pea gravel. Pipes to discharge into 1200mm diameter soakaways sited 5000mm away from buildings.

Protection to Underground Pipes
Where pipes are not under road and have less than 600mm cover concrete paving slabs should be laid as bridging above the pipes on minimum 75mm pea gravel. If flexible pipes are under a road and have less than 900mm cover reinforced concrete bridging should be used instead of paving slabs. Provide compressible material below slab/concrete.

Ceilings
To all insulated roof ceilings provide 12.5mm Gyproc Duplex plasterboard of 10kg/m² or similar and either 5mm skim or Artex finish. To remaining ceilings provide 12.5mm Gyproc plasterboard or similar with finishes as above.

Lintels
All coded lintels as stated in Schedule or marked on plan to be by I.G. To be installed in strict accordance with manufacturers instructions. Form d.p.c. cavity tray above all lintels. To all exposed lintels i.e. not sheltered from overhanging eaves, etc. to have proprietary weepholes to joints of brickwork at approximately 450mm c/c. To be confirmed on site with Building Control Surveyor

Opening at eaves level to be L1/E lintels by I.G. or similar approved.

All windows to give minimum 1/20th of floor area as ventilation and to be double-glazed.

General Notes

Do not scale from this drawing.

This drawing is copyright and may not be altered, traced, copied, photographed or used for any purpose other than that for which it is issued without written permission from Messrs Status Design

The General Contractor is to check all dimensions on site and report discrepancies to the Architect

All details shown on this drawing are based upon typical site conditions related to the area. No responsibility can be accepted for abnormal conditions unless reported to the Architect so that design amendments may be considered. Site soil surveys are recommended in respect of foundations to establish specific site conditions before foundation work is undertaken

Please note this drawing is not a conveyance drawing.

Proposed on-site soakaways to be maintained by the owner for the life duration of the property.

This drawing is limited in the amount of information contained and does not purport to contain a full specification of the works. It is solely for the purpose of obtaining Planning and Building Regulations approvals. This drawing must not be used as a contract document alone. The works will not be supervised or inspected by Status Design unless specifically contracted to do so. It is the client or their agent's responsibility to control workmanship, substitution of materials, adherence to specification, variations to contract, etc.


All materials to be new unless stated otherwise and all components and materials, etc. to be used, fitted and installed, etc. in strict accordance with manufacturers' instructions and relevant Code of Practice. Materials should conform to appropriate British Standard specification or BBA Certificate or European Code equivalent

The Employer/Client shall ensure that the selected contractor is conversant with and adopts all measures necessary to achieve compliance with Health and Safety Legislation for Building Sites and Work Places. The Employer/Client is advised that should the works need to comply with the Construction Design and Management Regulations 2015 (CDM) and Health and Safety at Work, etc., Act 1974 (HSW Act) an independent Planning Supervisor will be required, whom should be supplied with a set of all relevant drawings, etc.


The works shall comprise of all that shown on the drawings and information, etc. Works that may not specifically be shown but may be reasonably inferred as necessary to carry out the works shall be deemed to be included.

These notes relate to this drawing and all associated drawings.

It is the property/landowner's responsibility to be aware of the Party Wall, etc. Act 1996 when building or carrying out alterations in close proximity to adjoining neighbour's boundaries.

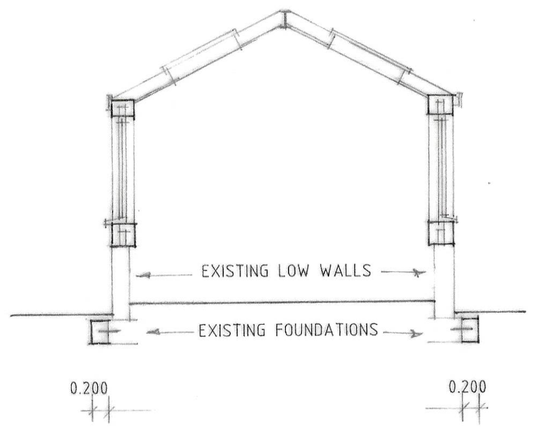

SECTION

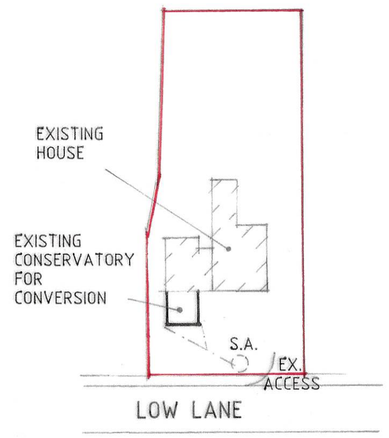

SITE PLAN

THIS DRG. TO BE READ IN CONJUNCTION WITH SD19-024/1, SD19-024/2

Status DESIGN
CONSULTANTS IN ARCHITECTURE & PLANNING

PROPOSED CONVERSION & ALTERATION OF CONSERVATORY TO DAY ROOM AT 37 LOW LANE, HOLBEACH FOR

MR. & MRS. M. GANDESHA.

SECTION/SITE PLAN

1:50	1:500	SD19-024/3
AUG-19		B.GILHAM.

2 Edinburgh Walk, Holbeach, Spalding, Lincs. PE12 7AP
Tel: 01406 424343 Fax: 01406 490702