


FRONT ELEVATION AS EXISTING




SUPERSEDED

FRONT ELEVATION AS PROPOSED

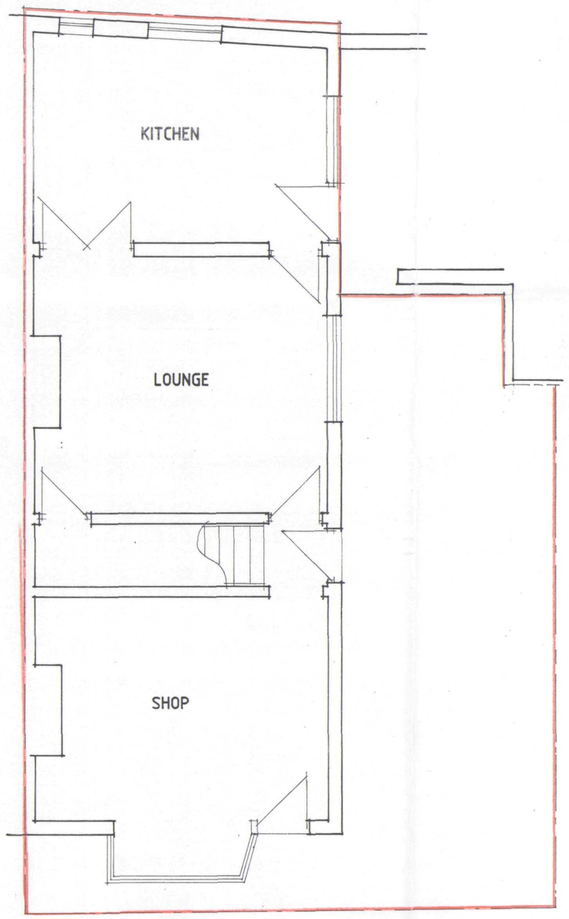

GROUND FLOOR PLAN / SITE PLAN AS EXISTING

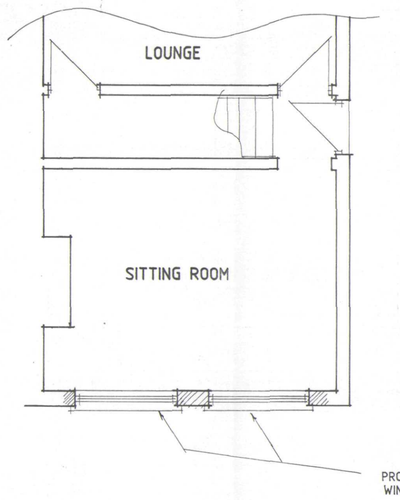

GROUND FLOOR PLAN AS PROPOSED

Remove existing shop front at ground floor level as shown.

Adjust openings to suit new replacement windows as shown. Support over with IG Box 200 lintels.

Use bricks to match those of existing where windows altered.

Brick arches and windowsills to match those of first floor windows.

Windows to be Boulton & Paul sliding sash Ref. VS1616 or similar approved. See typical details Ref. AD/110/095.

Windows to be positioned central with first floor windows.

All windows to give minimum 1/20th of floor area as ventilation and to be double-glazed.

Glazing
All windows and doors to be double-glazed with minimum 16mm spacing and to use Pilkington 'K' glass or similar approved, efficiency of 0.05.

General Notes

Do not scale from this drawing.

This drawing is copyright and may not be altered, traced, copied, photographed or used for any purpose other that that for which it is issued without written permission from Messrs Status Design.

The General Contractor is to check all dimensions on site and report discrepancies to the Architect.

All details shown on this drawing are based upon typical site conditions related to the area. No responsibility can be accepted for abnormal conditions unless reported to the Architects so that design amendments may be considered. Site soil surveys are recommended in respect of foundations to establish specific site conditions before foundation work is undertaken.

Please note this drawing is not a conveyance drawing.

Proposed on-site soakaways to be maintained by the owner for the life duration of the property.

This drawing is limited in the amount of information contained and does not purport to contain a full specification of the works. It is solely for the purpose of obtaining Planning and Building Regulations approvals. This drawing must not be used as a contract document alone. The works will not be supervised or inspected by Status Design unless specifically contracted to do so. It is the client or their agent's responsibility to control workmanship, substitution of materials, adherence to specification, variations to contract, etc.

All materials to be new unless stated otherwise and all components and materials, etc. to be used, fitted and installed, etc. in strict accordance with manufacturers' instructions and relevant Code of Practice. Materials should conform to appropriate British Standard specifications or BBA Certificate or European Code equivalent.

The Employer/Client shall ensure that the selected contractor is covenant with and adopts all measures necessary to achieve compliance with Health and Safety Legislation for Building Sites and Work Places. The Employer/Client is advised that should the works need to comply with the Construction Design and Management Regulations 1994 (CDM) and Health and Safety at Work, etc., Act 1974 (HSW Act) an independent Planning Supervisor will be required, whom should be supplied with a set of all relevant drawings, etc.

The works shall comprise of all that shown on the drawings and information, etc. Works that may not specifically be shown but may be reasonably inferred as necessary to carry out the works shall be deemed to be included.

These notes relate to this drawing and all associated drawings.

SHDC
Planning & Development
28 AUG 2003
Ref 1050/03

SUPERSEDED

Status DESIGN
CONSULTANTS IN ARCHITECTURE & PLANNING

PROPOSED ALTERATIONS TO
FRONT ELEVATION AT
12 ALBERT STREET, HOLBEACH
FOR

HOLBEACH DENTAL SURGERY

1:50 1:100	SD03-079/1
AUG-03	B.GILHAM.

2 Edinburgh Walk, Holbeach,
Spalding, Lincs. PE12 7AP.
Tel: 01406 424343 Fax: 01406 490702