



FRONT ELEVATION

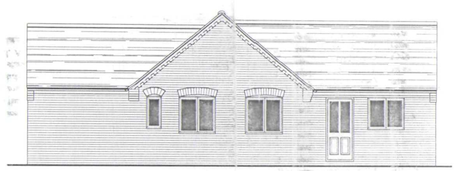


SIDE ELEVATION



REAR ELEVATION



SIDE ELEVATION

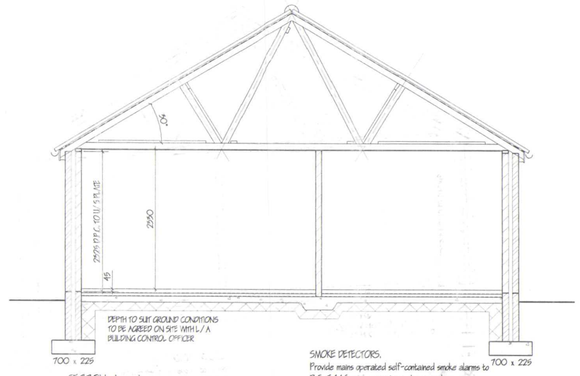

SECTION A - A

JOINERY / LINTEL SCHEDULE
ALL JOINERY CODES ARE RUSH JOINERY


POSN	JOINERY	LINTEL	LENGTH
1	UP7070NS	I.G.L.I/HD90	2700
2	FD12TF	I.G.L.I/590	1650
3	3I2CC	I.G.L.I/590	2100
4	NIOC	I.G.L.I/590	900
5	2I2CC	I.G.L.I/590	1500
6	2I2CC	I.G.L.I/590	1500
7	NIOC/FN29N-NOB	I.G.L.I/590	1800
8	2I0CC	I.G.L.I/590	1500
9	PALWEB	I.G.L.I/590	2100
10	3I5CC	I.G.L.I/590	2100
11	2N0CC	I.G.L.I/590	1200
12	2I2CC	I.G.L.I/590	1500
13	OPENING	I.G.BOXLOOHD	1800

SMOKE DETECTORS.
Provide mains operated self-contained smoke alarms to B.S. 5446: pt.i. in positions shown on plan.

GENERAL
All electrical installations to be in accordance with the latest I.E.E. Regulations.
All electrical switches and socket outlets to habitable rooms to be positioned at appropriate heights between 450mm & 1200mm from F.F.L.

SURFACE WATER DRAINAGE.
115mm dia. half round rainwater gutters to 65mm dia. rainwater pipes: 110mm dia. underground pipes flexibly joined to a fall of 1:70 pipes bedded and surrounded in pea gravel and discharge to 1.2m dia. soakaway min. 9.0m to edge from dwelling.

INTERNAL DOORS.
All internal doors to ground floor habitable rooms and toilet accommodation to be 838mm wide.

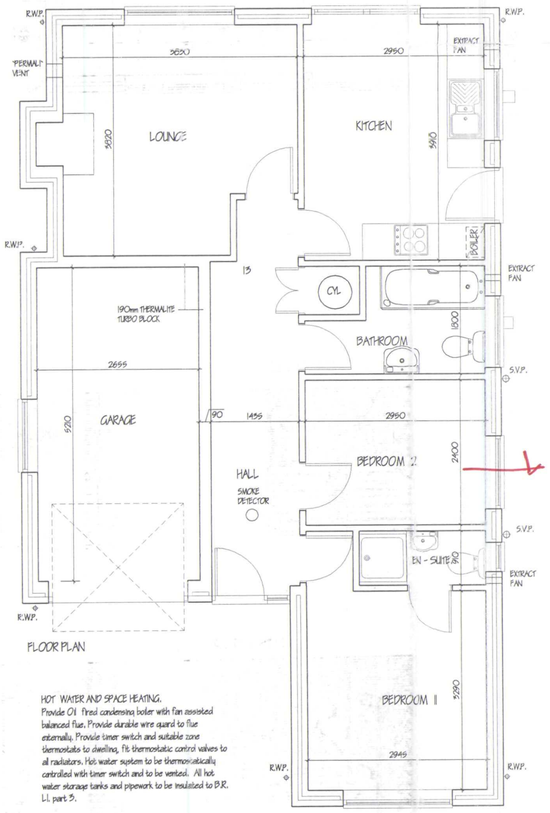

FLOOR PLAN

HOT WATER AND SPACE HEATING.
Provide Oil fired condensing boiler with fan assisted balanced flue. Provide durable wire guard to flue externally. Provide timer switch and suitable zone thermostats to dwelling, Fit thermostatic control valves to all radiators. Hot water system to be thermostatically controlled with timer switch and to be vented. All hot water storage tanks and pipework to be insulated to B.R. U.I. part 3.

GLAZING.
Double glaze property throughout (minimum 6mm air gap to all units) excluding garage. All glazing between F.F.L. and 800mm high and between F.F.L. and 1900mm high in doors and side lights to be safety glass to B.S. 6206. All windows/ doors to be draught sealed.

VENTILATION.
All windows to have opening lights to give the equivalent of 1/ 20th the floor area. Provide background ventilation to habitable rooms min. 8000mm sq permanent free air ventilation per room. To all other rooms provide min 4000 sq. All following rooms to have in addition to above Wall/ Window mounted mechanical extractor fan. Kitchen to extract min. 60 litres per second. Utility rooms to extract min. 30 litres per second. Bathrooms to extract min. 15 litres per second which may be operated intermittently. W.C. to extract min. 6 litres per second with 15 minute overrun.

PITCHED ROOF CONSTRUCTION.
Interlocking concrete roof tiles to B.S. EN 490 / 491, on 25 x 38 softwood treated battens on underfelt to B.S. 747 (type 1F) and in all cases to be lapped by 150mm both vertically and horizontally. Tiles to be laid with min. headlap of 75mm and to be fixed in accordance with nearest to wind speed, roof pitch and exposure category as detailed in CP3 chapter V part 2 1972. Twinaclate specialist made prefabricated roof trusses to comply with B.S. 5268 part 3 1988. TRUSS CALCS TO BE SUBMITTED TO L/A. MIN. 28 DAYS PRIOR TO ERECTION. Trusses to be at 600c/c to a pitch of 30 & 40 deg. 38 x 100 ridge node binder 35 x 100 ceiling binders. All trusses to be strapped to wall plate by 30 x 5 galvanised metal straps acting as anchor and lateral restraint straps at max. 1.5m c/c. Note: provide solid bridging beneath straps: 90 x 100 wall plate bedded on sand and cement: 25 x 175 fascia boards: 6mm ext. grade plywood soffit complete with 10mm wide continuous air gap and fly proof screen: All structural timber to be min. SC5 grade. Where span of trussed rafter exceeds 5.0m provide additional bracing within the plane of the web in accordance with Truss Plate Assoc. tech. bulletin sheet 4: Timber supports are to be provided beneath water storage tanks over 450 litre capacity. At roof intersections provide 25 x 100 lay boards and diminishing trusses at 600 c/c: Install code 4 lead valley liner.

CEILINGS.
200mm glasswool insulation total thickness. 100mm between joists & 100mm over Joists. 12.7mm Gyproc plasterboard 3mm skim Finish: Provide min. 50 x 38 noggins to all plasterboard edges. All joints to be taped and filled. Garage ceiling to be 12.7mm Gyproc Fireline board and Artex: Provide access trap to roof space: opening to be lined with 25 x 229 planted stops: Access panel to be 12mm ply with layer of 12.7mm Fireline board fixed to face. 100mm Jabfix to top surface. Provide slide bolt fastening & draught seal all round

WALLING.
265 cavity walling to consist of face brickwork to B.S. 3921:1974 for clay bricks and B.S. 187:1978 for calcium silicate bricks: 65 cavity: build into cavity Rockwool cavity wall batten insulation boardline in accord. with makers instructions and averments certificate No. DPI/10E7. 100mm Tarmac Hemelite solid insulation blocks: or similar: Cavity walls tied together using galvanised iron twist ties set: 900 horizontally and 450 vertically to B.S. 1243:1978 wall ties positioned at 300 vertical centres at all unbonded closures of cavity: Close cavities with "thermabatt" preformed closer and provide 5 batten felt DPC to C.P. 121: External walls to have min. "U" value of 0.45 W/m2 deg. C.: Internal walls of 100mm Tarmac Hemelite solid insulation blocks: All to receive 10mm S/C render and 3mm skim (except garage).

SUB STRUCTURE WALLING.
100mm dense concrete blocks to B.S. 6073 pt.1 1981: DPC to external wall positioned in accordance with CP 102 min. 150 above finished ground level. Mesh reinforcement to be placed in every second course of cavity fill. Mesh mix concrete infill to base of cavity no closer than 225 to DPC. All brickwork below DPC to be F.L. quality.

LEVEL ENTRY THRESHOLD
Provide "Dalton & Paul" Mobility door frame & threshold (FN29M-NOB) to all level entrance to building.

FOOTPATHS/DRIVES.
Provide min. 900mm wide footpath positioned at D.P.C. level and min 150mm away from face of wall to perimeter of building. As entrance positions ramp up to top of sub cill min 1:20. All footpaths to have slight fall away from building. Gap between wall & footpath to be filled with 150mm depth of 20mm washed gravel. At least 9.0m of drive adjacent to building x 1.0m wide to be hard standing i.e. Concrete, Tarmac or Block. pavors. All to be sloped up to footpath level at min. 1:20

GROUND FLOOR CONSTRUCTION.
Strip all vegetable soil and lay floor as follows: 70mm sand and cement screed with chicken wire reinforcement on 500g polythene D.P.M. on 50mm Polystyrene insulation board, on 1200g polythene D.P.M. lapped continuous with D.P.C. by min. 100mm, on 300mm wide D.P.M. strip into D.P.C. to lap over D.P.M. All on 100 concrete oversite: Concrete mix GEN 1A to B.S. 5328: pt 1997: 150 blinded and consolidate: hardcore.

FOUNDATIONS.
Outer walls to be taken provide strip concrete foundation as follows: Under 265 cavity walls provide 225 x 750 and under 100 walls provide 225 x 450 all GEN 1 mix to B.S. 5328: pt 1997. All foundations taken down to bear on load bearing strata min. depth of 600 to top of foundations: should shrinkable soil conditions be found on site then foundations shall be taken down to a depth of 1 metre below ground level. Where internal walls are taken up off floor then thicken out slab to 225 x 450 or if considered necessary be taken down to 225 x 150 foundation.

FLUE CONSTRUCTION.
225mm internal diameter clay flue liners to B.S. 1181: 1971 and to be laid socket uppermost: 100 face brickwork surround to flue and to extend min. 600mm above ridge line and terminate in corbelled out brickwork and clay pot. Weak mix. conc. infill around flue as work proceeds. Trim roof around flue, no timber within 450mm of flue: At roof/ flue intersection provide code 4 lead flashing and 2 course engineering bricks.

OPEN FIRE.
To be capable of burning smokeless fuel: Hearth to be constructed of non combustible material min. 125mm thick. To project from face of wall by min. 500mm and pass reveals by min. 150mm. All in accordance with approved document part J. (part C 1-29). Appliance to be in accordance with building regulations. Provide louvered permanent vent in ext. wall to give min. 50% of the appliance throats opening area positioned 150 above floor level. Provide 65 x 100 prestressed conc. lintel over chimney opening.

LINTELS.
All lintels to be manufactured by Messrs. I.G. and to be installed in accordance with makers' instructions, and to have min. end bearing of 150mm and at external positions to have cavity tray D.P.C. to C.P. 121: Internal lintels to be I.G. 100 Box type. Lintels in quinoin to be underlined with 12.7 fireline board or receive 12mm render and skim. Provide Perp-end weep holes and stopends to cavity tray

FOUL DRAINAGE
Inspection chamber construction to be "Osmal" and installed in accordance with makers' instructions with the internal diameter related to the depth in accordance with B.S. 8301:1985. Foul drainage pipes to be 110mm dia. UPVC, to B.S. 4660:1989 flexibly jointed and laid to makers' instructions to a fall of 1:70 bed and surround with 100mm pea gravel: Where pipes pass under floors encase in 150mm pea gravel: Where pipes pass under drives surround in 150mm concrete with flexel joints to correspond with joints in pipework. Provide 65 x 100 prestressed concrete lintel bridging where pipes pass through walls, allow 50mm clear around pipe, openings marked both sides of wall with rubber sheet material: Soil and vent pipes to be 110mm dia. PVC to B.S. 4514: 1989 and to extend 900mm above window head terminating with PVC balloon. Waste pipes to be 40mm dia. PVC to B.S. 5955: 1979 complete with rodding eyes at every change of direction: Bath, basins and sink to have 75 deep seal traps: Shower to be raised on 150mm plinth with access plate to anti-syphon trap and 50mm waste.

DETERMINED PLAN

LIMITATIONS.
This drawing is limited in the amount of information contained and does not purport to contain a full specification of the works. It is solely for the purpose of obtaining Planning/ Building Regulation approval. The drawing must not be used as a contract document alone.
All dimensions shall be taken from site from actual work. Under no circumstances shall measurements be scaled from this drawing for construction or ordering purposes. All given dimensions shall be checked by the Builder / Contractor and will be his responsibility from commencement of site works.
The works will not be supervised or inspected on site by G.R. Merchant. or any representative thereof. It is the client or their appointed agents responsibility to control workmanship, substitution of materials, adherence to specification, variations to contract etc.

COPYRIGHT RESERVED.
Copies of this drawing must be made only with the written permission of G.R.Merchant.

STANDARDS.
All materials to be new unless otherwise stated and all components and materials etc. to be used fitted and installed etc. in strict accordance with manufacturers instruction and relevant Code of Practice.
Materials shall conform to appropriate British Standard Specification or BBA Certificate or European Code equivalent.

HEALTH & SAFETY.
The Employer / Client shall ensure that the selected contractor is conversant with and accepts all measures necessary to achieve compliance with Health & Safety legislation for Building Sites and Work Places.
The Employer / Client is advised that should the works need to comply with the Construction Design and Management Regulations an independent Planning Supervisor will be required.

SCOPE OF THE WORKS.
The works shall comprise of all that is shown on the drawing and details. Work that may not be specifically shown but may be reasonably inferred as necessary to carry out the works shall be deemed to be included.

SMDC
Planning & Development
23 AUG 2004
Ref: 1124/04

ref.	revision	date
A	REDUCE IN SIZE	AUG '04

G. R. MERCHANT
I.ENG AMICE FIWO
ARCHITECTURAL, STRUCTURAL AND LAND DRAINAGE CONSULTANTS
Unit 4, Wrights Mews
12A Park Road, Holbeach,
Spalding, Lincs. PE12 7EE
Tel: 01406 490800
Fax: 01406 425744
E-Mail: G. R. Merchant @ Merchant. Fsb. Co. UK

Project
BUNGALOW & GARAGE,
JEKIL'S BANK,
HOLBEACH - ST-JOHNS,
SPALDING, LINC'S.

Client
MR. & MRS. K. PALL.

Drawing
FLOOR PLAN & ELEVATIONS

Job Ref.	Drawing No.
930-04	01A
Date: MARCH '04	Drawn: J.C.

Scales
1:50 1:100

DO NOT SCALE FROM THIS DRAWING
This drawing is copyright and may not be altered, traced, photographed or used for any other purpose other than that for which it is issued.
The General Contractor is to check all dimensions on site and report any discrepancies to the Architect.
All details shown on this drawing including foundations are based upon typical site conditions related to the area. No responsibility can be accepted for abnormal conditions which may be discovered during construction unless reported to the Architect so that design amendments may be considered. Site soil surveys are recommended in respect of foundations to establish specific site conditions before foundation work is undertaken.