LIMITATIONS.
This drawing is limited in the amount of information contained and does not purport to contain a full specification of the works. It is solely for the purpose of obtaining Building Regulation approval.
The drawing must not be used as a contract document alone.
All dimensions shall be taken from site from actual work. Under no circumstances shall measurements be scaled from this drawing for construction or ordering purposes.
All given dimensions shall be checked by the Builder / Contractor and will be his responsibility from commencement of site works.
The works will not be supervised or inspected on site by C.A.D. or any representative thereof. It is the client or their appointed agents responsibility to control workmanship, substitution of materials, adherence to specification, variations to contract etc.

COPYRIGHT RESERVED.
Copies of this drawing must be made only with the written permission of Cooper Architectural Design.

STANDARDS.
All materials to be new unless otherwise stated and all components and materials etc. to be used fitted and installed etc. in strict accordance with manufacturers instruction and relevant Code of Practice.
Materials shall conform to appropriate British Standard Specification or BBA Certificate or European Code equivalent.

HEALTH & SAFETY.
The Employer / Client shall ensure that the selected contractor is conversant with and adopts all measures necessary to achieve compliance with Health & Safety legislation for Building Sites and Work Places.
The Employer / Client is advised that should the works need to comply with the Construction Design and Management Regulations an independent Planning Supervisor will be required.

SCOPE OF THE WORKS.
The works shall comprise of all that is shown on the drawing and details. Work that may not be specifically shown but may be reasonably inferred as necessary to carry out the works shall be deemed to be included.

CEILINGS.
200mm glassfibre insulation total thickness. 100mm between rafters & 100mm over Joists. Provide access trap to roof space: opening to be lined with 25 x 25 planted stops: Access panel to be 12mm ply with layer of 12.7mm Fireline board fixed to face. Draught seal all round


WALLING.
Cavity walling consisting of face brickwork to B.S. 3921:1974 50 cavity: Inject into cavity Rockwool cavity wall blown fibre insulation in accord. with makers instructions and agrement cert' No.83/1087. 60mm studwork internal skin of 9mm Asbestolux each side of timber studs External walls to have min. "U" value of 0.45 W/ m2 deg. C.

GLAZING.
Double glaze properly throughout (minimum 12mm air gap to all units) with u.p.v.c.u windows. All glazing between f.f.l. and 800mm high and between f.f.l. and 1500mm high in doors and side lights to be safety glass to B.S. 6206. All windows/ doors to be draught sealed.

VENTILATION.
All windows to have opening lights to give the equivalent of 1/ 20th the floor area. Provide background ventilation to habitable rooms min. 8000mm sq permanent free air ventilation per room. To all other rooms provide min 4000 sq. All following rooms to have in addition to above Wall/ Window mounted mechanical extractor fan. Kitchen to extract min. 60 litres per second. Bathrooms to extract min. 15 litres per second which may be operated intermittently.

HOT WATER AND SPACE HEATING.
Provide wall mounted oil fire balanced flue condensing boiler in kitchen. Fit durable wire guard to flue externally Provide suitable thermostat to building or fit thermostatic valves to all radiators. Hot water storage system to be vented and all hot water storage tanks and pipes to be insulated to B.R. LI. part 3.

SMOKE DETECTORS.
Provide mains operated self-contained smoke alarms to B.S. 5446: pt.1. in positions shown on plan.

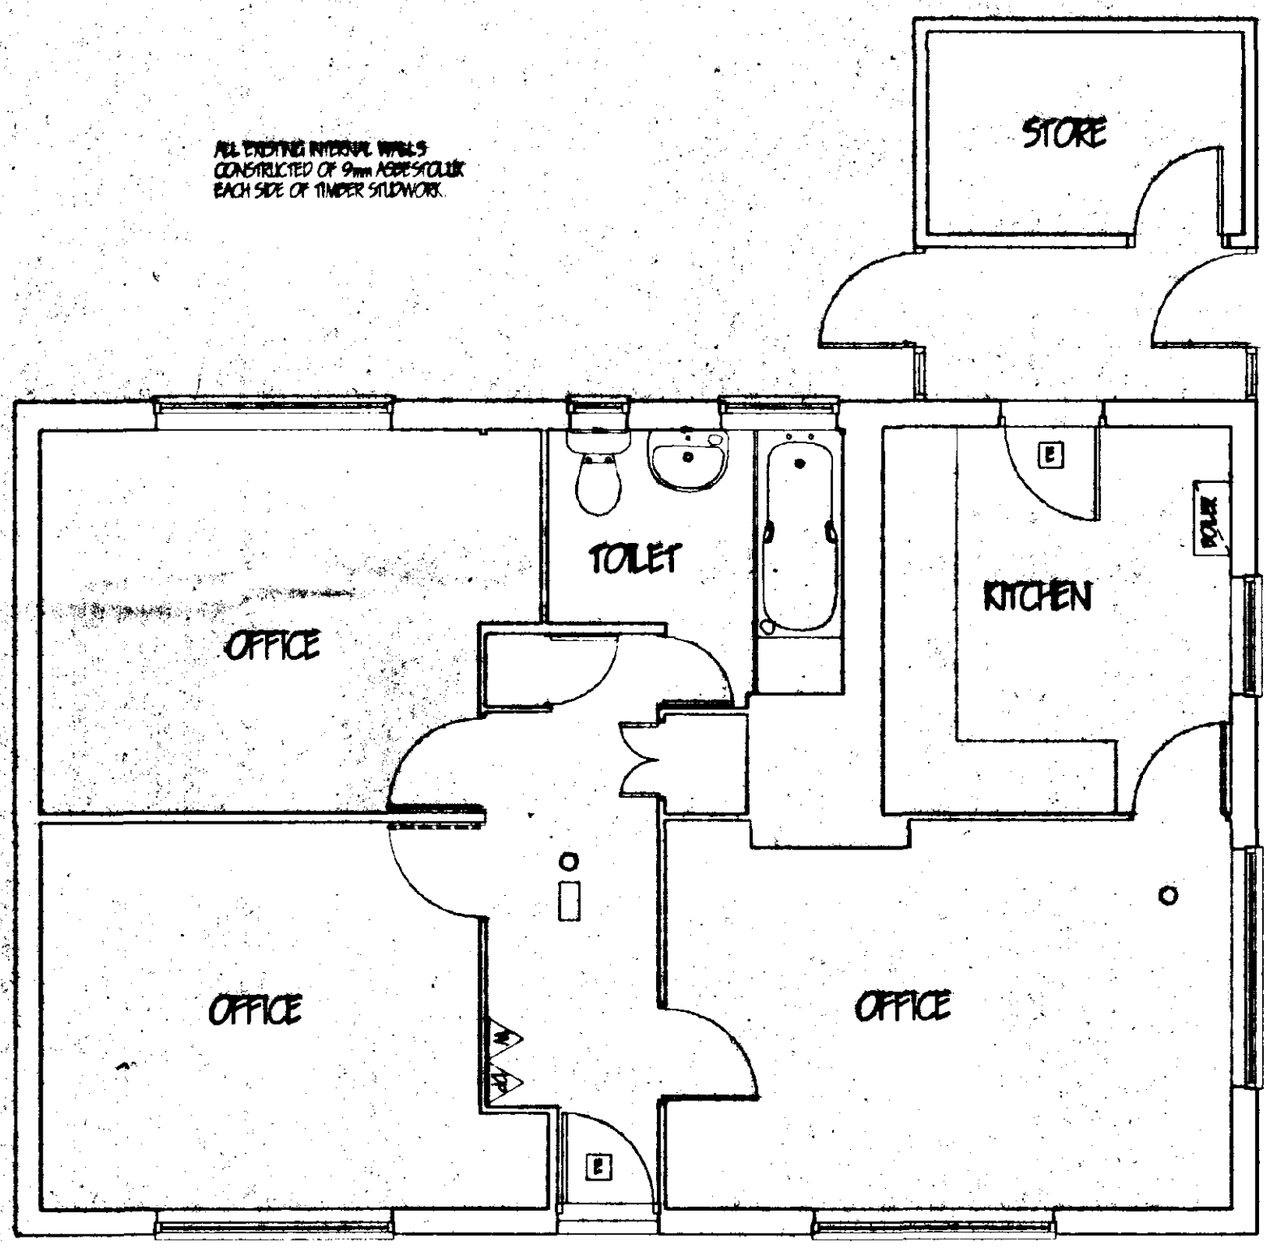

PLAN

E EMERGENCY EXIT SIGN TO B.S. 5499 PT 1.


SMOKE DETECTOR TO B.S. 5446 PT 1.

9 LITRE WATER FILLED FIRE EXTINGUISHER

4.5 Kg DRY POWDER FIRE EXTINGUISHER

EMERGENCY LIGHT TO B.S. 5266 PT 1.

30 MINUTE FIRE DOOR COMPLETE WITH SELF CLOSER AND INTUMESCENT SMOKE SEAL

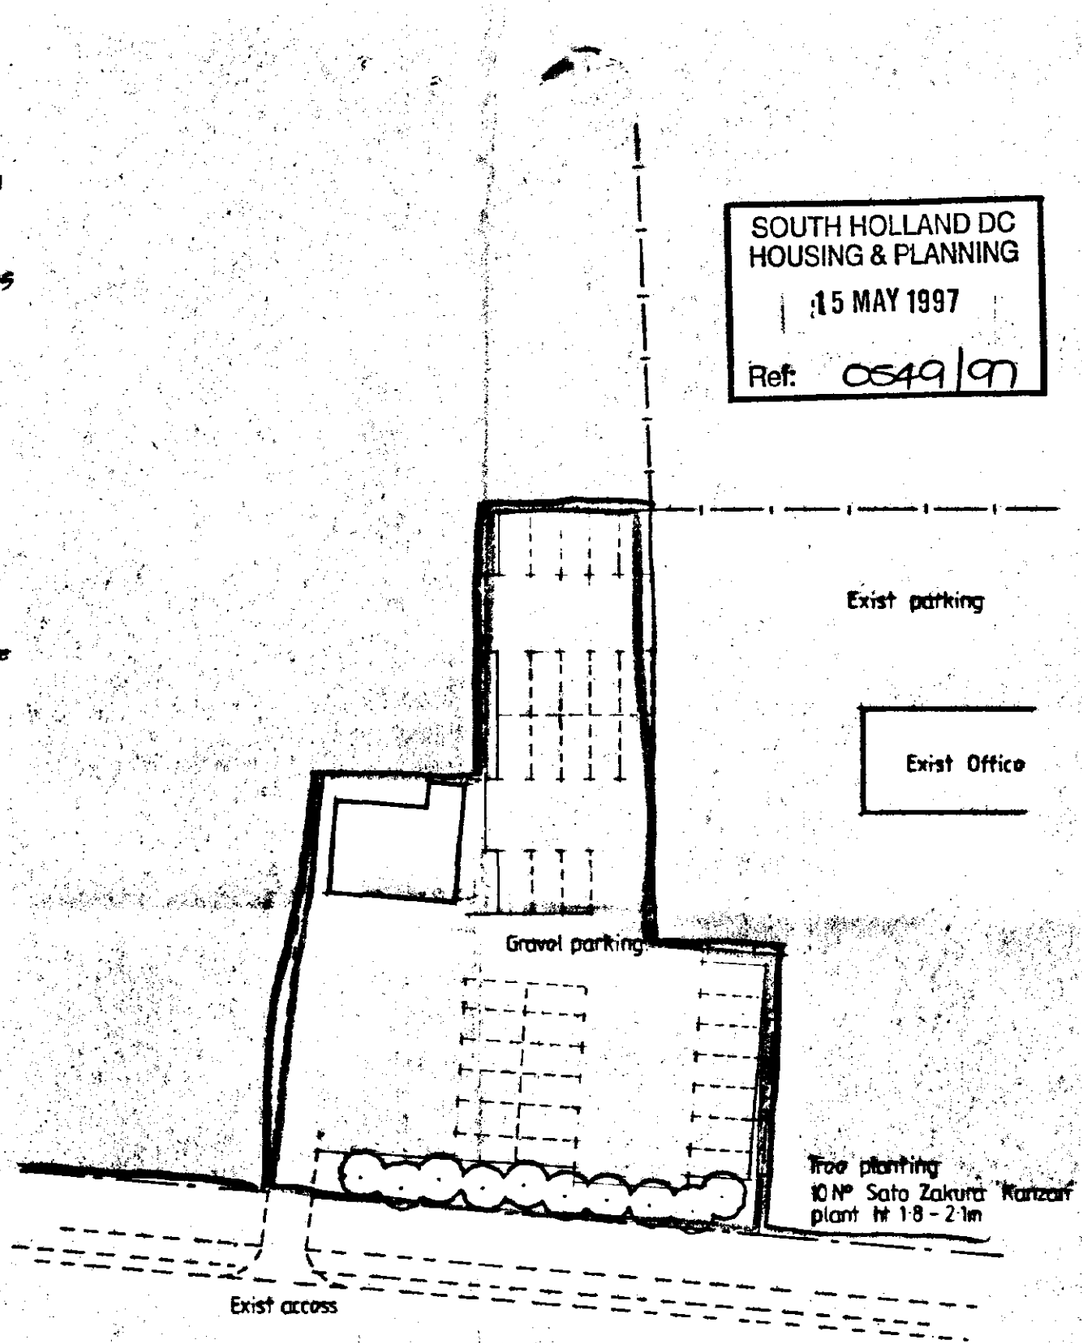

BLOCK PLAN 1:500

Revision	Date	Init	Revision Details

COOPER ARCHITECTURAL DESIGN
Bronavon, Hocklesgate,
Fleet, Spalding, Lincs
Tel/Fax 01406 423762

Client: H. L. FOODS LTD.

Project: PROPOSED CHANGE OF USE.
BUNGALOW TO OFFICE
BRIDGE ROAD,
LONG SUTTON.

Drawing:

Scale	Drawing No
1:50	9661
Date: MAY '97	Drawn: J.C.

LIMITATIONS.
This drawing is limited in the amount of information contained and does not purport to contain a full specification of the works. It is solely for the purpose of obtaining Building Regulation approval.
The drawing must not be used as a contract document alone.
All dimensions shall be taken from site from actual work.
Under no circumstances shall measurements be scaled from this drawing for construction or ordering purposes.
All given dimensions shall be checked by the Builder / Contractor and will be his responsibility from commencement of site works.
The works will not be supervised or inspected on site by C.A.D. or any representative thereof. It is the client or their appointed agents responsibility to control workmanship, substitution of materials, adherence to specification, variations to contract etc.

COPYRIGHT RESERVED.
Copies of this drawing must be made only with the written permission of Cooper Architectural Design.

STANDARDS.
All materials to be new unless otherwise stated and all components and materials etc. to be used fitted and installed etc. in strict accordance with manufacturers instruction and relevant Code of Practice.
Materials shall conform to appropriate British Standard Specification or BBA Certificate or European Code equivalent.

HEALTH & SAFETY.
The Employer / Client shall ensure that the selected contractor is conversant with and adopts all measures necessary to achieve compliance with Health & Safety legislation for Building Sites and Work Places.
The Employer / Client is advised that should the works need to comply with the Construction Design and Management Regulations an independant Planning Supervisor will be required.

SCOPE OF THE WORKS.
The works shall comprise of all that is shown on the drawing and details. Work that may not be specifically shown but may be reasonably inferred as necessary to carry out the works shall be deemed to be included.

CEILINGS.
200mm glassfibre insulation total thickness. 100mm between rafters & 100mm over Joists. Provide access trap to roof space: opening to be lined with 25 x 25 planted stops: Access panel to be 12mm ply with layer of 12.7mm Fireline board fixed to face. Draught seal all round


WALLING.
Cavity walling consisting of face brickwork to B.S. 3921:1974 50 cavity: Inject into cavity Rockwool cavity wall blown fibre insulation in accord. with makers instructions and agrement cert' No.83/1087. 60mm studwork internal skin of 9mm Asbestolux each side of timber studs External walls to have min. "U" value of 0.45 W/m2 deg. C.

GLAZING.
Double glaze properly throughout (minimum 12mm air gap to all units) with u.p.v.c.u windows. All glazing between f.f.l. and 800mm high and between f.f.l. and 1500mm high in doors and side lights to be safety glass to B.S. 6206. All windows/ doors to be draught sealed.

VENTILATION.
All windows to have opening lights to give the equivalent of 1/ 20th the floor area. Provide background ventilation to habitable rooms min. 8000mm sq permanent free air ventilation per room. To all other rooms provide min 4000 sq. All following rooms to have in addition to above Wall/ Window mounted mechanical extractor fan. Kitchen to extract min. 60 litres per second. Bathrooms to extract min. 15 litres per second which may be operated intermittently.

HOT WATER AND SPACE HEATING.
Provide wall mounted oil fire balanced flue condensing boiler in kitchen. Fit durable wire guard to flue externally. Provide suitable thermostat to building or fit thermostatic valves to all radiators. Hot water storage system to be vented and all hot water storage tanks and pipes to be insulated to B.R. LI. part 3.

SMOKE DETECTORS.
Provide mains operated self-contained smoke alarms to B.S. 5446: pt.1. in positions shown on plan.

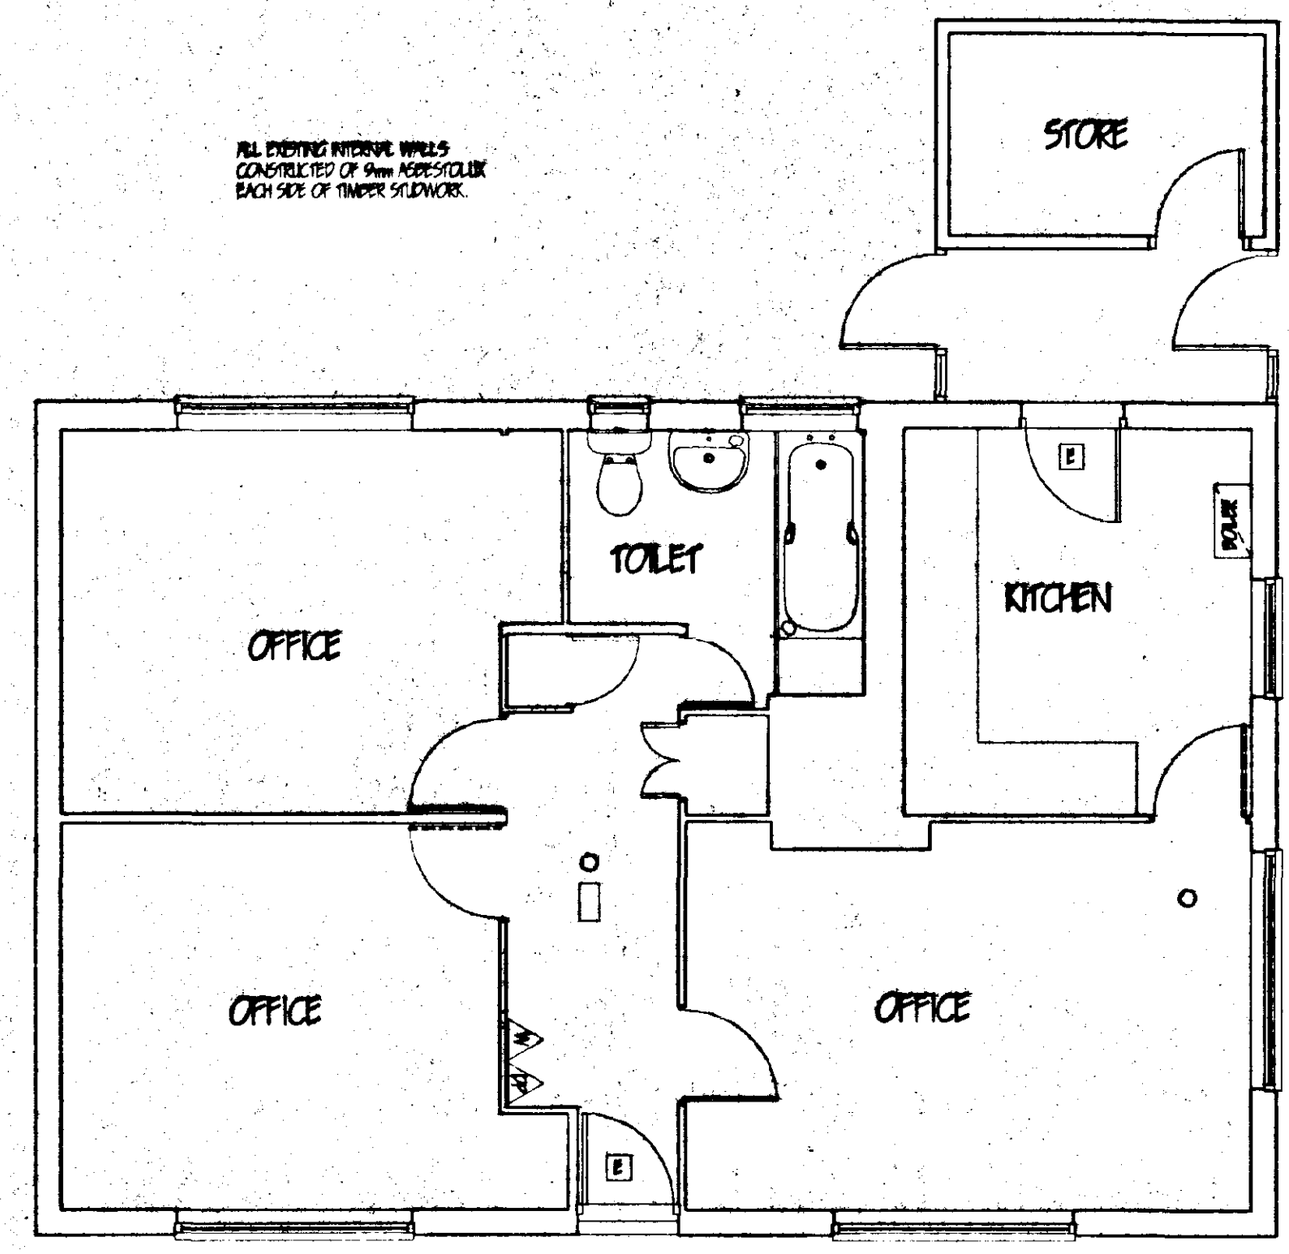

PLAN

E EMERGENCY EXIT SIGN TO B.S. 5499 PT1.


SMOKE DETECTOR TO B.S. 5446 PT1.

9 LITRE WATER FILLED FIRE EXTINGUISHER

4.5 Kg. DRY POWDER FIRE EXTINGUISHER

EMERGENCY LIGHT TO B.S. 5266 PT1.

30 MINUTE FIRE DOOR COMPLETE WITH SELF CLOSER AND INTUMESCENT SMOKE SEAL

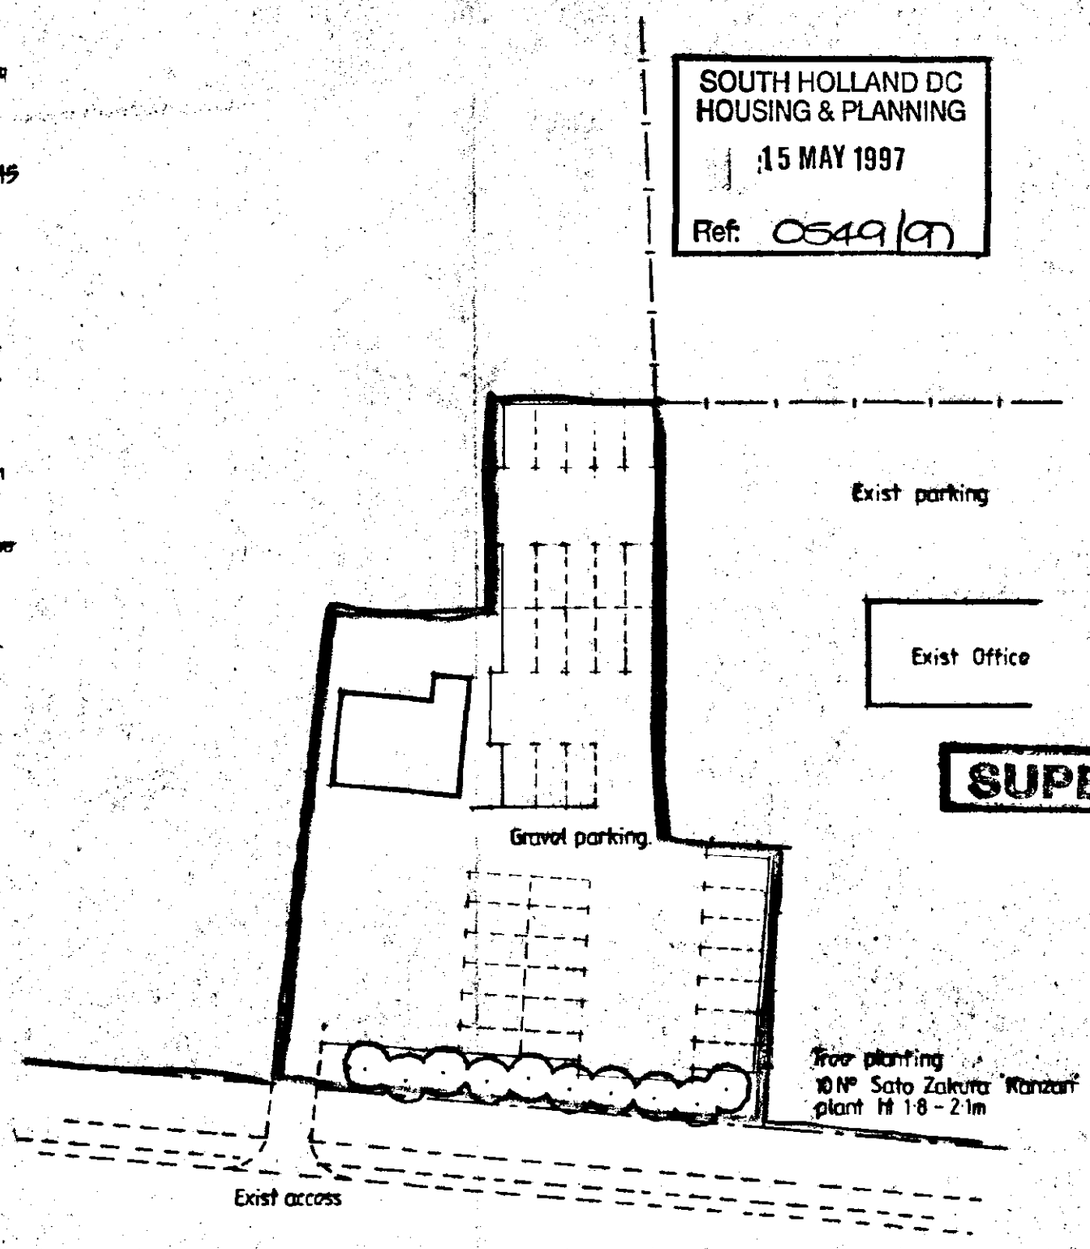

BLOCK PLAN 1:500

Revision	Date	Init	Revision Details

SUPERSEDED

COOPER ARCHITECTURAL DESIGN
Bronavon, Hocklesgate,
Fleet, Spalding, Lincs
Tel/Fax 01406 423762

Client: H. L. FOODS LTD.

Project: PROPOSED CHANGE OF USE.
BUNGALOW TO OFFICE
BRIDGE ROAD,
LONG SUTTON.

Drawing:

Scale	Drawing No
1:50	9661
Date: MAY '97	Drawn: J.C.

LIMITATIONS.
This drawing is limited in the amount of information contained and does not purport to contain a full specification of the works. It is solely for the purpose of obtaining Building Regulation approval.
This drawing must not be used as a contract document alone.
All dimensions shall be taken from site from actual work.
Under no circumstances shall measurements be scaled from this drawing for construction or ordering purposes.
All given dimensions shall be checked by the Builder / Contractor and will be his responsibility from commencement of site works.
The works will not be supervised or inspected on site by C.A.D. or any representative thereof. It is the client or their appointed agents responsibility to control workmanship, substitution of materials, adherence to specification, variations to contract etc.

COPYRIGHT RESERVED.
Copies of this drawing must be made only with the written permission of Cooper Architectural Design.

STANDARDS.
All materials to be new unless otherwise stated and all components and materials etc. to be used fitted and installed etc. in strict accordance with manufacturers instruction and relevant Code of Practice.
Materials shall conform to appropriate British Standard Specification or BBA Certificate or European Code equivalent.

HEALTH & SAFETY.
The Employer / Client shall ensure that the selected contractor is conversant with and adopts all measures necessary to achieve compliance with Health & Safety legislation for Building Sites and Work Places.
The Employer / Client is advised that should the works need to comply with the Construction Design and Management Regulations an independant Planning Supervisor will be required.

SCOPE OF THE WORKS.
The works shall comprise of all that is shown on the drawing and details. Work that may not be specifically shown but may be reasonably inferred as necessary to carry out the works shall be deemed to be included.

CEILINGS.
200mm glassfibre insulation total thickness. 100mm between rafters & 100mm over Joists. Provide access trap to roof space: opening to be lined with 25 x 25 planted stops: Access panel to be 12mm ply with layer of 12.7mm Fireline board fixed to face. Draught seal all round

WALLING.
Cavity walling consisting of face brickwork to B.S. 5921:1974 50 cavity: Inject into cavity Rockwool cavity wall blown fibre insulation in accord. with makers instructions and agrement cert' No.83/1087. 60mm studwork internal skin of 9mm Asbestolux each side of timber studs External walls to have min. "U" value of 0.45 W/ m2 deg. C.


GLAZING.
Double glaze properly throughout (minimum 12mm air gap to all units) with u.p.v.c.u windows. All glazing between f.f.l. and 800mm high and between f.f.l. and 1500mm high in doors and side lights to be safety glass to B.S. 6206. All windows/ doors to be draught sealed.

VENTILATION.
All windows to have opening lights to give the equivalent of 1/ 20th the floor area. Provide background ventilation to habitable rooms min. 8000mm sq permanent free air ventilation per room. To all other rooms provide min 4000 sq. All following rooms to have in addition to above Wall / Window mounted mechanical extractor fan. Kitchen to extract min. 60 litres per second. Bathrooms to extract min. 15 litres per second which may be operated intermittently.

HOT WATER AND SPACE HEATING.
Provide wall mounted oil fire balanced flue condensing boiler in kitchen. Fit durable wire guard to flue externally. Provide suitable thermostat to building or fit thermostatic valves to all radiators. Hot water storage system to be vented and all hot water storage tanks and pipes to be insulated to B.R. Ll. part 3.


SMOKE DETECTORS.
Provide mains operated self-contained smoke alarms to B.S. 5446: pt.l. in positions shown on plan.

ALL EXISTING INTERNAL WALLS CONSTRUCTED OF 9mm ASBESTOLUX EACH SIDE OF TIMBER STUDWORK.

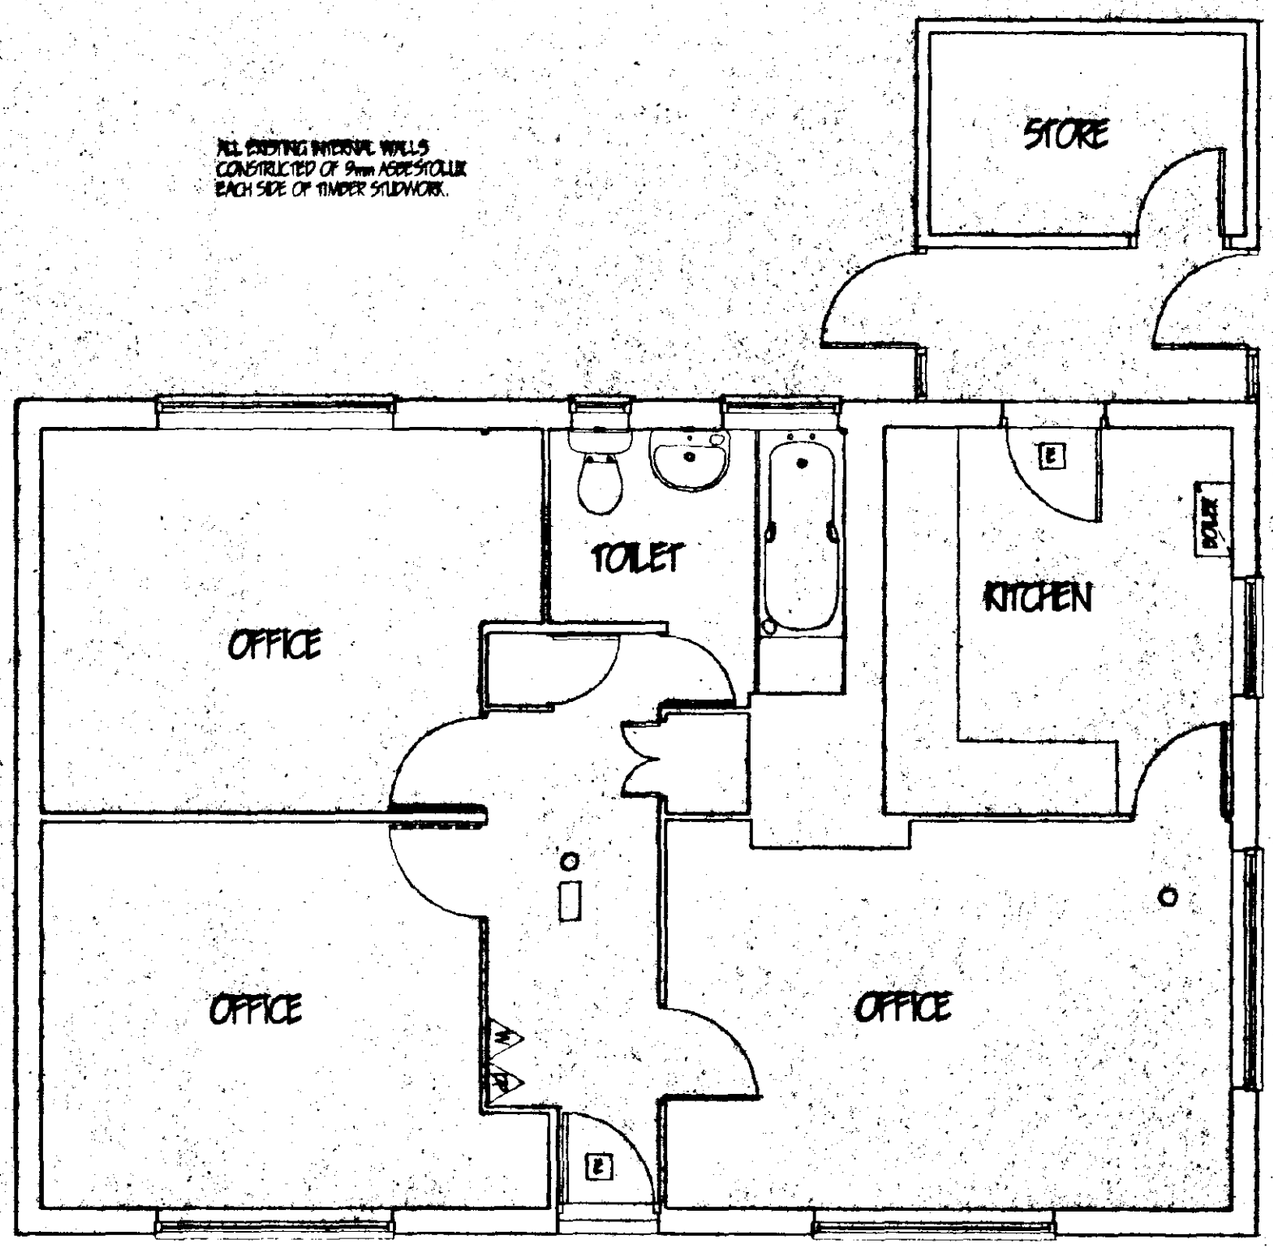

PLAN

E EMERGENCY EXIT SIGN TO B.S. 5499 PT1.
SMOKE DETECTOR TO B.S. 5446 PT1.
6 LITRE WATER FILLED FIRE EXTINGUISHER
9 4.5 Kg. DRY POWDER FIRE EXTINGUISHER
EMERGENCY LIGHT TO B.S. 5266 PT1.
30 MINUTE FIRE DOOR COMPLETE WITH SELF CLOSER AND INTUMESCENT SMOKE SEAL

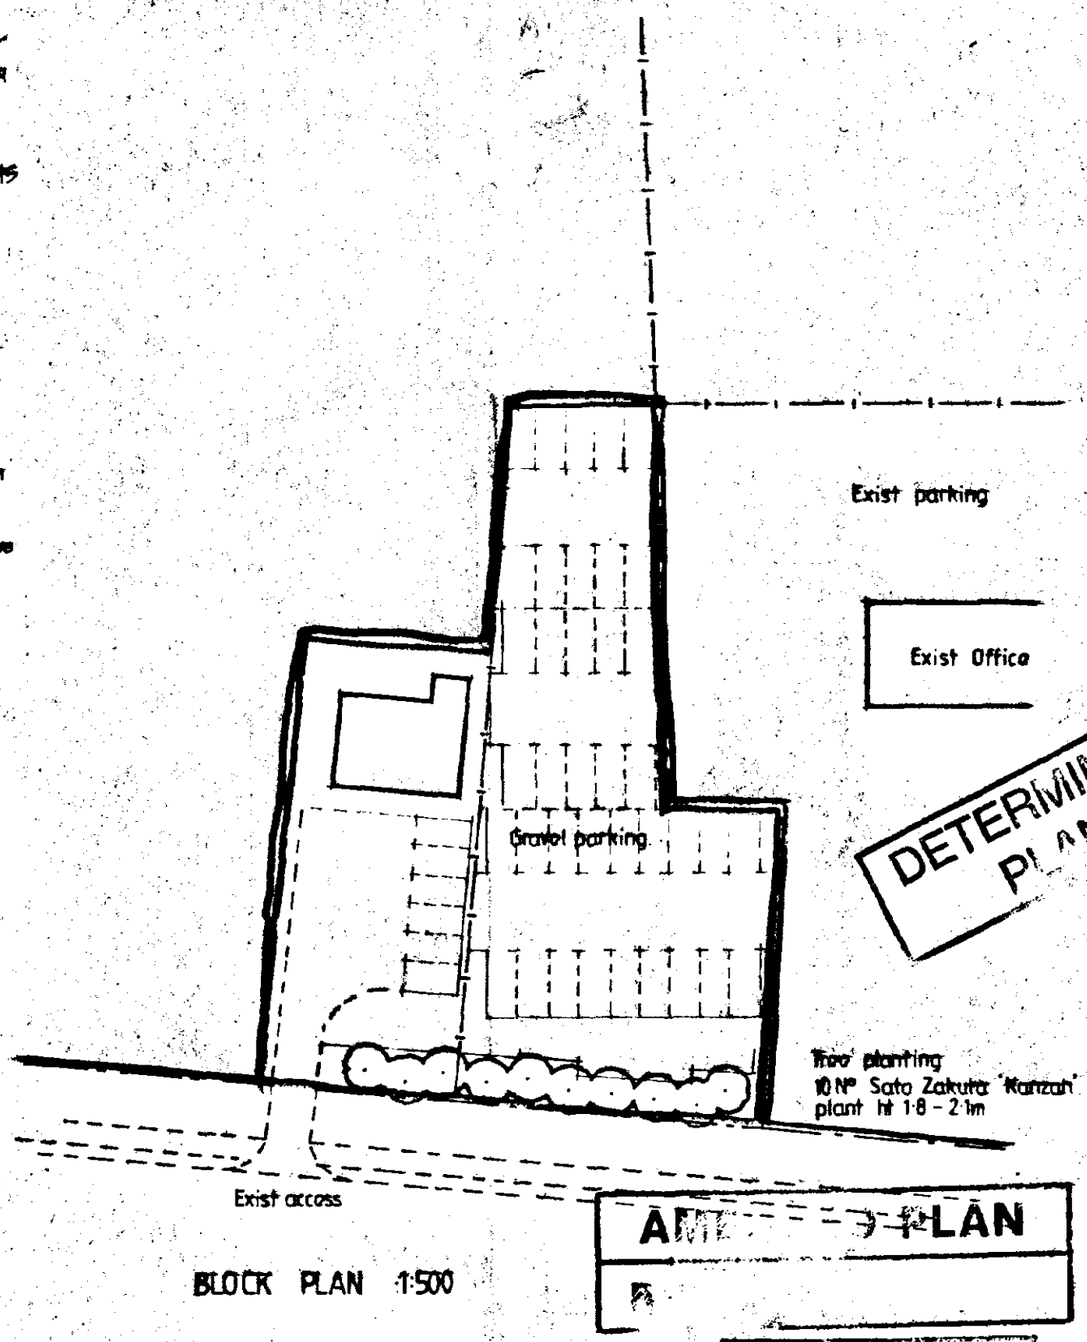

BLOCK PLAN 1:500

DETERMINED PLAN

SOUTH HOLLAND DC
HOUSING & PLANNING
12 JUN 1997
Ref: 0549/97

Revision	Date	Init	Revision Details

COOPER ARCHITECTURAL DESIGN
Bronavon, Hocklesgate,
Fleet, Spalding, Lincs
Tel/Fax 01406 423762

Client: H. L. FOODS LTD.

Project: PROPOSED CHANGE OF USE.
BUNGALOW TO OFFICE
BRIDGE ROAD,
LONG SUTTON.

Drawing:

Scale	Drawing No
1:50	9661
Date: MAY '97	Drawn: J.C.