


Side Bathroom

1 X Window - W5

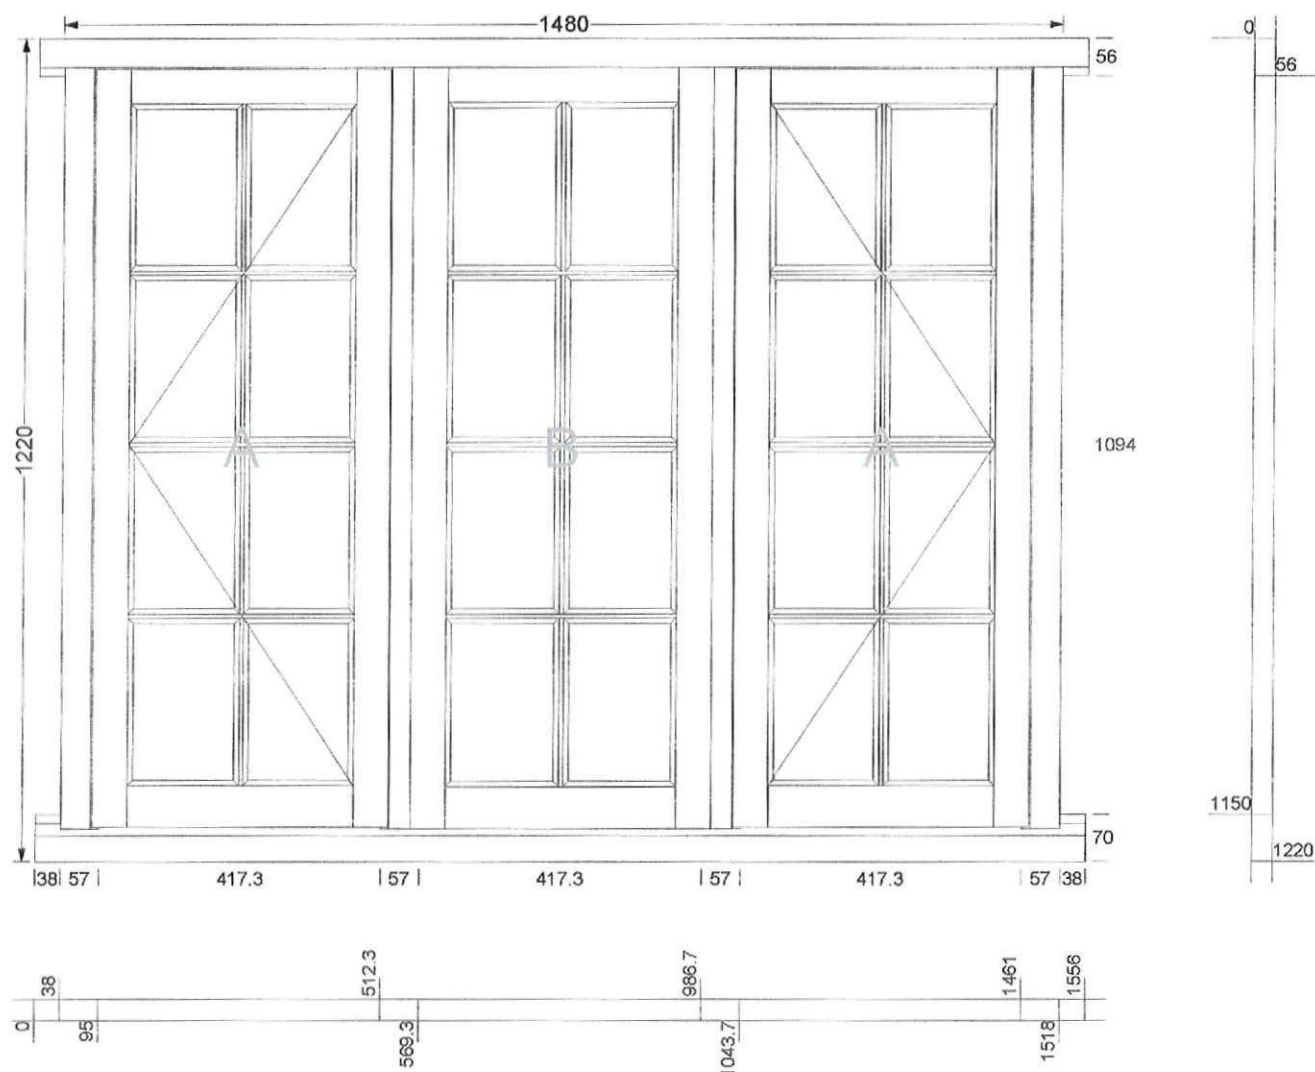


Window - (W5)

Side Bathroom 4 Panes High
 92mm Deep Frame, 25mm Stub Cill only, Ovolo Moulded 44mm,
 Flush Casements rebated for single glazing and putty, Brass Butt
 Hinges.
 Timber - Softwood Vac Vac Treated.
 Rebated for Single Glass 4mm (not supplied) 6mm Laminated
 Obscure



Bath

1 X Window - W4

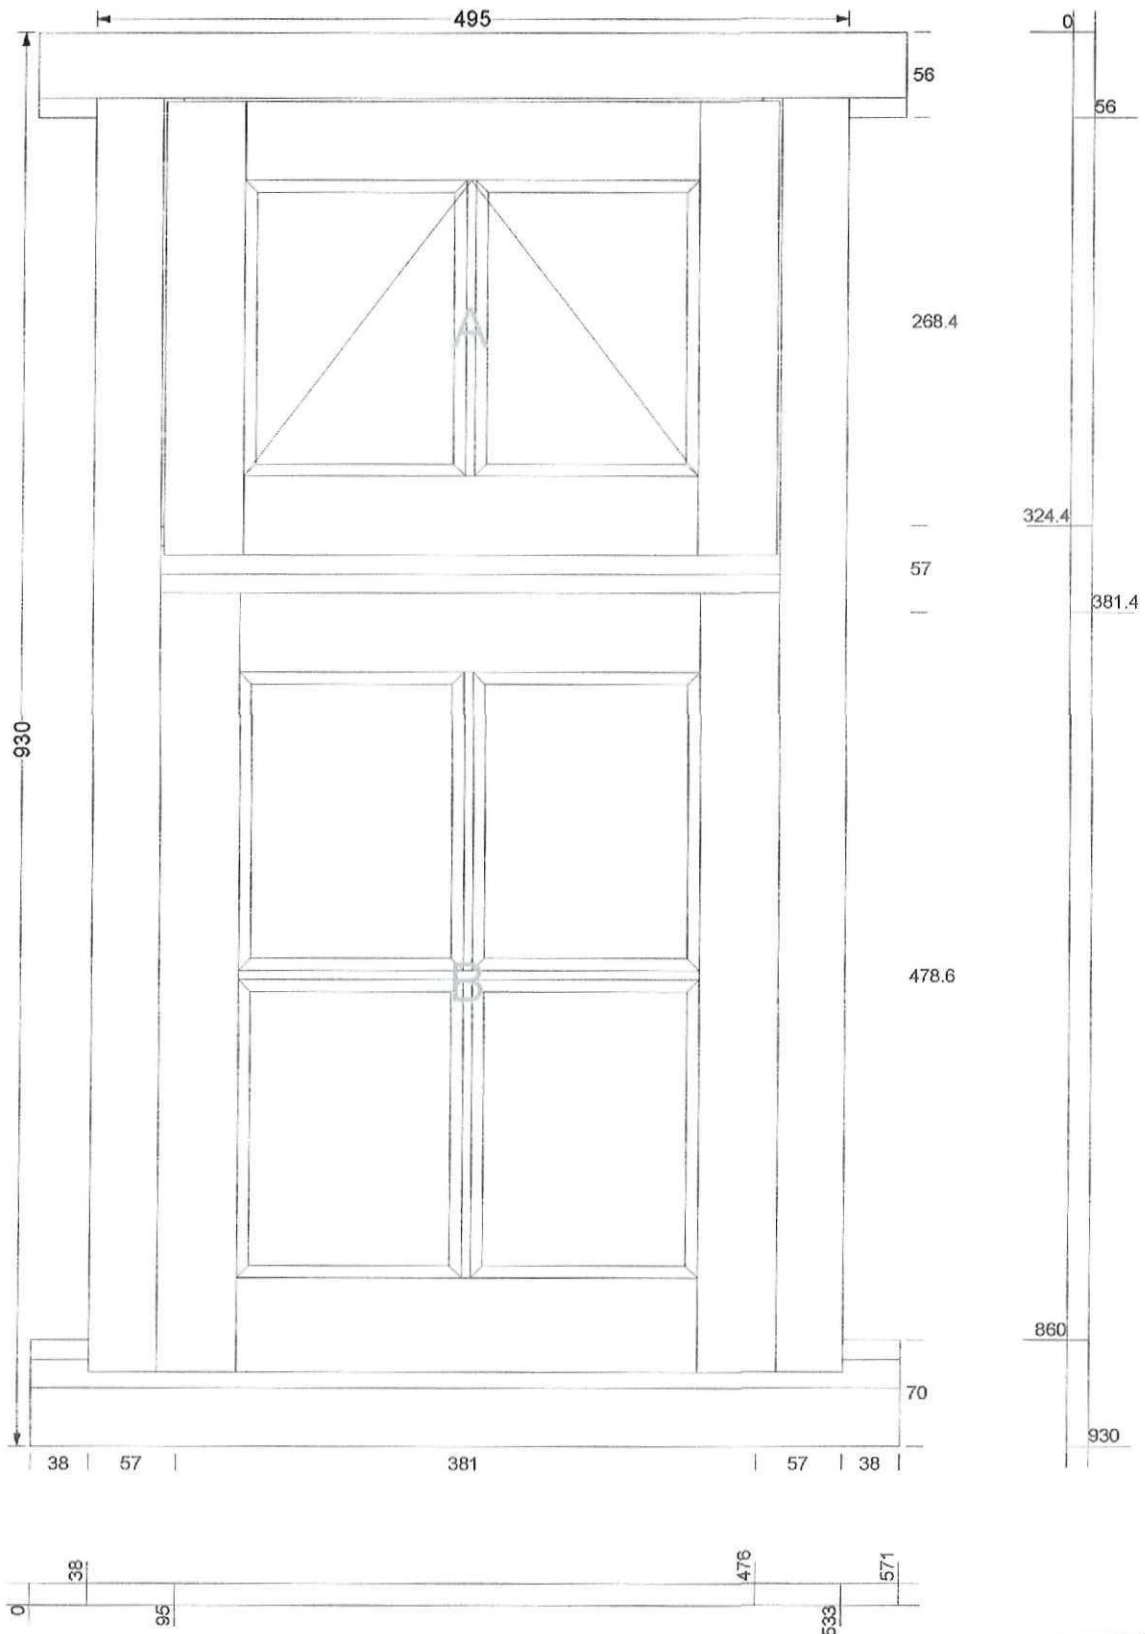

Window - (W4)

Bath 3 Panes High

92mm Deep Frame, 25mm Stub Cill only, Ovolo Moulded 44mm, Flush

Casements rebated for single glazing and putty, Brass Butt Hinges.

Timber - Softwood Vac Vac Treated.

Rebated for Single Glass 6mm Laminated Obscure

SHDC
PLANNING & DEVELOPMENT

16 JAN 2012

Ref. 0031-12

Job number


AS1564

09:30 4-01-12

4 of 5

Side Bed 2

1 X Window - W3

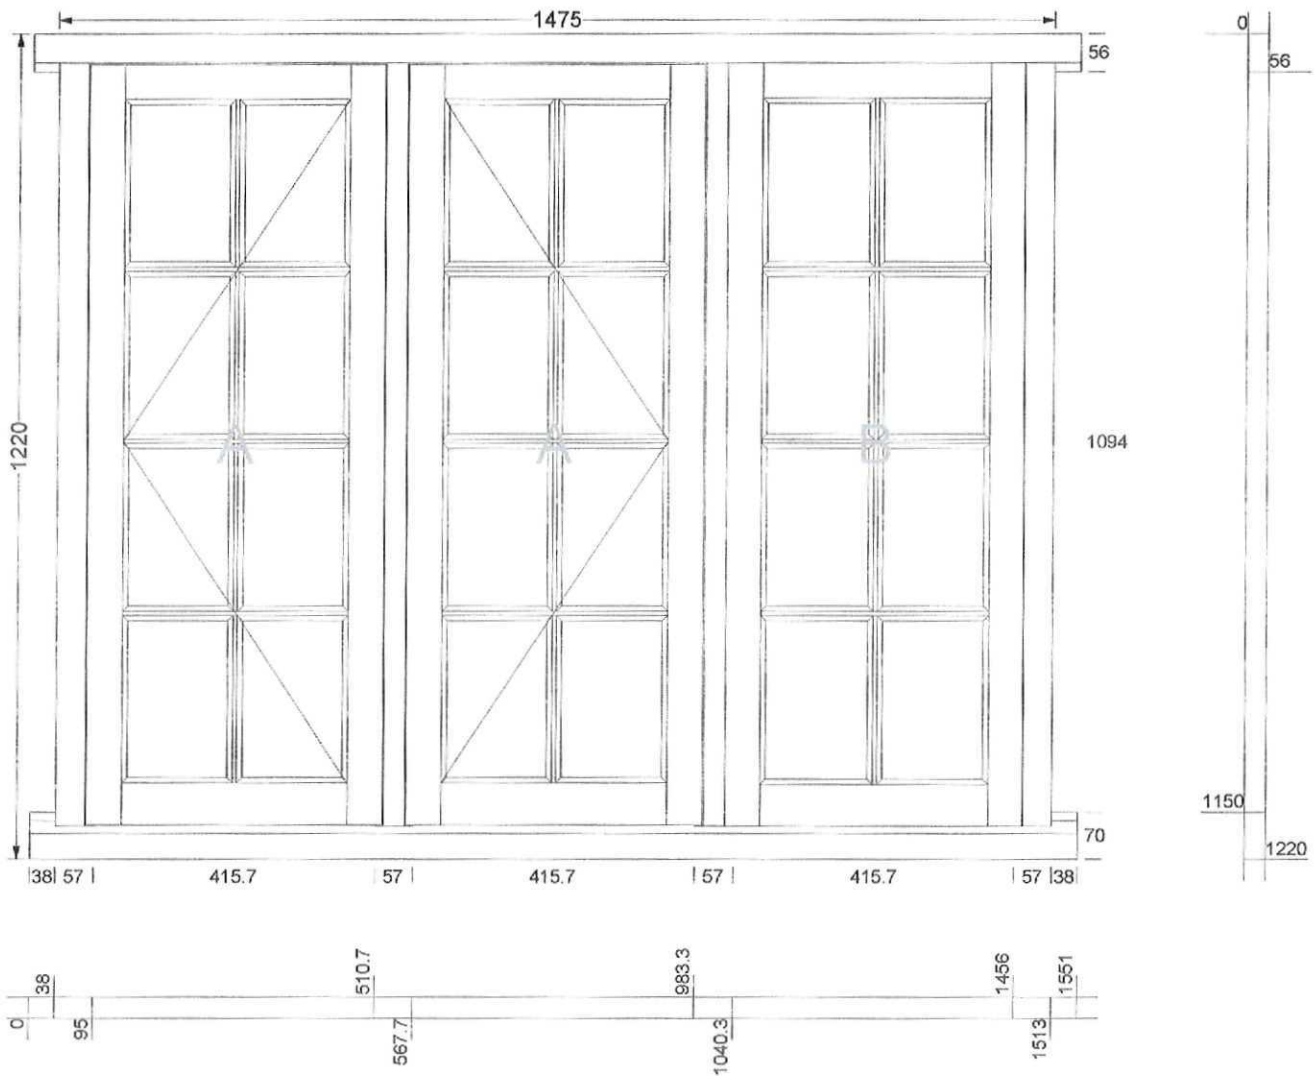

Window - (W3)

Side Bed 4 Panes High *With flying Mullion for Fire Escape*
 92mm Deep Frame, 25mm Stub Cill only, Ovolo Moulded 44mm, Flush
 Casements rebated for single glazing and putty, Brass Butt Hinges.
 Timber - Softwood Vac Vac Treated.
 Rebated for Single Glass 6mm Laminated


This Window includes a Fire Safety Egress Hinge which is known
 as a flying Mullion.

A mullion is a vertical frame member onto which the casements close. A flying mullion is a mullion that is an integral part of one of the casements so that, when both casements are open, you have a clear and unobstructed view of the outside. When closed, it resembles a standard casement window and locks into place to give the same appearance as a conventional mullion



Back Bath

1 X Window - W2

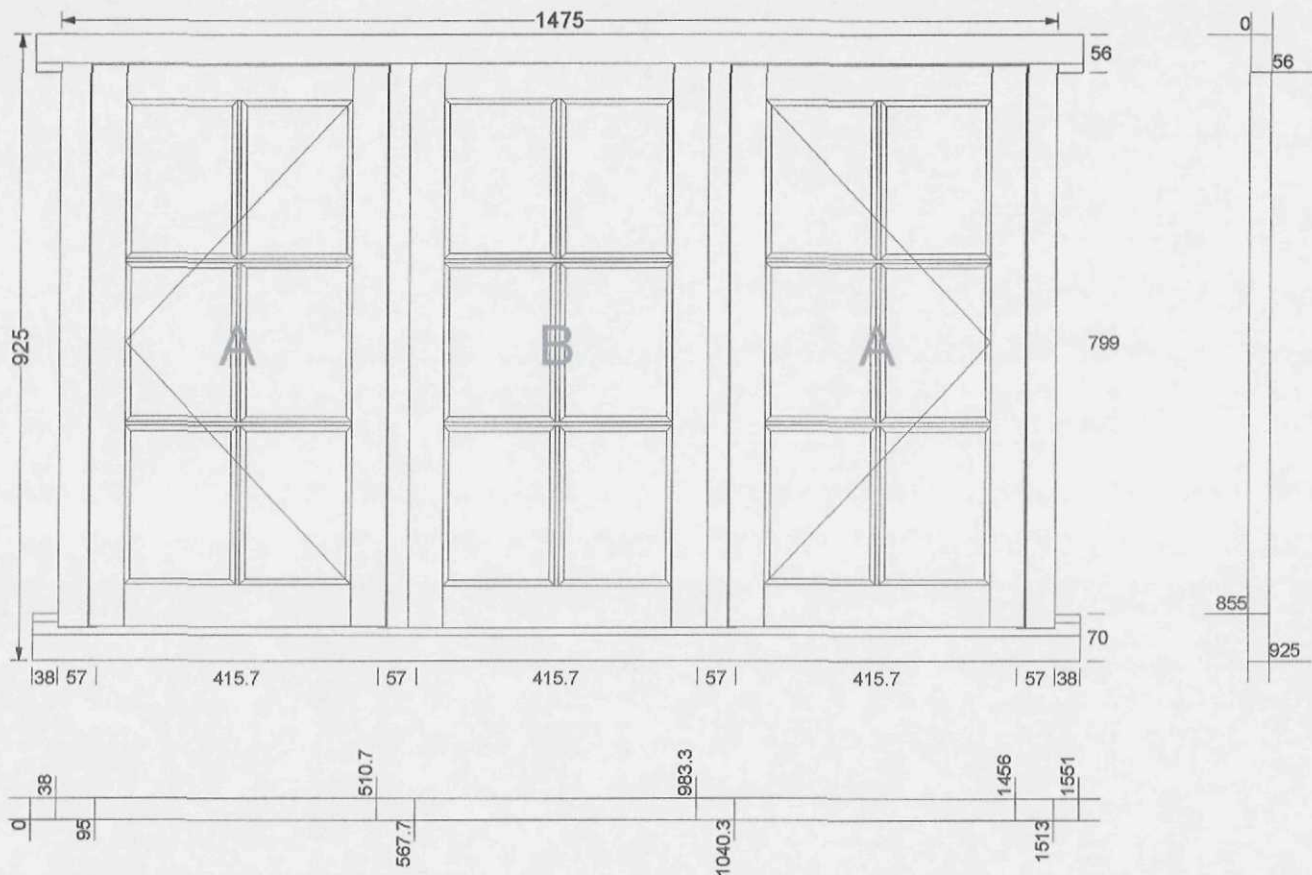

Window - (W2)

Back Bath 3 Panes High
 92mm Deep Frame, 25mm Stub Cill only, Ovolo Moulded 44mm, Flush
 Casements rebated for single glazing and putty, Brass Butt Hinges.
 Timber - Softwood Vac Vac Treated.
 Rebated for Single Glass 6mm Laminated Obscure


SHDC
 PLANNING & DEVELOPMENT

1-6 JAN 2012

Ref. 0031-12

Back Bed

1 X Window - W1

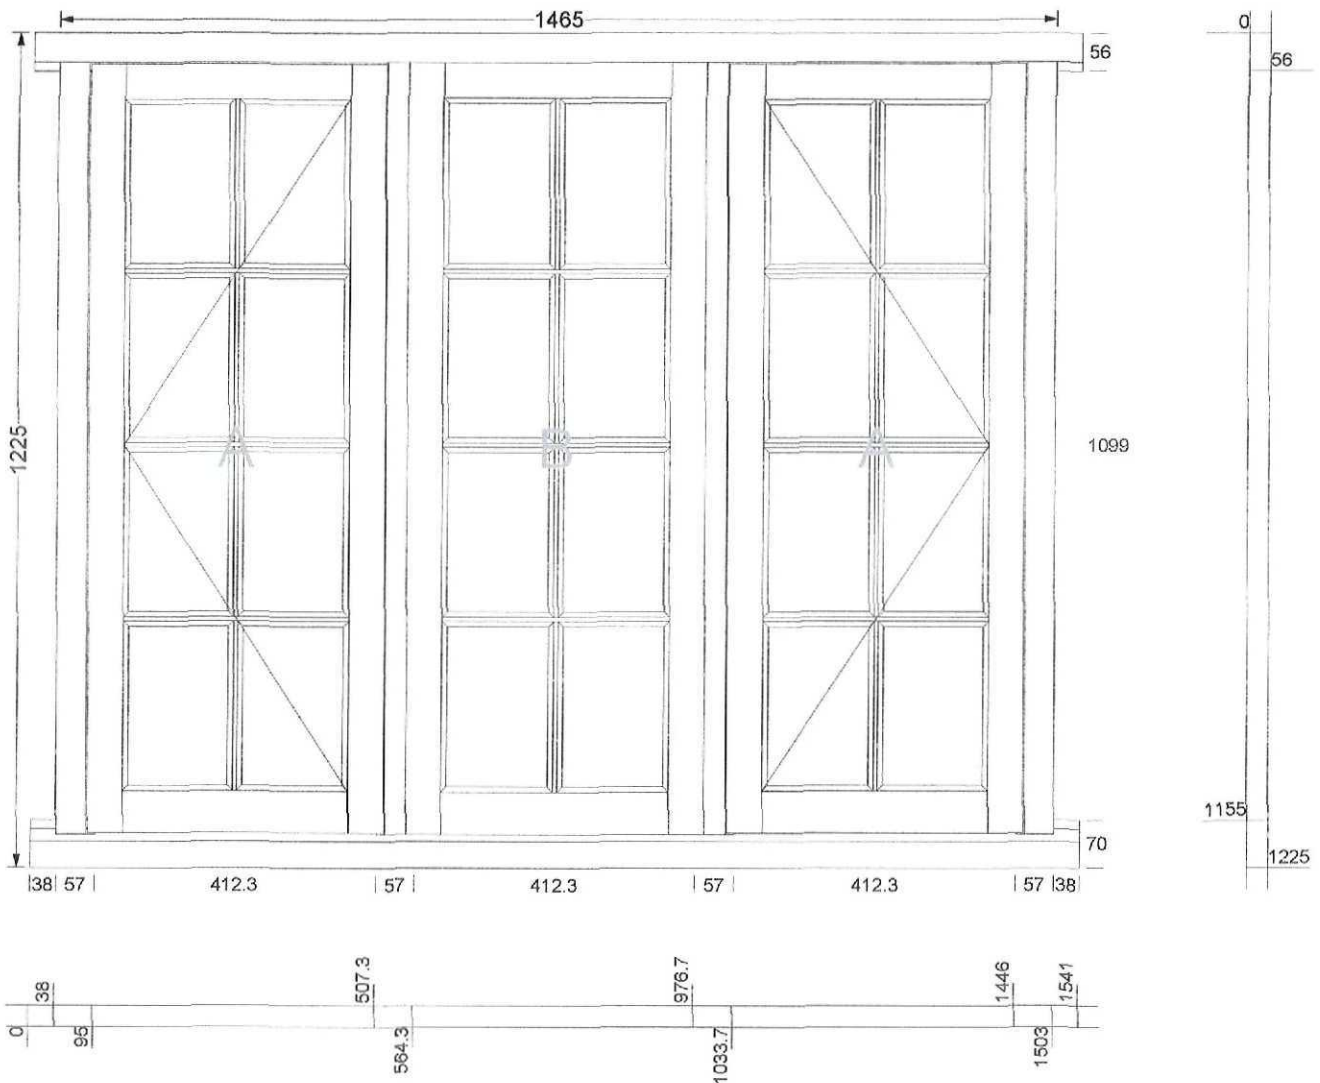

Window - (W1)

Back Bed 4 Panes High

92mm Deep Frame, 25mm Stub Cill only, Ovolo Moulded 44mm, Flush Casements rebated for single glazing and putty, Brass Butt Hinges.

Timber - Softwood Vac Vac Treated.

Rebated for Single Glass 6 mm Laminated

