


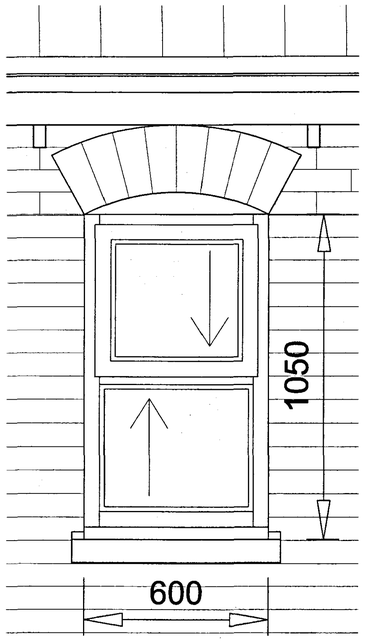
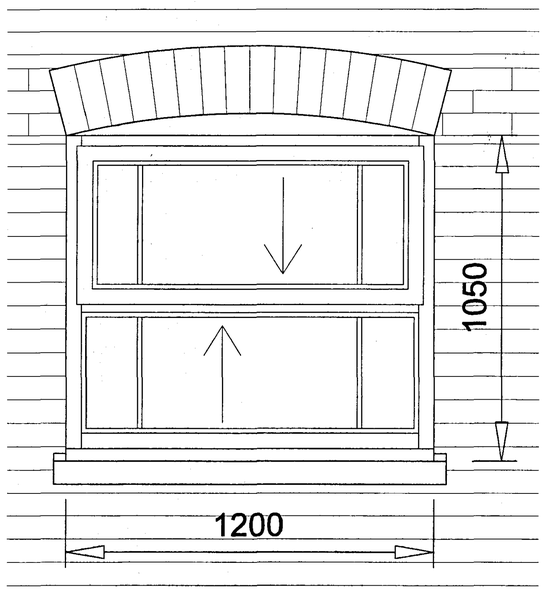


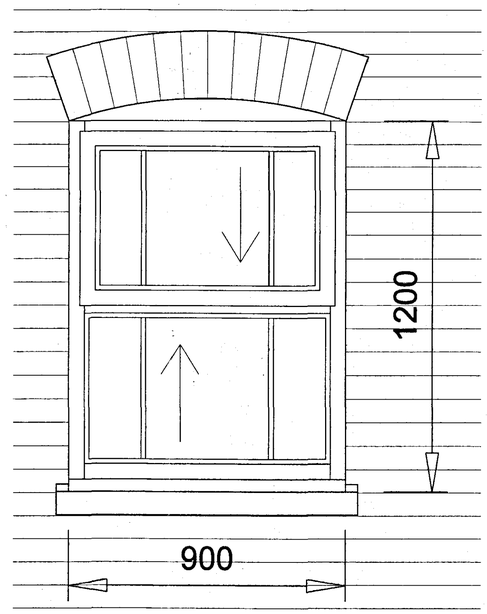


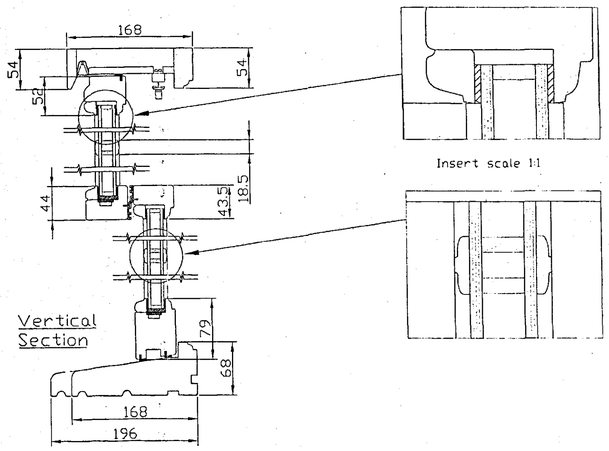

SCALE 1: 4

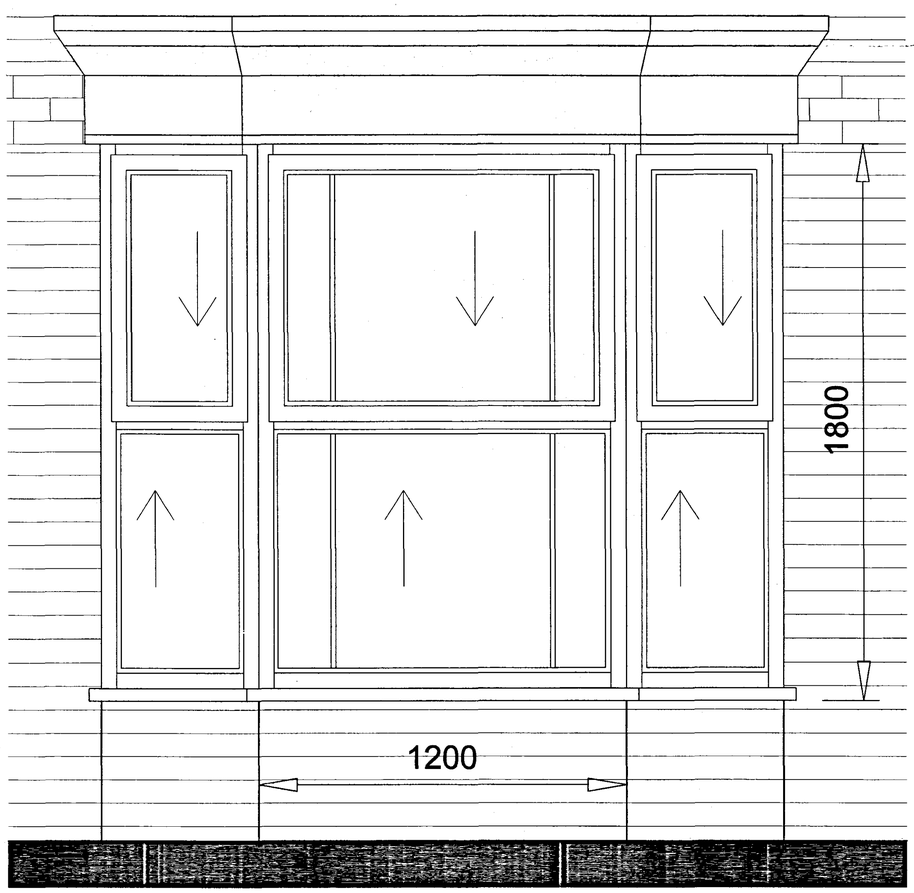


## SLIDING SASH WINDOWS

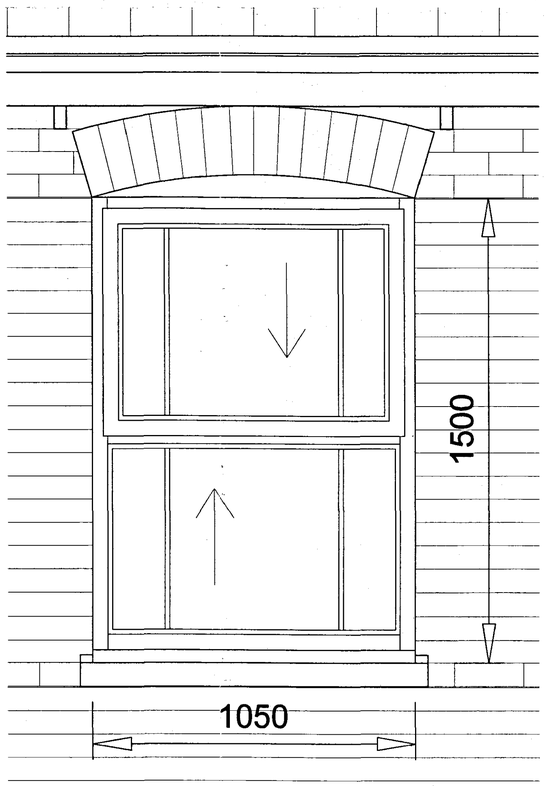SPECIFICATION:

CONSTRUCTION - MECHANICALLY JOINTED FRAMES, COMB JOINTED SASHES

TIMBER - EUROPEAN REDWOOD

MOISTURE CONTENT - 16% (+ OR - 3%) IN ACCORDANCE WITH BS EN 942

GLAZING - SLIDING SASH WINDOWS MADE TO ACCEPT 24mm DOUBLE GLAZED UNITS (4-16-4) GLASS WITH LOW E CONSTRUCTION AND ARE FACTORY GLAZED AS STANDARD

U VALUE - TYPICAL APPROXIMATE U VALUE 1.8 W/m²K OR LOWER

WEATHER TEST - TO BS 6375: PART 1

WEATHER STRIP - FULLY WEATHER-STRIPPED AS STANDARD

IRONMONGERY - ALL WINDOWS TO HAVE SECURITY INTERLOCKS WHERE SASHES MEET WITH A KEY LOCKABLE FITCH CATCH FITTED AS STANDARD

TRICKLE VENT - AS PER WINDOW SCHEDULE

| | | |
|---|---|---|
| SECTION SIZES - CILL | | 170 x 56mm (OPTIONAL 196mm) |
| | JAMBS | 170 x 65mm (PVCu JAMB LINER FACED WITH TIMBER) |
| | HEAD | 170 x 68mm |
| | MULLION | 170 x 130mm (TWO JAMBS 'MULLED' TOGETHER) |
| | SIMULATED GLAZING BAR | |
| | | 5 x 18.5mm |
| | GLAZING REB. | 42 x 18mm |
| | SASH STILES | 56 x 66mm |
| | | 56 x 39mm |
| | SASH RAILS | 55 x 52mm (TOP) |
| | | 55 x 78mm (BOTTOM) |
| | | 55 x 44mm (MEETING) |
| | TOP BEAD | 10 x 18mm |
| | SIDE BEAD | 15 x 19mm |
| | BOTTOM BEAD | 10 x 18mm |

SHDC
Planning & Development
13 MAR 2008
Ref: 0336/08

Revisions

Preliminary | For Construction

David Trundley Design Services

Chartered Institute of Architectural Technologists

Salgate Barn, Islington Road, Tilney All Saints, King's Lynn, Norfolk. PE34 4RY
Tel: 01553 617700 Fax: 01553 617874 Email: enquiries@dtrundleydesign.co.uk

Project Title:

**LIBRARY**
LONG SUTTON
LINCS

PROPOSED REDEVELOPMENT OF EXISTING LIBRARY BUILDING AND EXTERNAL AREAS.

Drawing Title:

PROPOSED WINDOW ELEVATIONS AND DETAILS

| Scale: | Date: | Drawn: |
|---|---|---|
| 1:10, 1:4 | 10.02.08 | SJ |

Drawing Number:

**06-110-30**

Copyright:
This drawing must not be re-issued, loaned or copied without the consent of David Trundley Design Services Limited. Do not scale this drawing, use only figured or grid dimensions. All dimensions to be checked by contractor on site prior to start of works. Any discrepancies are to be notified