
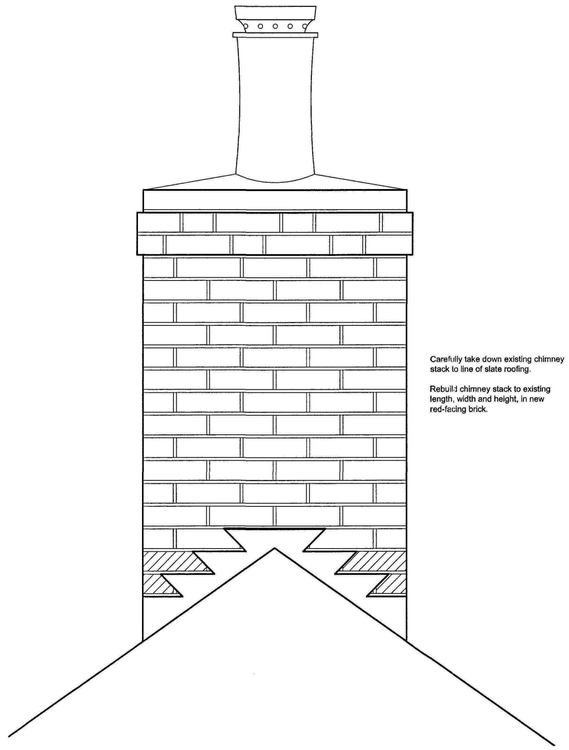


Carefully take down existing chimney stack to line of slate roofing.

Rebuild chimney stack to existing length, width and height, in new red-facing brick.

ELEVATION C-C

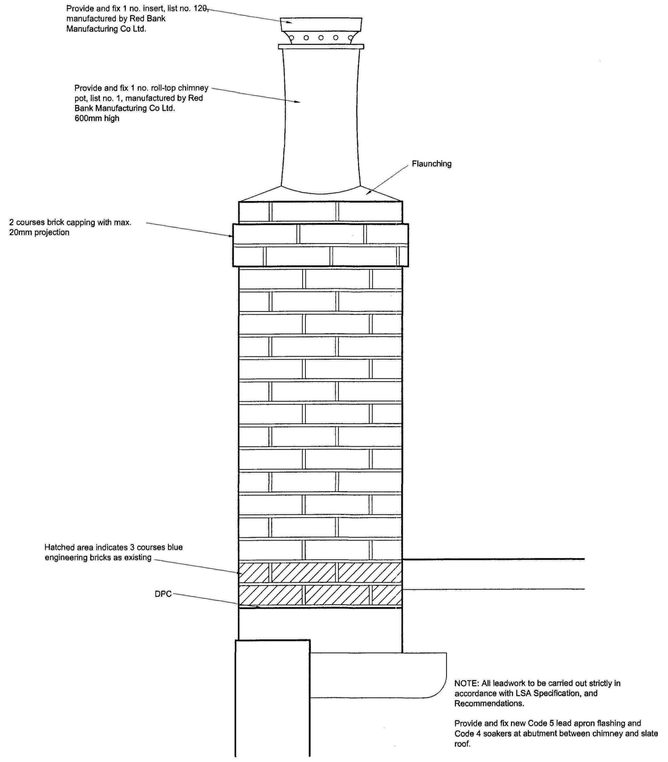


NOTE: All leadwork to be carried out strictly in accordance with LSA Specification, and Recommendations.


Provide and fix new Code 5 lead apron flashing and Code 4 soakers at abutment between chimney and slate roof.

ELEVATION A-A

NOTE: Photographic and dimensional record of existing chimney to be made prior to taking down

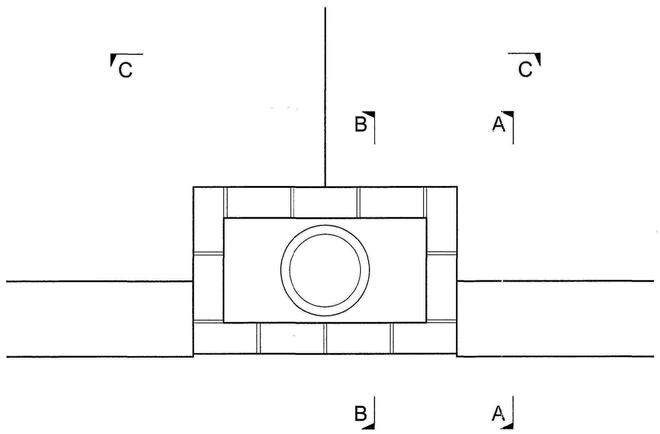

PLAN

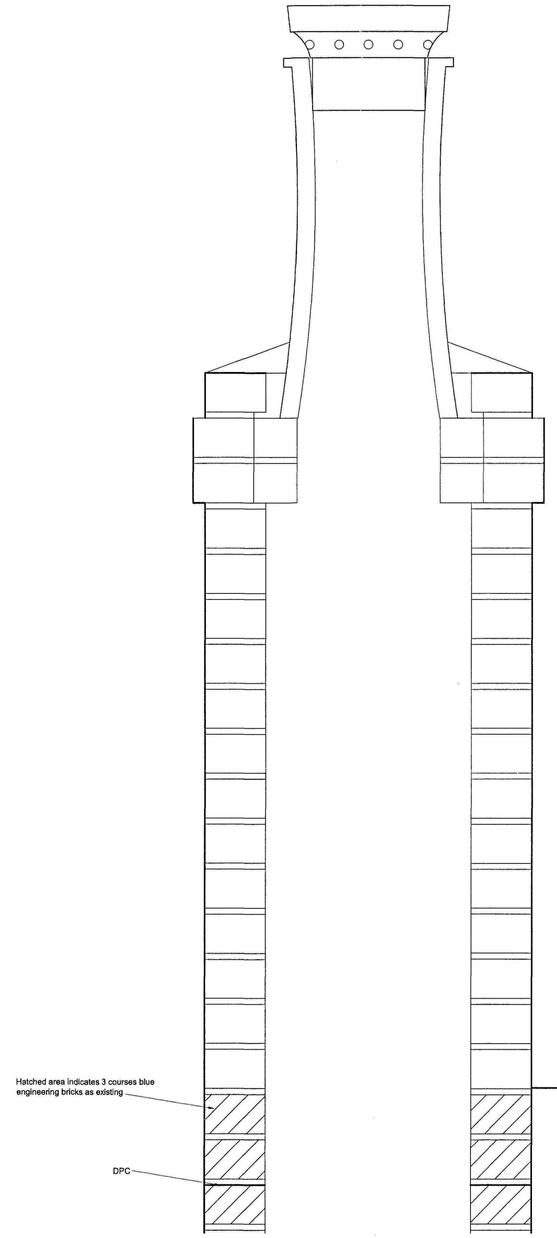

SECTION B-B

SHDC
Planning & Development
14 MAY 2010
Ref: 0411-10


OFFICE COPY


				REV:	DATE:
JOB TITLE: 25 MARKET PLACE LONG SUTTON					SCORER & HAWKINS
DRAWING TITLE: SOUTH GABLE CHIMNEY STACK DETAILS AS PROPOSED					
SCALE: 1:5, 1:10	DATE: 23.03.10	DRAWING No: 2125/10	REV:		20 Banks Street, Horncastle, Lincs LN9 5BW Telephone 01507 524556 Fax 01507 524300 Email scorerhawkins@aol.com

© Copyright Reserved Drawing not to be scaled Dimensions to be checked on site


NOTE: All leadwork to be carried out strictly in accordance with LSA Specification, and recommendations.

Carefully strip existing lead flashings and remove from site. Provide and fix new Code 5 lead sheet covering to projecting bay roof, with Code 4 lead flashings at abutment with brick wall.

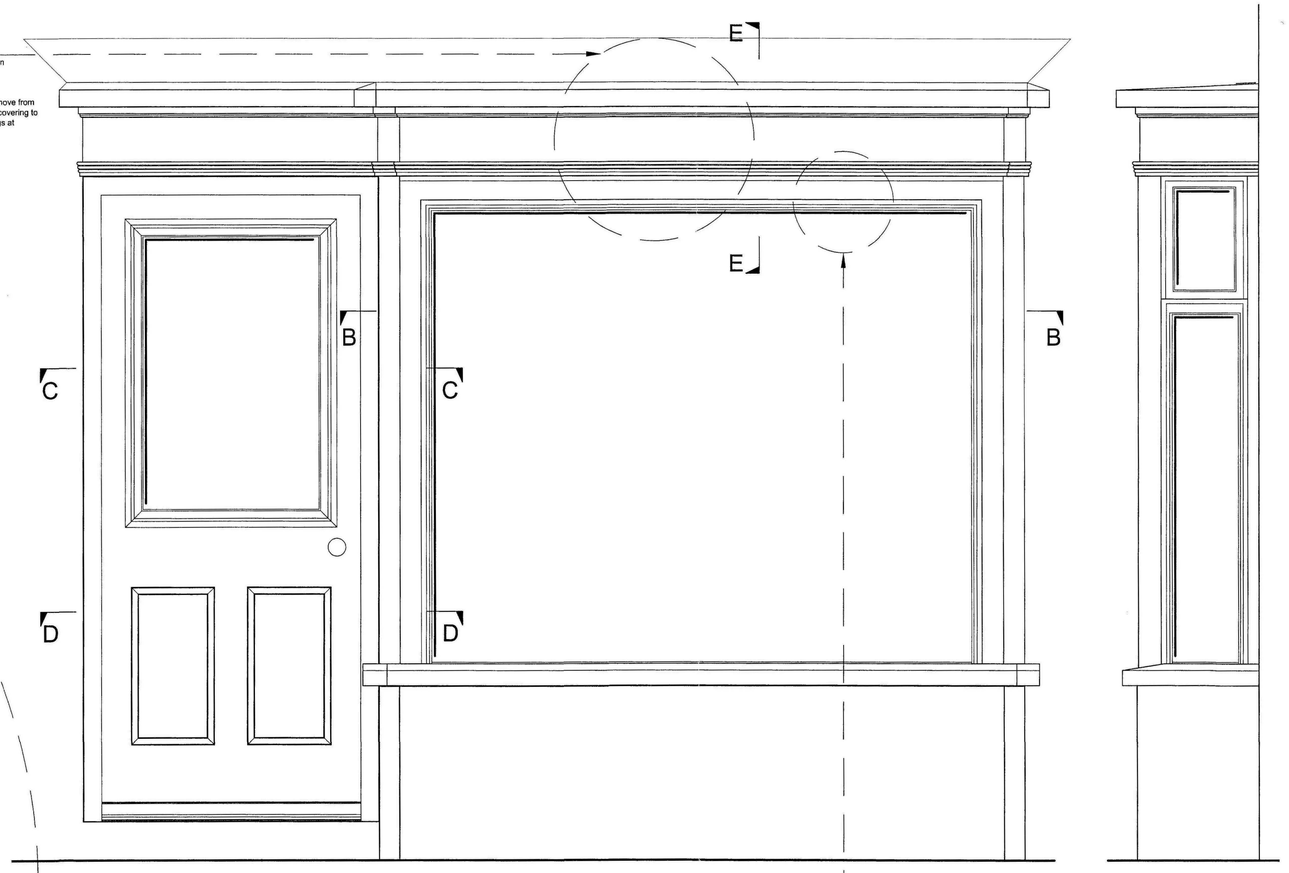

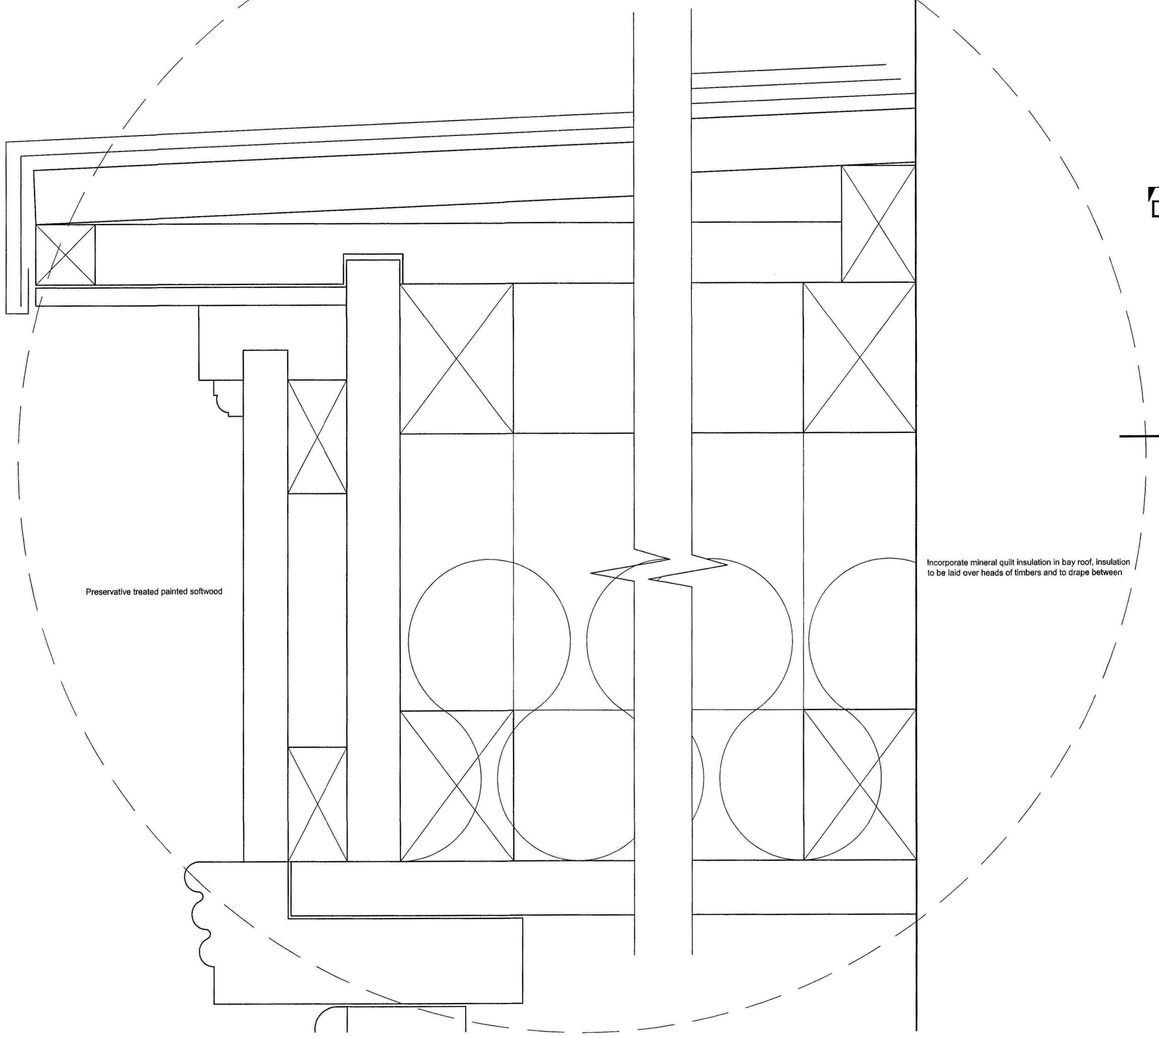

SECTION E-E

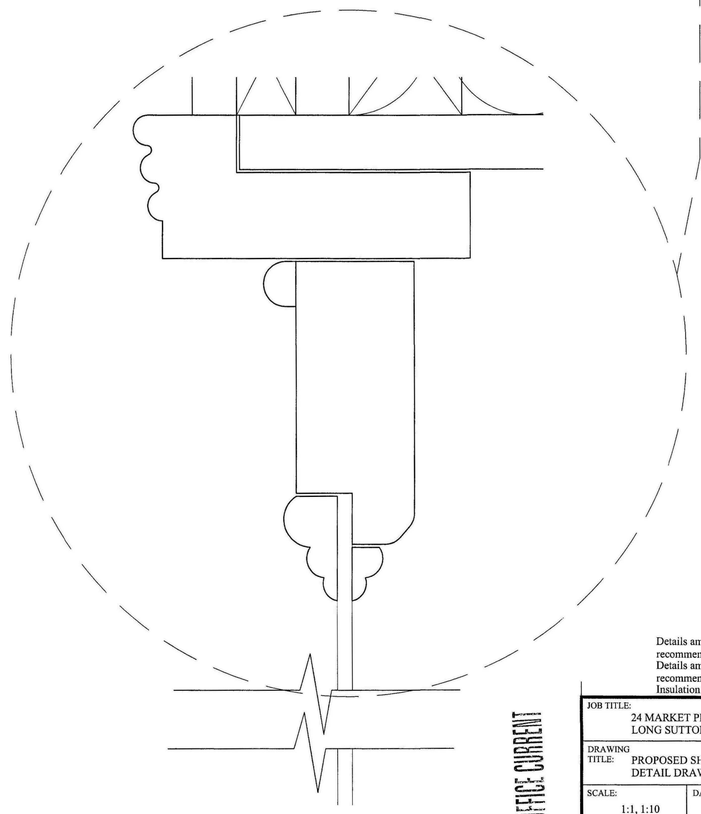

SHDC Development Control
14 MAY 2010
Ref: 0411-10

OFFICE COPY

Details amended as per Liz Mayle recommendations	C	06.05.10
Details amended as per Liz Mayle recommendations	B	17.03.10
Insulation shown within bay roof	REV: A	DATE: 02.03.10


JOB TITLE: 24 MARKET PLACE, LONG SUTTON


DRAWING TITLE: PROPOSED SHOP FRONT BAY ROOF DETAIL DRAWINGS

SCALE:	DATE:	DRAWING No:	REV:
1:1, 1:10	18.02.10	2125/09	C


SCORER & HAWKINS
20 Banks Street, Horncastle, Lincs LN9 5BW
Telephone 01507 524556 Fax 01507 524300
Email scorerhawkins@aol.com

© Copyright Reserved Drawing not to be scaled Dimensions to be checked on site

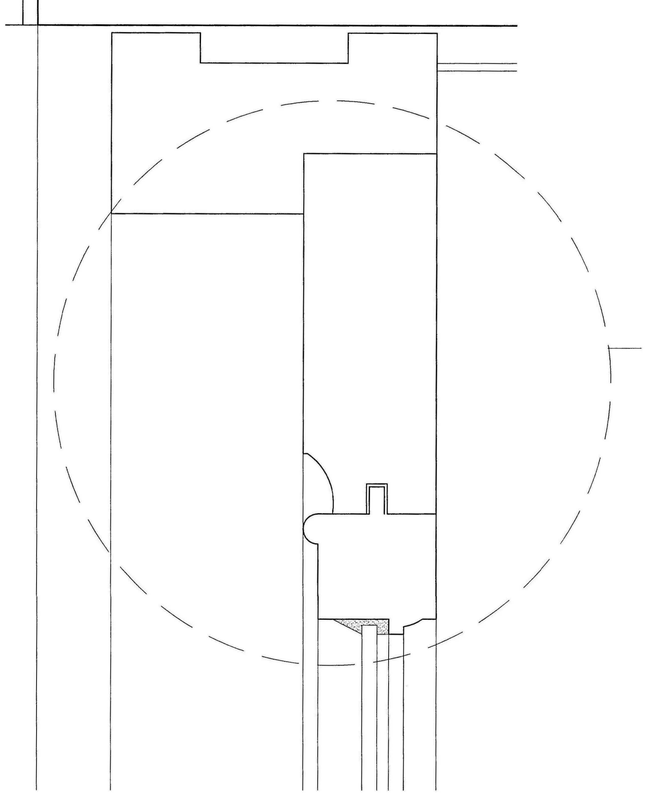

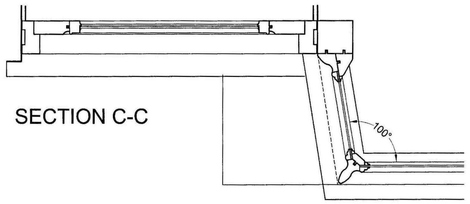



SECTION C-C

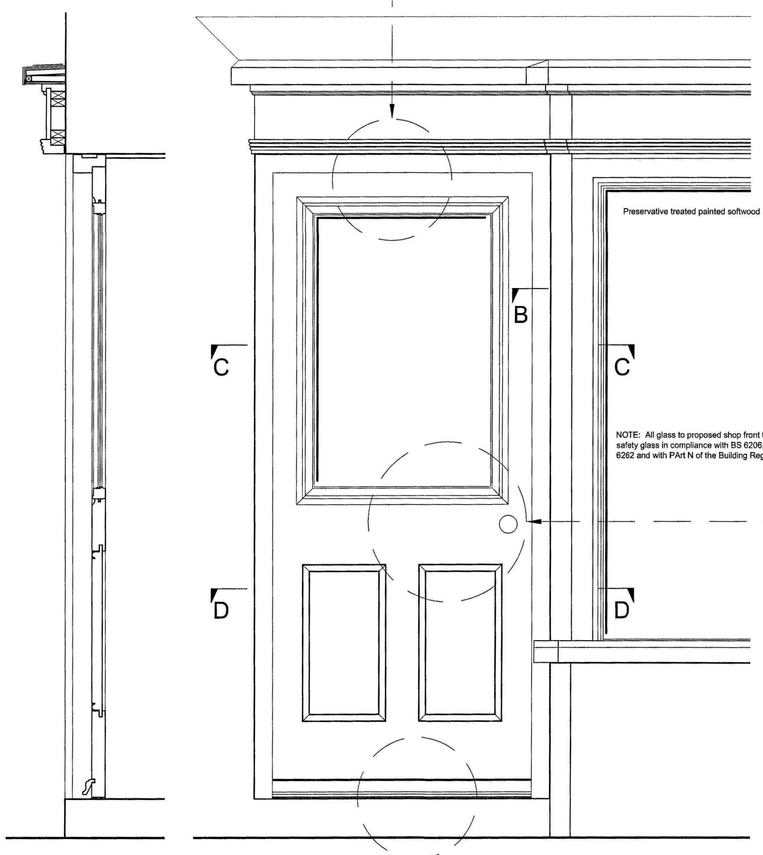


Preservative treated painted softwood

NOTE: All glass to proposed shop front to be laminated safety glass in compliance with BS 6206, 1981 and BS 6262 and with PArt N of the Building Regulations.

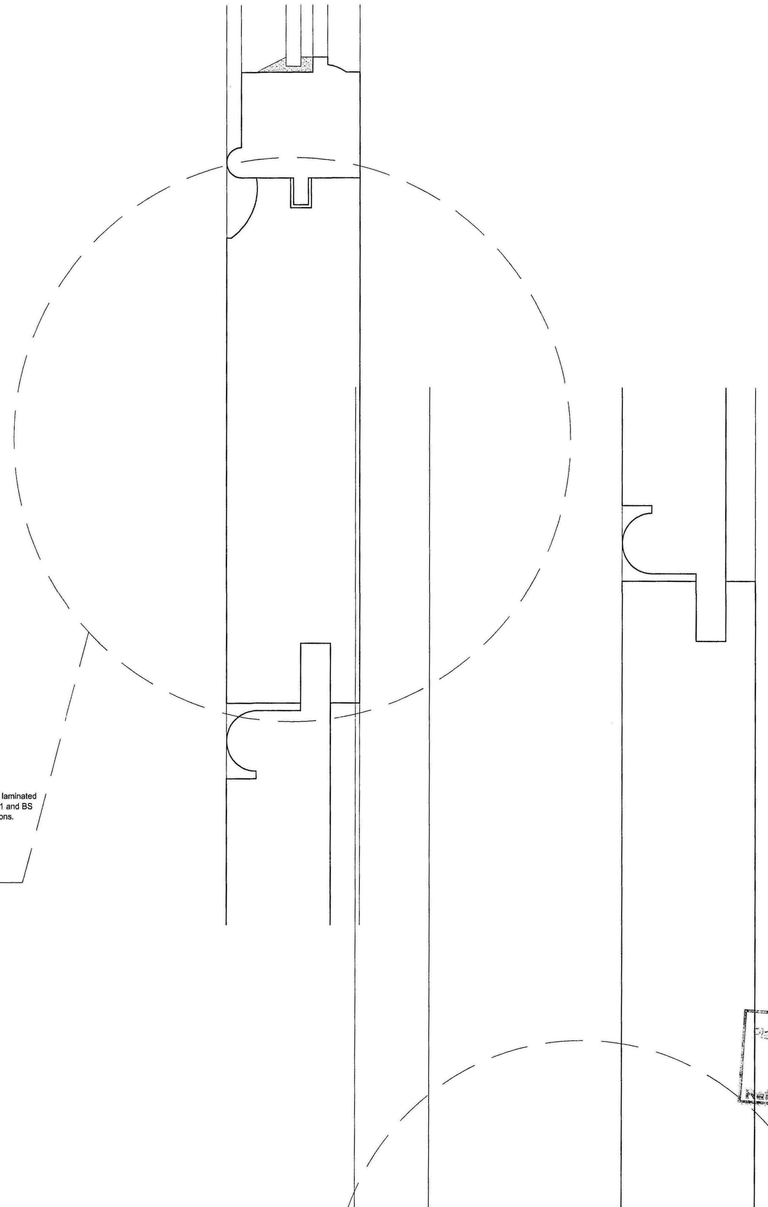

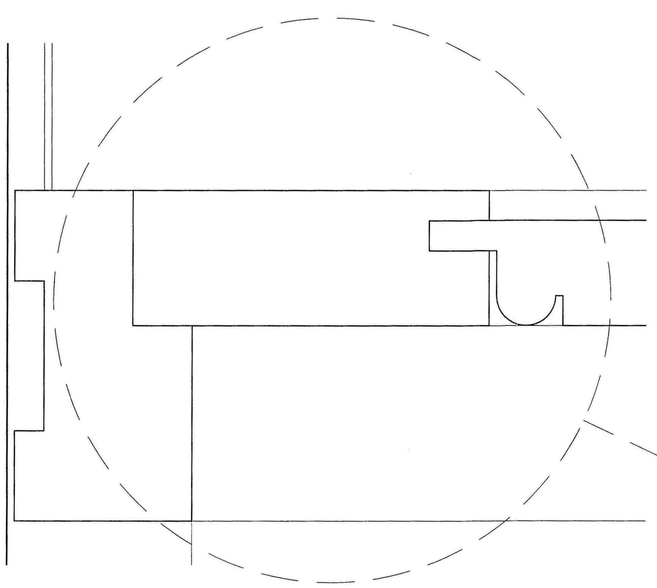

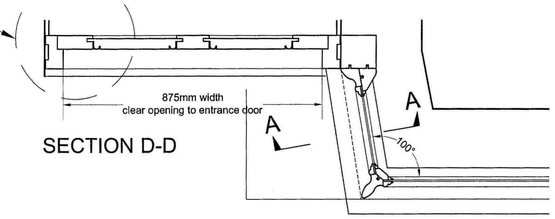

SECTION D-D

SHDC
Planning & Development
14 MAY 2010
Ref: 0411-10

Details amended as per Liz Mayle recommendations	C	06.05.10
Details amended as per Liz Mayle recommendations	B	17.03.10
Opening dimension added and threshold detail altered	REV: A	DATE: 02.03.10

OFFICE COPY NOT CURRENT


JOB TITLE: 24 MARKET PLACE, LONG SUTTON

DRAWING TITLE: PROPOSED SHOP FRONT DOOR DETAIL DRAWINGS


SCALE:	DATE:	DRAWING No:	REV:
1:1, 1:10	18.02.10	2125/08	C

SCORER & HAWKINS
20 Banks Street, Horncastle, Lincs LN9 5BW
Telephone 01507 524556 Fax 01507 524300
Email scorerhawkins@aol.com


© Copyright Reserved Drawing not to be scaled Dimensions to be checked on site

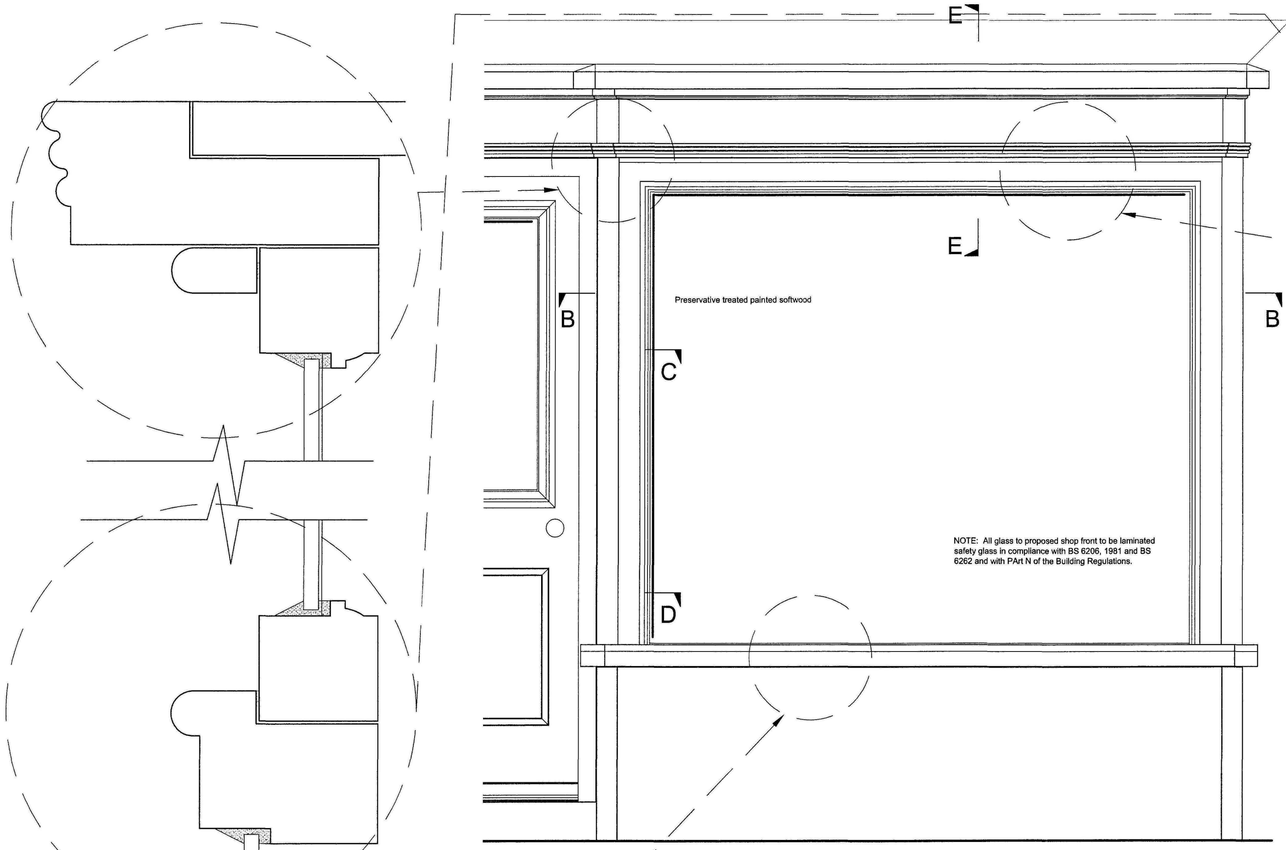


EAST ELEVATION

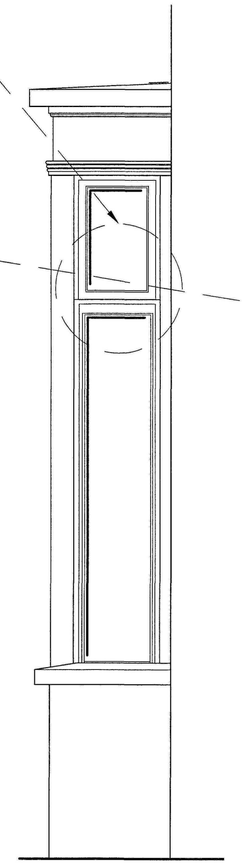

NORTH ELEVATION

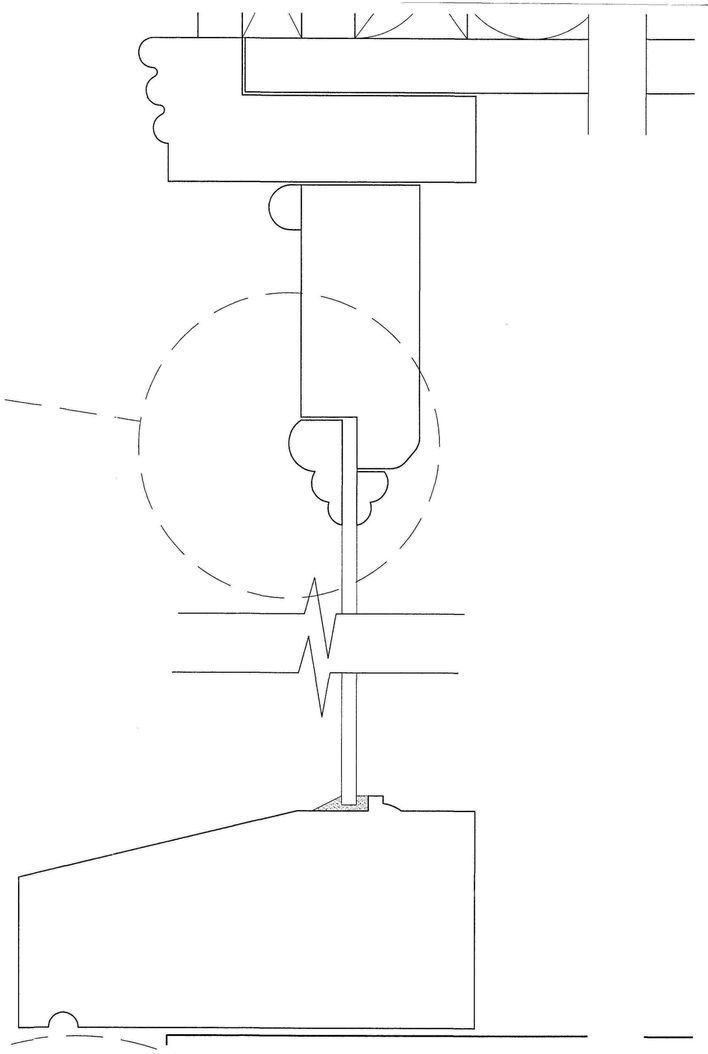


SECTION A-A

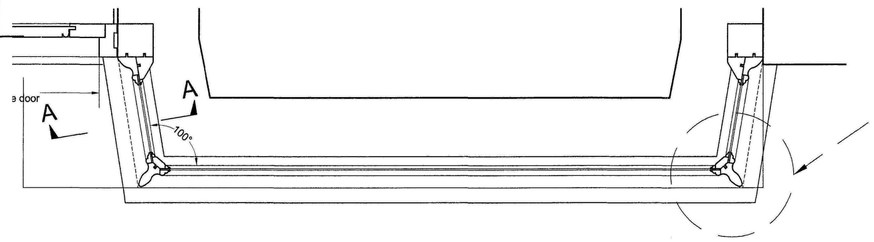

PLAN SECTION B-B

FOUNDATIONS FOR PROPOSED BAY
All foundations to be 600mm wide , 225mm deep mass concrete strip foundations . All to Local Authority approval and to suit site conditions . Foundation depth to be min. 1000mm below local ground level.

FLOOR CONSTRUCTION FOR PROPOSED BAY
Proposed solid ground floor construction within area of new bay (NOTE: Finished floor level to coincide with existing finished floor level).
50mm sand/cement screed laid on 100mm concrete slab on 500 gauge vapour check barrier laid over 80mm Celotex Tuff-RFF 3000 insulation on 1200 gauge DPM laid on 50mm sand blinding. U-value 0.22 W/m²k.
Insulation to be taken up side of concrete clab at perimeter and DPM to be lapped and integral with DPC.

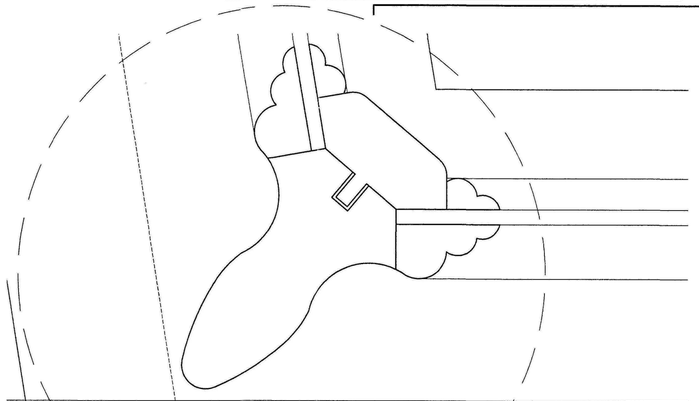

SHDC
Development
18 MAY 2010
2411-10

REV:	DATE:	
D	06.05.10	Details amended as per Liz Mayle recommendations
C	27.04.10	Details amended as per Liz Mayle recommendations
B	17.03.10	Details amended as per Liz Mayle recommendations
A	02.03.10	Notes included regards floor and fdn. construction

OFFICE COPY


JOB TITLE: 24 MARKET PLACE, LONG SUTTON

DRAWING TITLE: PROPOSED SHOP FRONT BAY WINDOW DETAIL DRAWINGS

SCALE:	DATE:	DRAWING No:	REV:
1:1, 1:10	18.02.10	2125/07	D


SCORER & HAWKINS
20 Banks Street, Horncastle, Lincs LN9 5BW
Telephone 01507 524556 Fax 01507 524300
Email scorerhawkins@aol.com


© Copyright Reserved Drawing not to be scaled Dimensions to be checked on site

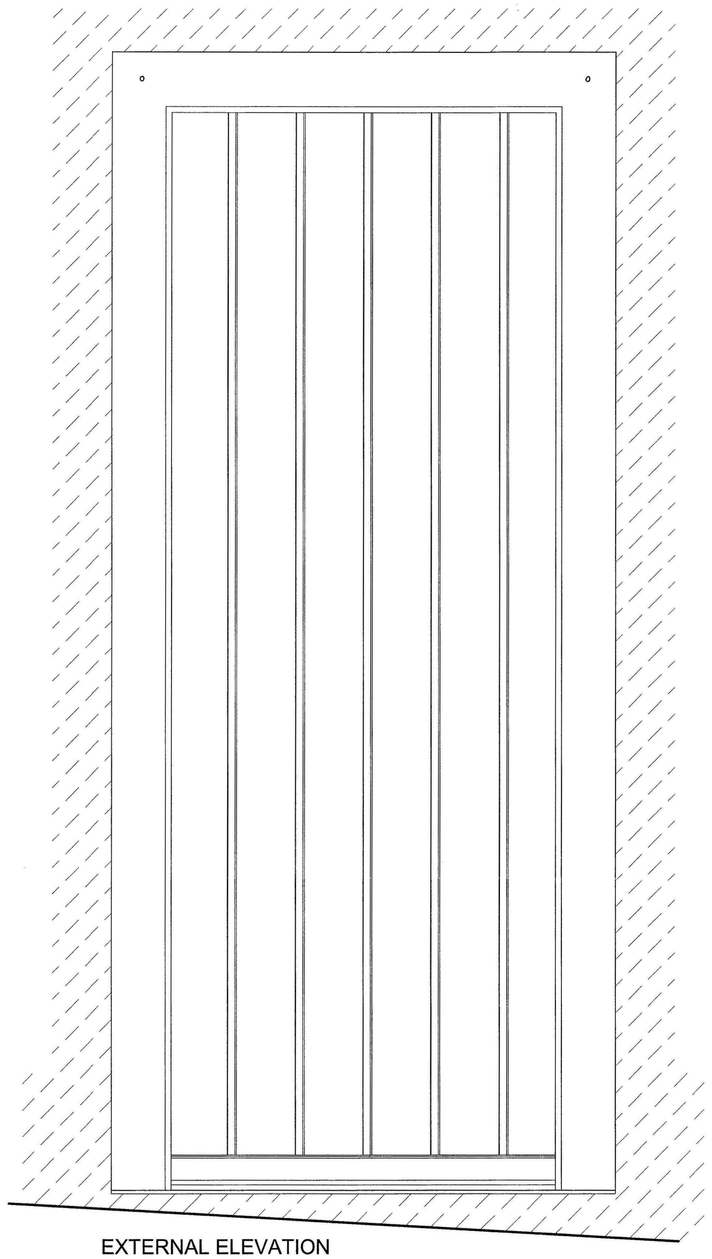


EXTERNAL ELEVATION


DG8 carefully remove existing uPVC door and hand back to client. Replace with new timber door

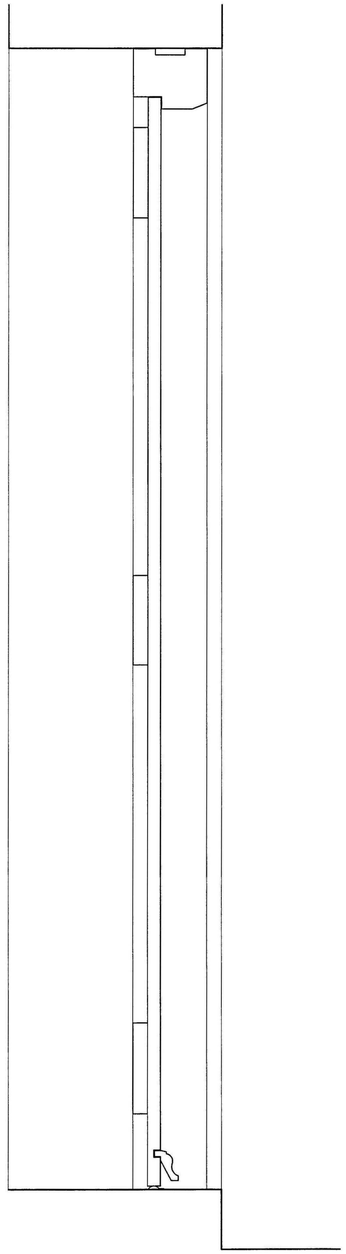


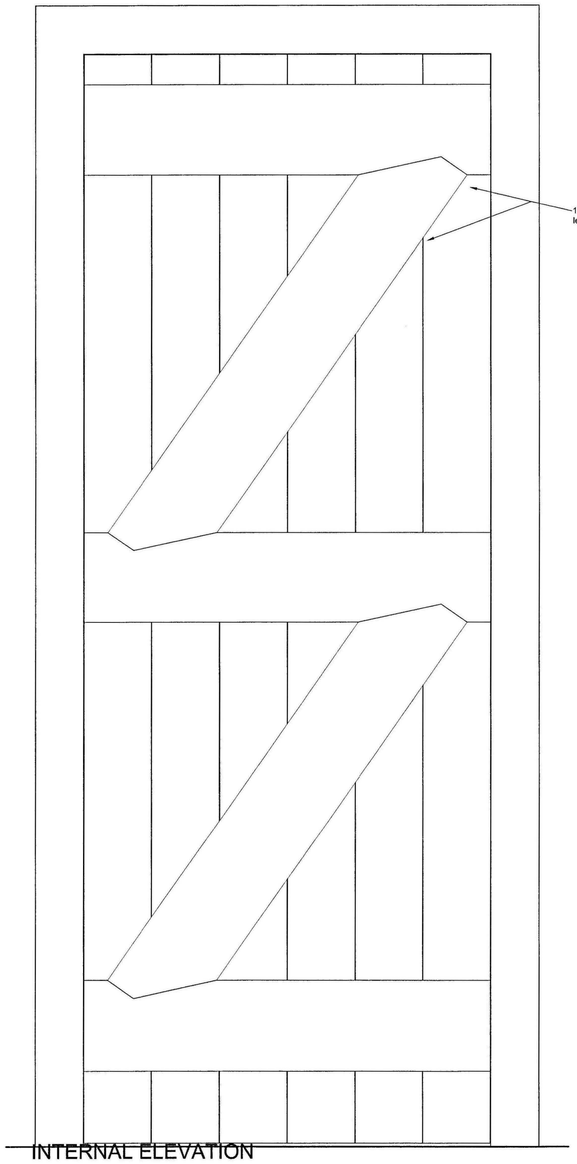

INTERNAL ELEVATION

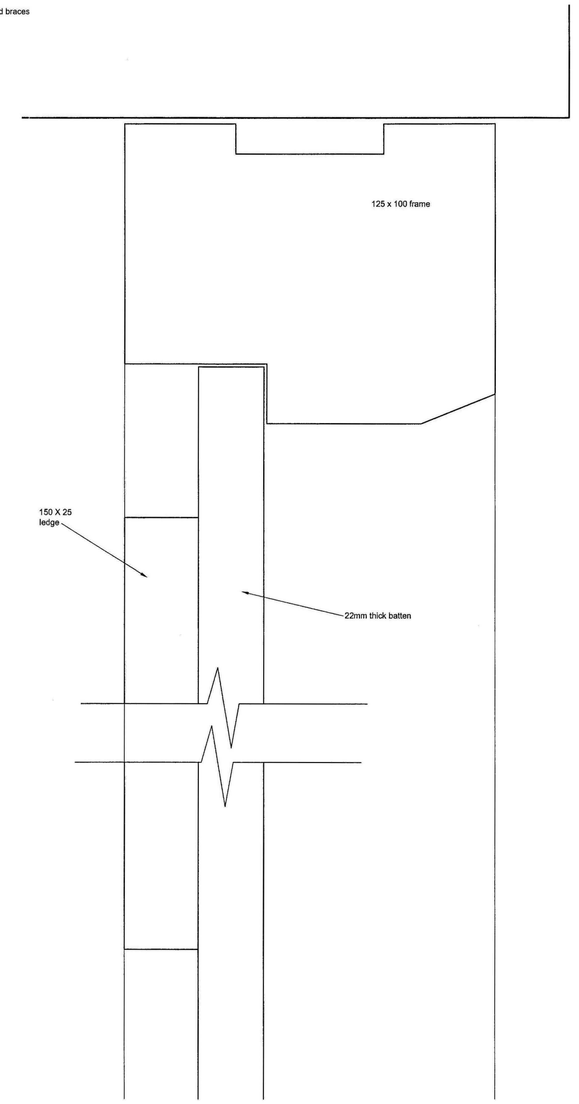

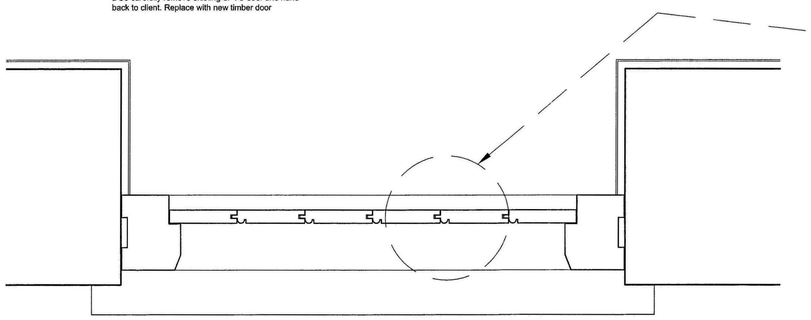

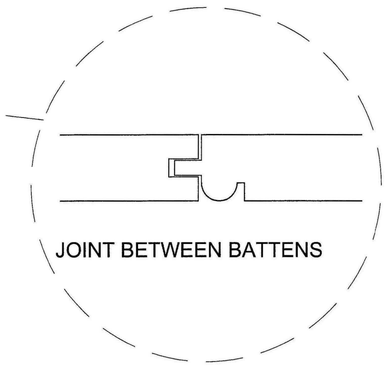


JOINT BETWEEN BATTENS

SHDC
Planning & Development
14 MAY 2010
Ref: 0411-10


OFFICE CURRENT

Shop front amended, further notes added		REV: A	DATE: 30.08.09
JOB TITLE: 24 MARKET PLACE, LONG SUTTON			SCORER & HAWKINS
DRAWING TITLE: DOOR DG8 PROPOSED EXTERNAL DOOR DETAILS			20 Banks Street, Horncastle, Lincs LN9 5BW Telephone 01507 524556 Fax 01507 524300 Email scorerhawkins@aol.com
SCALE: 1:1, 1:5	DATE: 08.02.10	DRAWING No: 2125/06	REV: A


© Copyright Reserved Drawing not to be scaled Dimensions to be checked on site

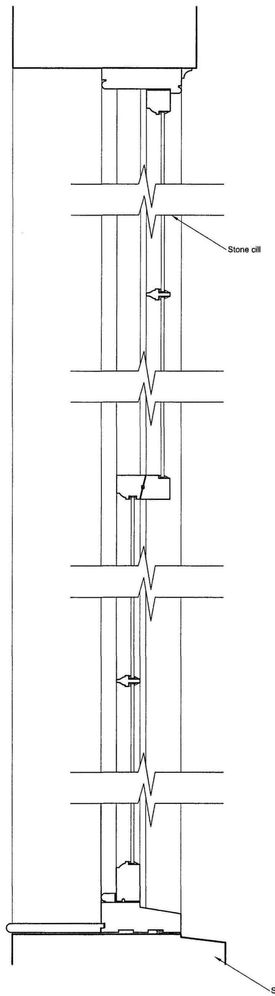


WG2, carefully remove existing uPVC window and hand back to client. Replace with new timber sash window to fit original opening size.

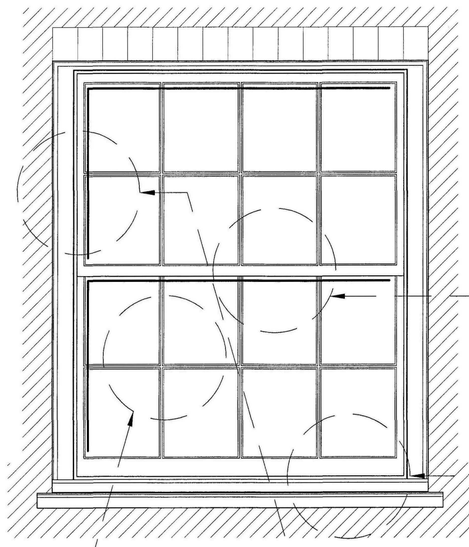

WG2

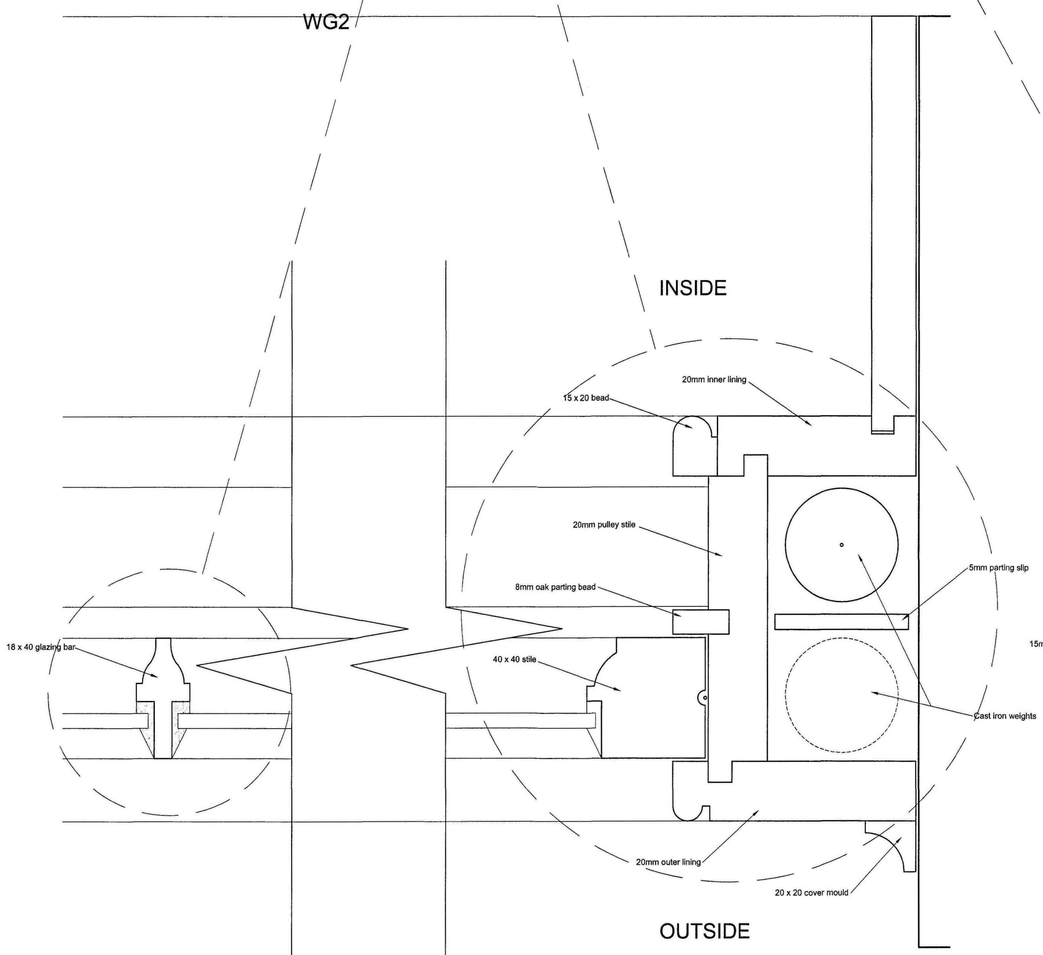

Preservative treated painted softwood

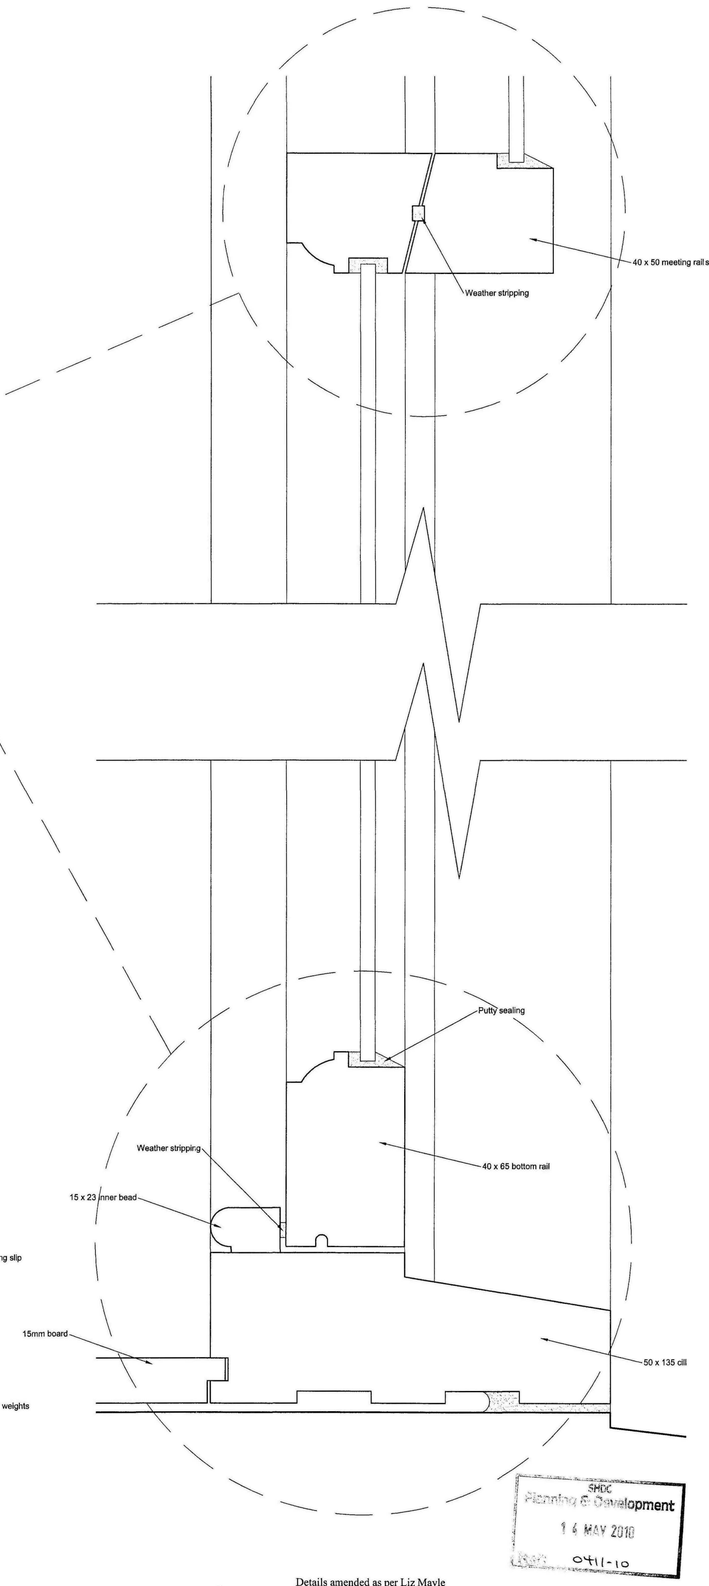

SHDC Planning & Development 16 MAY 2010 0411-10

Details amended as per Liz Mayle recommendations — REV: A — DATE: 17.03.10

JOB TITLE: 24 MARKET PLACE, LONG SUTTON

DRAWING TITLE: WINDOW WG2 PROPOSED SLIDING SASH DETAILS

SCALE:	DATE:	DRAWING No:	REV:
1:1, 1:5, 1:10	08.02.10	2125/05	A

OFFICE COPY

SCORER & HAWKINS
20 Banks Street, Horncastle, Lincs LN9 5BW
Telephone 01507 524556 Fax 01507 524300
Email scorerhawkins@aol.com

© Copyright Reserved Drawing not to be scaled — Dimensions to be checked on site