

GROUND ENGINEERING

Newark Road
Peterborough
PE1 5UA
Tel: 01733 566566
e: admin@groundengineering.co.uk

CONTAMINATION INVESTIGATION REPORT

PEAR TREE FARM
ST JAMES ROAD
LONG SUTTON
LINCOLNSHIRE

Report Reference C15075A

On behalf of:-

Nene Transport (Lincs) Limited
Greenworld Park
Sutton Bridge
Spalding
Lincolnshire
PE12 9RN

September 2020

NENE TRANSPORT (LINCS) LIMITED

ROBERT DOUGHTY CONSULTANCY

CONTAMINATION INVESTIGATION REPORT

FOR

PROPOSED RESIDENTIAL DEVELOPMENT

AT

PEAR TREE FARM

ST. JAMES ROAD

LONG SUTTON

LINCOLNSHIRE

Report Reference No. C15075A

September 2020

INTRODUCTION

The client, Nene Transport (Lincs) Limited, proposes to construct a new large residential dwelling, replacing an existing farmyard and field at Pear Tree Farm, St. James Road, Long Sutton in Lincolnshire. The proposed development layout is presented on a plan following the report text.

Ground Engineering Limited was commissioned by the client, under the direction of Robert Doughty Consultancy, to carry out a contamination investigation to determine the nature and chemical properties of the underlying soils, and provide a contamination assessment report. A desk study including historical and environmental aspects of the site is included within this report. No foundation design recommendations were required within the scope of this report.

LOCATION, TOPOGRAPHY AND GEOLOGY OF THE SITE

The site is located at Pear Tree Farm, St. James Road, Long Sutton in Lincolnshire. The 1.1ha irregular shaped site is approximately 130m long fronting St. James Road to the north, and extends approximately 45m south. The National Grid Reference for the centre of the site is TF 4086 2026 and its location is shown on a plan following this report text.

At the time of the investigation in June 2020, the eastern part of the site contained a concrete surfaced yard area with piles of broken concrete from recent demolition and a couple of brick outbuildings. A demolition contractor's excavator and skip were also present in this area. The western part of the site was generally grassed with occasional mature trees including Horse Chestnut and Ash. Trees and hedgerows were present along the site boundaries, which included Ash, Sycamore and Field Maple amongst others. Overhead power lines cross the extreme western tip of the site.

The site was bounded by St. James Road (B1390) to the north and west; a field to the south; and a meadow with trees to the east. Peartree House fronts St. James Road adjacent the north-eastern corner of the site. Photographs from a site walkover on 15th June 2020 are presented following the plans.

The site stands at about 3mOD, on level ground within the Lincolnshire Fens. Drains are present along the boundaries in the south-western and south-eastern parts of the site. The site is approximately 400m north of the west-east aligned South Holland Main Drain.

The geological map, sheet 144 (1992) at 1:50,000 scale, shows superficial Terrington Beds (now named Tidal Flat Deposits), overlying the solid geology of the Ampthill Clay at depth. The site is within an area reclaimed by the time of the Domesday Survey in 1086.

HISTORY OF THE SITE

Research into the site history involved reference to historical Ordnance Survey (OS) maps, photographs and information obtained from the internet. The map extracts studied are presented in the desk study map section, Appendix 1, and are described below. Distances are approximate.

<i>Extract studied</i>	<i>Description</i>
1887 OS sheets Lincolnshire 163NE & 164NW Scale 1:10,560 Figure A	The eastern part of the site contains outbuildings in an enclosure associated with Peartree House which is off-site adjacent the north-eastern corner of the site. The majority of the site is a parcel of land with trees, which has a linear drain along and within the southern boundary. A pond is shown 150m north-east of the site close to Poplartree House.
1888 OS sheets Lincolnshire 163.8 & 164.5 Scale 1:2500 Figure B	The site and immediate surrounding area appear unchanged.
1904 OS sheets Lincolnshire 163.8 & 164.5 Scale 1:2500 Figure C	The site and immediate surrounding area appear generally unchanged. A small new enclosure is shown in the eastern part of the site. A new house is also shown 140m south-west of the site.
1958 OS sheets TF41NW & TF42SW Scale 1:10,560 Figure D	Two new outbuildings are shown on the site.
1972 OS sheets TF4020 & TF4120 Scale 1:2500 Figure E	Additional outbuildings are shown on the site, which is now denoted as a piggery. The drain along the southern edge of the site has been infilled, and a new drain is shown along the eastern site boundary. Overhead power lines are shown crossing the south-western corner of the site. Pear-Tree Farm is denoted to the north-east. The pond 150m to the north-east of the site has been infilled.
1992 OS sheets TF41NW & TF42SW Scale 1:10,560 Figure F	The site and immediate surrounding area appear generally unchanged, however some of the outbuildings have been cleared from the south-eastern corner of the site.

<i>Extract studied</i>	<i>Description</i>
1994 OS sheets TF4020 & TF4120 Scale 1:2500 Figure G	The site area appears generally unchanged. The drain off-site along the eastern boundary has been infilled.
1999-2000 GroundSure Aerial Photograph of Site (Pages 11 & 12, Appendix 2)	A concrete surfaced yard and outbuildings are evident in the eastern and central parts of the site. A new outbuilding is evident close to the southern boundary. The western part of the site is grassed with occasional trees. Trees are also evident along the north-eastern boundary with Pear-Tree House, along the eastern and northern boundaries, as well as a hedgerow along the southern boundary. The overhead power lines are evident crossing the south-western corner.
2003 OS sheets TF4020SE & TF4120SW Scale 1:1250 Figure H	The site and immediately surrounding area appear unchanged.
2007 GroundSure Aerial Photograph of Site (Page 10, Appendix 2)	The site and immediately surrounding area appear unchanged.
2010 OS sheets TF41NW & TF42SW Scale 1:10,000 Figure I	The site and immediately surrounding area appear unchanged.
2015-2018 GroundSure Aerial Photograph of Site (Pages 8 & 9, Appendix 2)	The site area appears unchanged, although possibly disused.
2020 OS sheet TF4020 Not to Scale Figure J	The site and immediately surrounding area appears generally unchanged. A new outbuilding is shown off-site adjacent the north-eastern boundary, associated with Pear-Tree House.

Summary of Historical Information

The Ordnance Survey map of 1887 showed that the site was developed with outbuildings associated with Peartree House, which was off-site adjacent the north-eastern corner. By the 1950s to 1970s there were more buildings on the site, which was then denoted as a piggery, and it is these buildings which were in the process of being demolished at the time of

this investigation (June 2020). It was reported that concrete structures supporting water and heating oil tanks had been demolished as part of the site clearance.

SUMMARY OF ENVIRONMENTAL DATA

Appendix 2 contains information derived from Environmental Databases for a radius of up to 2,000m from the site. The information covers datasets held by Groundsure with contributors including the local authority, the Environment Agency (EA), British Geological Survey, Ordnance Survey and the Coal Authority and the results, within a radius of 250m, are summarised below:

1-2. Historical Industrial Sites	On-Site	0 - 250m
Potentially Contaminative Uses (1:10,000 mapping)	0	0
Historical Tank Database	0	0
Historical Energy Features Database	0	0
Historical Petrol & Fuel Site Database	0	0
Historical Garage & Motor Vehicle Repair Database	0	0
3. Landfill and Other Waste Sites	On-Site	0 - 250m
Landfill Sites	0	0
Historical Landfill and Other Waste Sites	0	0
Waste Exemptions	0	0
4. Current Land Use	On-Site	0 - 250m
Current Industrial Sites Data	1	2
Records of Petrol and Fuel Sites	0	0
Underground Electricity, High Pressure Oil and Gas Pipelines	0	0
Sites Determined as Contaminated Land under Part IIA EPA 1990	0	0
Records of COMAH and NIHHS Sites	0	0
Environmental permits/pollution incidents/registers	0	0
5-6. Hydrogeology and Hydrology	On-Site	0 - 250m
Productive strata within superficial geology beneath the site	No	
Productive strata within solid geology	No	
Groundwater Abstraction Licences	0	0
Surface Water Abstraction Licences	0	0
Potable Water Abstraction Licences	0	0
Source Protection Zones	0	0
Water Network Entries	1	33
Surface Water Features	1	18

7-9. Flooding					
Risk of flooding from rivers & the sea (RoFRaS) rating			Low		
Historical flood events			0	0	
Flood defences within 250m of site			No		
Any areas benefitting from flood defences within 250m of site			No		
Flood storage areas within 250m of site			No		
Environment Agency indicative Zone 2 floodplains within 50m of site			Yes		
Environment Agency indicative Zone 3 floodplains within 50m of site			Yes		
Surface water flooding on site			1 in 30 year (0.10m to 0.30m)		
Groundwater flooding on site			Negligible		
10-13. Designated Environmentally Sensitive Sites			On Site	0 - 250m	
Environmentally sensitive sites			0	0	
14-16. Geology					
Artificial Ground or Made Ground records			0	0	
Superficial Ground and Drift Geology records beneath the site			Yes		
17. Natural Hazards (on site)					
Hazard	Negligible	Very Low	Low	Moderate	High
Shrinking or Swelling Clay	-	-	On-site	-	-
Running Sand	-	-	-	On-site	-
Compressible Ground	-	-	-	On-site	-
Collapsible Rocks	On-site	-	-	-	-
Landslides	-	On-site	-	-	-
Soluble rocks	On-site	-	-	-	-
18. Mining					
Surface ground workings			0	1	
Underground workings			0	0	
Non coal-mining areas within 50m of site			0	0	
Mining cavities			0	0	
Brine affected areas on study site			No		
19. Radon					
The property is not in a Radon Affected Area, as less than 1% of properties are above the action level. No Radon Protective Measures are required for new properties or extensions.					

Database Summary

A piggery is recognised as a current use on the site, which was otherwise within a rural area. Electricity pylons are identified 147m west and 152m south-east of the site. A pond is identified 143m north-east of the site.

No made ground is recorded beneath the site. Superficial Tidal Flat Deposits are recorded beneath the site, which is classified by the EA as an unproductive stratum. The underlying solid geology Ampthill Clay Formation is also classified by the EA as an

unproductive stratum. There are no surface water or groundwater abstractions within 250m of the site. The site is not within a source protection zone.

The nearest surface water features are drains along the south-western and south-eastern corners of the site. The site has a low risk of flooding from Rivers and Sea, and is within a Zone 2 and Zone 3 flood zone. The site is not within an environmentally sensitive area.

There is a moderate hazard from compressible ground and running sand; a low hazard from shrinking and swelling clay; a very low hazard from landslides; and a negligible hazard from soluble rocks and collapsible rocks. No mining areas are recognised within 250m of the site.

The site is not in a radon affected area and no radon protection measures are required for new dwellings on the site.

PRELIMINARY RISK ASSESSMENT

Potential sources of contamination present on or beneath the site would relate primarily to; the historical use of the site; the presence of contaminated soil; and the potential presence of hazardous or ground gases beneath the site.

In order to assess the risks associated with the presence of ground contamination the linkages between the sources and potential receptors to contamination need to be established and evaluated. This is in accordance with the Environmental Protection Act 1990, which provides a statutory definition of Contaminated Land. To fall within this definition it is necessary that, as a result of the condition of the land, substances may be present on or under the land such that;

- *Significant harm is being caused or there is a significant possibility of such harm being caused; or*
- *Pollution of controlled waters is being, or is likely to be, caused.*

There are three principal factors that are assessed whilst undertaking a qualitative risk assessment for any site. These are the presence of a contamination source, the existence of migration pathways and the presence of a sensitive target(s). It should be noted that it is necessary for each element of source, pathway and target to be present in order for exposure of a human or environmental receptor to occur.

UK Government guidance on the assessment of contaminated land, requires risk to human health and the environment to be reviewed using source – pathway – target relationships. If each of these elements is present, the linkage provides a potential risk to the identified targets.

Contaminants or ***potential pollutants*** identified as ***sources*** in relation to the identified previous uses are listed overleaf in Table 1.

Table 1: Identified Potential Contaminant Sources

<i>Contaminant Source</i>	<i>Comments</i>
Drainage/buildings/tanks	Drains could provide a contaminant source. The existing buildings may contain asbestos. Former above ground fuel tanks could have provided a contaminant source.
Soil Beneath Site	Contamination may be present within made ground materials on the site.
Soil Gas	Potential soil gas generated from made ground or natural soils.
Ground Contamination Outside Site Boundary	Ground contamination migrating from adjoining sites.

A ***Pathway*** is defined as one or more routes through which a receptor is being, or could be, exposed to, or affected by, a given contaminant.

Potential ***Targets or Receptors*** fall within the categories of Human Health, Water Environment, Flora and Fauna, and Building Materials.

There are a number of possible pathways for the contaminants identified on the site to impact human and/or environmental receptors and these are summarised in Tables 2 and 3.

Table 2: Human Receptors and Pathways

<i>Human Receptor-Mechanism</i>	<i>Typical Exposure Pathway</i>
Human Inhalation	Breathing Dust and Fumes Breathing Gas emissions
Human Ingestion	Eating -contaminated soil, for example by small children -produce grown on contaminated soil Ingesting dust or soil on vegetables Drinking contaminated water
Human Contact	Direct skin contact with contamination Direct skin contact with contaminated liquids

Table 3: Water Receptors and Pathways

<i>Receptor-Water Environment</i>	<i>Typical Exposure Pathway</i>
Groundwater The Tidal Flat Deposits are indicated to be an unproductive stratum. The underlying solid geology Ampthill Clay Formation is also indicated to be an unproductive stratum. The site is not within a Source Protection Zone.	Surface infiltration of atmospheric waters into the soils beneath the site could wash or dissolve potential contaminants and migrate to underlying groundwater. Contamination leads to restriction/prevention of use as a resource, for example, drinking water, and can have secondary impacts on other resources, which depend on it.
Surface Water/Watercourses The nearest surface water features are the drains adjacent the south-west and south-eastern corners of the site.	Surface infiltration of atmospheric waters into the soils beneath the site could wash or dissolve potential contaminants and laterally migrate. Contamination leads to a restriction/prevention of use: -as drinking water resource -for amenity use Effects on aquatic life.

Preliminary Conceptual Model

Assessment of the potential linkage between ground contamination sources, human and environmental receptors have been assessed based on the desk study research documented in the preceding sections of this report.

A generalised preliminary conceptual model is presented below in Table 4.

Table 4: Preliminary Conceptual Model Relative to Residential Development

Receptors	Pathway	Estimated Potential for Linkage with Contaminant Sources			
		Drainage/ Buildings/Above Ground Tanks	Soil Beneath Site	Soil Gas	Ground Contamination Outside Site Boundary
Human Health – ground or construction workers	Ingestion and Inhalation of contaminated Soil, Dust and Vapour	Low likelihood/ Likely (asbestos)/ Likely	Low likelihood	Low likelihood	Low likelihood
Human Health – end users	Ingestion and Inhalation of contaminated Soil, Dust and Vapour	Unlikely	Low likelihood	Low likelihood	Low likelihood
Water Environment	Migration through ground into surface water or surrounding groundwater	Low likelihood	Unlikely	Unlikely	Unlikely
Flora	Vegetation on site growing on contaminated soil	Low likelihood	Low likelihood	Low likelihood	Unlikely
Building Materials	Contact with contaminated soil	Low likelihood	Low likelihood	Low likelihood	Low likelihood
Key to Table 4 Estimated Potential for Linkage with Contaminant Source		Definition			
High likelihood		There is a pollution linkage and an event that either appears very likely in the short term and almost inevitable over the long term, or there is evidence at the receptor of harm or pollution.			
Likely		There is a pollution linkage and all the elements are present and in the right place, which means that it is probable that an event will occur. Circumstances are such that an event is not inevitable, but possible in the short term and likely over the long term.			
Low likelihood		There is a pollution linkage and circumstances are possible under which an event could occur. However, it is by no means certain that even over a longer period such an event would take place, and is less likely in the shorter term.			
Unlikely		There is a pollution linkage but circumstances are such that it is improbable that an event would occur even in the very long term.			
N/A		Not Applicable.			

SITE WORK

The site work conducted on 15th June 2020 comprised five hand augered boreholes (HA1 to HA5) across the proposed garden areas of the site. The positions are shown on the exploratory hole location plan and proposed development plan following this report text.

Public utility service drawings provided by the client were consulted prior to determining the exploratory hole positions. Prior to excavation, a service scan was made at each position using a CAT (Cable Avoidance Tool) to check for the absence of detectable buried services that may otherwise have been damaged by the investigation.

The exploratory hole records, presented following the plans, give the descriptions and depths of the various strata encountered, details of all samples taken and the groundwater conditions observed during boring and on completion.

Hand Augered Boreholes

Boreholes HA1 to HA5 were excavated using hand auger tools. The exposed strata were logged and sampled by a Geoenvironmental Engineer, and samples collected for subsequent laboratory testing.

Representative disturbed samples were taken at regular intervals throughout the depth of the boreholes.

On completion, the boreholes were backfilled with arisings and the surfaces reinstated.

LABORATORY WORK

The samples were inspected in the laboratory and assessments of the soil characteristics have been taken into account during preparation of the exploratory hole records. The soil descriptions have been made in accordance with BS5930:2015+A1:2020. The chemical test results are presented following the exploratory hole records.

Chemical analysis of five soil samples recovered from the exploratory holes was undertaken by an independent laboratory, primarily for characterisation purposes. The samples were tested for a suite encompassing a wide range of potential contaminants outlined by the Environment Agency (EA) and National House Building Council (NHBC) document R&D 66; 2008 'Guidance for the Safe Development of Housing on Land Affected by Contamination'. Two of the samples were also tested for speciated Total Petroleum Hydrocarbons (TPH), BTEX and MTBE.

GROUND CONDITIONS

The ground conditions comprised made ground to between 0.15m (HA5) and 0.45m (HA4) depth, which was underlain by superficial Tidal Flat Deposit soils, which were proved to at least the base of all of the exploratory holes and a maximum depth of 0.90m. No groundwater was recorded within 0.90m below ground level during the investigation.

Made Ground

From surface, soft, brown and dark brown, slightly sandy, slightly gravelly, clayey silt fill was met to between 0.15m and 0.45m depth. The gravel fraction comprised angular and sub-angular ash, coal and brick fragments. Boreholes HA4 and HA5 were undertaken with yard areas of the former farm.

Tidal Flat Deposits

Beneath the made ground at between 0.15m and 0.45m depth, soft or firm, grey, brown and orange brown, silty clay was encountered to at least the base of the boreholes at between 0.70m and 0.90m depth. These soils were considered to represent superficial Tidal Flat Deposits.

Groundwater

All of the boreholes were dry during boring and on completion to between 0.70m and 0.90m depth.

Observations

Live roots were observed in all of the boreholes, and to at least 0.90m below ground level in HA5 which was close to trees in the south-eastern corner of the site.

Evidence of Contamination

The made ground encountered during this investigation was not noted to have olfactory or visual evidence of fuel contamination. The made ground contained fragments of ash, coal and brick.

COMMENTS ON THE SOIL CHEMICAL TEST RESULTS

The results of the laboratory chemical testing on near surface soil samples have primarily been compared to soil screening values (SSVs) produced by Land Quality Management Limited (LQM) and the Chartered Institute for Environmental Health (CIEH) presented in their document 'The LQM/CIEH S4ULs for Human Health Risk Assessment: 2015 (Publication Number S4UL3608)'. The LQM/CIEH S4ULs are intended for use in assessing the potential risks posed to human health by contaminants in soil and are transparently-derived and cautious 'trigger values' above which further assessment of the risks or remedial action may be needed. The S4ULs (Suitable for Use Levels) have been derived, in accordance with UK legislation and Environment Agency policy, using a modified version of the Environment Agency CLEA 1.06 software.

Reference has also been given to ATRISKsoil soil screening values produced by Atkins Limited and provided under licence to Ground Engineering Limited. Atkins SSVs have been derived in line with the Environment Agency 2009 guidance using the CLEA 1.071 software. With the absence of a S4UL for cyanide the ATRISKsoil SSV has been used as the soil screening criteria within this report.

In 2014 the Department for Environment Food and Rural Affairs (DEFRA) published, in their document SP1010, Category 4 Screening Levels (C4SL) for several contaminants including lead. The C4SL represent screening levels below which the land could be considered suitable for a specified use and definitely not contaminated land in respect of those determinands. With the absence of S4UL for lead the C4SL has been used as the soil screening criteria within this report.

For each contaminant the adopted soil screening criteria have been calculated for the following land uses:

- Residential use with home grown produce
- Residential use without home grown produce
- Commercial and industrial usage

The intended purpose of the SSVs are as “intervention values” in the regulatory framework for assessment of human health risks in relation to land use. These values are not binding standards, but are intended to inform judgements about the need for action to ensure that a new use of land does not pose any unacceptable risks to the health of the intended users.

Table 5 compares the test results for the made ground with the SSVs in relation to the specified uses. The number of test results which exceed these values, are also provided. Statistical analysis would not be meaningful for the small dataset and has not been undertaken.

Table 5: Comparison of Chemical Test Results with SSVs for Made Ground Soils

Determinand	Number of Samples	Min Value mg/kg	Max Value mg/kg	Number of Samples Exceeding SSV for			Measured 95 th Percentile mg/kg	Assessment Method	Soil Screening Criteria 2.5% SOM		
				Residential with home grown produce	Residential without home grown produce	Commercial/ Industrial			Residential with home grown produce mg/kg	Residential without home grown produce mg/kg	Commercial/ Industrial mg/kg
Organic Matter	5	4.2%	9.4%	-	-	-	-	-	-	-	-
Arsenic	5	11	16	0	0	0	15.13	S4UL	37	40	640
Cadmium	5	<0.2	2.1	0	0	0	1.39	S4UL	11	85	190
Chromium (III)	5	25	37	0	0	0	37.40	S4UL	910	910	8600
Chromium (VI)	5	<4.0	<4.0	0	0	0	<4.0	S4UL	6	6	33
Lead	5	19	350	1	1	0	142.83	C4SL	200	310	2330
Mercury	5	0.4	0.5	0	0	0	0.46	S4UL	11	15	320
Selenium	5	<1.0	2.1	0	0	0	1.69	S4UL	250	430	12,000
Nickel	5	21	27	0	0	0	27.08	S4UL	130	180	980
Phenols	5	<1.0	<1.0	0	0	0	<1.0	S4UL	200	690	690
Benzo[a]pyrene	5	<0.05	0.91	0	0	0	0.68	S4UL	0.98	1.2	15
Copper	5	15	65	0	0	0	49.74	S4UL	2400	7100	68,000
Zinc	5	64	1100	0	0	0	739.24	S4UL	3700	40,000	730,000
Free Cyanide	5	<1	<1	0	0	0	<1	ATRISK	34	34	34

Notes

S4UL and C4SL for metals were derived using 6% SOM. These values are not sensitive to SOM and would also be applicable for 1% SOM and 2.5% SOM.

LQM/CIEH S4ULs 'Copyright Land Quality Management Limited reproduced with permission; Publication Number S4UL3608. All rights reserved'.

ATRISKsoil SSVs produced by Atkins Limited and provided under licence to Ground Engineering Limited.

Discussion of Soil Results

Levels of almost all elements and compounds were within the associated soil screening values for both residential and commercial/industrial end uses. A slightly elevated lead concentration in a sample of fill at the rear south-eastern corner of the farmyard, from 0.10m depth in HA5, exceeded the soil screening values for residential end uses, but not for a commercial/industrial end use.

Statistical analysis, using the mean value test, indicates that none of the US95 values for all the elements and compounds tested, including lead, exceeded the screening values for the most sensitive end use of residential with home grown produce. None of the US95 values exceeded the screening values for a commercial or industrial usage.

The made ground did not have any olfactory nor visual evidence of fuel contamination. The total petroleum hydrocarbon concentrations in the samples tested were 101mg/kg (HA5) and 137mg/kg (HA4), which are not considered significant. The concentrations of BTEX and MTBE in the samples tested were all below the laboratory detection limit and are also not considered significant.

The previous investigation found localised TPH contamination beside two above ground fuel tanks in the farmyard, with total TPH concentrations of 2100mg/kg and 4800mg/kg, respectively.

The results indicate that the made ground would generally be considered suitable for retention at the surface in the context of a proposed residential setting. Where TPH impacted soils are encountered, they should be removed from the site and replaced with clean imported granular soils, subsoil, or topsoil.

UPDATED CONCEPTUAL MODEL

Assessment of the potential linkage between ground contamination sources, human and environmental receptors have been assessed based on the desk study research and the intrusive ground investigation documented in the preceding sections of this report.

A generalised conceptual model relative to the existing site and proposed residential use of the site is presented in Table 6 below.

Table 6: General Conceptual Model Relative to Future Residential Development

Receptors	Pathway	Estimated Potential for Linkage with Contaminant Sources			
		Drainage/ Buildings/ Tanks	Soil	Soil Gas	Off-Site Sources
Human Health – groundworkers	Ingestion and Inhalation of contaminated Soil, Dust and Vapour	Low/ Moderate/ Moderate	Low	Low	Very Low
Human Health – users of completed development	Ingestion and Inhalation of contaminated Soil, Dust and Vapour	N/A	Low to Moderate	Low	Very Low
Water Environment	Migration through ground into surface water or groundwater	Low	Very Low	Very Low	Very Low
Flora	Vegetation on site growing on contaminated soil	Very Low	Very Low	Low	Very Low
Building Materials	Contact with contaminated soil	Very Low	Very Low	Low	Very Low

<u>Key to Table 6</u> Risk	Definition
Very High	There is a high probability that severe harm could arise to a designated receptor from an identified hazard, or, there is evidence that severe harm to a designated receptor is currently happening. The risk, if realised, is likely to result in a substantial liability. Urgent investigation (if not undertaken already) and remediation are likely to be required.
High	Harm is likely to arise to a designated receptor from an identified hazard. Realisation of the risk is likely to present a substantial liability. Urgent investigation (if not undertaken already) and remedial works may be necessary in the short term and likely over the long term.
Moderate	It is possible that harm could arise to a designated receptor from an identified hazard. However, it is either relatively unlikely that any such harm would be severe, or if any harm were to occur it is more likely that the harm would be relatively mild.
Low	It is possible that harm could arise to a designated receptor from an identified hazard, but it is likely that this harm, if realised, would at worst normally be mild.
Very Low	There is a low possibility that harm could arise to a receptor. In the event of such harm being realised it is not likely to be severe.
N/A	Not Applicable because the proposed development will remove the source.

COMMENTS ON GROUND CONTAMINATION IN RELATION TO PROPOSED DEVELOPMENT

Anticipated exposure scenarios relating to the existing site, the site history and proposed residential end use of the site, in the context of the conceptual model, are discussed as follows.

This investigation may not have revealed the full extent of contamination on the site and appropriate professional advice should be sought if subsequent site work reveals materials that may appear to be contaminated.

Contaminated Soil

On the basis of this ground investigation, the site is underlain by between 0.15m and 0.45m of made ground resting on naturally deposited Tidal Flat Deposits. The level of contaminants indicates that there is a low risk of contaminants affecting groundworkers during any construction works, and there will be a low to moderate risk of affecting future end users of the site within a residential setting.

Any TPH impacted soils, including those previously identified beneath the proposed building, should be removed from the site and replaced with clean imported granular fill, subsoil or topsoil. The 0.15m to 0.45m thick surface fill encountered would generally be considered suitable for retention or re-use with garden or landscaped areas, and if geotechnically suitable could be considered for re-use beneath buildings or hardstanding areas.

There is a very low risk of contamination affecting the proposed dwelling and its foundations.

The underlying naturally deposited soils encountered beneath the site would also be considered suitable for re-use within the development.

Drainage

Redundant foul or surface water drain runs, if present, should be removed where encountered from beneath the site and precautions should ensure that any remaining effluent or sediment is directly disposed off-site. The integrity of any existing drains should be checked, and where they are to be retained, any damaged sections should be replaced prior to development.

Buildings

The existing remaining outbuildings within the site may have asbestos containing materials within them and an asbestos survey should be undertaken prior to the proposed redevelopment. Suitable precautions, in line with current best practice, should be put in place to protect workers from the effects of asbestos material, during the site clearance and redevelopment phases.

Soil Gas

There are no landfills within 250m of the site. The site is underlain by a surface layer of made ground, covering superficial, silty clay soils.

There is a low risk that hazardous gases would affect groundworkers during the construction phase and a low risk of hazardous gases affecting future users of the site.

The site lies within an area where less than 1% of homes are above the BRE action level for radon and no radon protection measures are required.

Human Health - Construction Workers

The risk of the made ground affecting the groundworkers during the construction phase would be considered to be low.

Based on the chemical test results, no special precautions would be required during the development of the site by workers who may come into contact with the soil during

groundworks, providing standard precautions are adopted which should generally include the procedures given by the Health and Safety Executive (The Blue Book) HS(G)66.

For the protection of workers during groundworks the following is recommended:

- a) Limit repeated or prolonged skin contact with soils by wearing gloves with sleeves rolled down.
- b) Washing facilities should be made available to groundworkers, so as to minimise the potential for inadvertent ingestion of soil.
- c) Generation of dust should be limited by damping-down.
- d) Suitable precautions, in line with current best practice, should be put in place to protect workers from the effects of asbestos containing material, during the site clearance phase. Asbestos containing materials should be handled by qualified operatives and disposed of at a suitably licensed landfill.
- e) If any soils are revealed which are different to those encountered by this ground investigation, the advice of a specialist should be sought in view of classifying the material and ascertaining its risk to groundworkers.

Human Health - Users of Completed Development

The results of the chemical analysis would indicate that the made ground should generally be considered to be suitable for re-use at the surface within any new landscaped or garden areas. Where garden/landscaped areas are proposed within the former farmyard (around HA4 and HA5), a clean cover with up to 0.30m of clean inert topsoil may be required to provide a suitable growing medium.

The made ground, except any TPH impacted soils, could be considered for re-use beneath proposed buildings and permanent hardstanding, if suitable for engineering purposes, where it is unlikely to affect future users of the site.

Any soil imported to site must be certified as "suitable for use".

No precautionary measures are required to protect the development from radon.

Water Environment

The site is underlain by superficial Tidal Flat Deposits, indicated by the EA to be an unproductive stratum, which cover the solid geology Ampthill Clay Formation at depth, also indicated by the EA to be an unproductive stratum. The nearest surface water features are the drains on the south-western and south-eastern corners of the site. The site does not lie within a source protection zone.

No groundwater was recorded within 0.90m below ground level during the investigation.

The risk to the water environment is considered very low as it is unlikely that the proposed development would impact the quality of the water environment.

Effects on Buried Services

The local water supply company should be consulted if new buried plastic water pipes within the made ground soils on this site are proposed.

Off-Site Disposal of Soil Arisings

The results of chemical analysis are provided following the exploratory hole records and can be used within the information necessary for basic characterisation of the soil destined for landfill. The Environment Agency publication Hazardous Waste, Technical Guidance WM3 outlines the methodology for classifying wastes and should be referenced for guidance. The test results (total metals, hydrocarbons and cyanide) should be compared to the relevant thresholds to determine whether they fall into the primary categories of non-hazardous or hazardous waste and will help indicate the likely European Waste Catalogue (EWC) code which is determined by the waste type. Asbestos containing materials would be considered hazardous and should be appropriately disposed of.

Excavated material and excess spoil should always be classified prior to removal from site as required by 'Duty of Care' (Environmental Protection Act, 1990) legislation. This means that material has to be given a proper description and waste classification prior to

removal. Basic characterisation is the responsibility of the waste producer, whilst compliance checking and on-site verification are generally the responsibility of the landfill operator. The landfill operator will need to liaise with the waste producer, as the approach relies on the information from basic characterisation.

It is expected that arisings of natural soils from the excavations across this site would fall into the inert category under the European Waste Catalogue description 'Soil and Stones', EWC code 17 05 04 with restrictions excluding topsoil and peat.

CONCLUSIONS

The proposed development is understood to comprise construction of a new large residential dwelling, with associated gardens, landscaping and hardstanding areas.

Remediation Strategy

Suitable precautions, in line with current best practice, should be put in place to protect workers from the effects of any asbestos containing material during the site clearance phase.

The results of the chemical analysis would indicate that the made ground should generally be considered to be suitable for re-use at the surface within any new garden, landscaped or patio areas. Similarly, for areas to be covered by buildings or permanent hard surfaced areas, the made ground could also be re-used, however these soils could affect buried services or be geotechnically unsuitable.

Any TPH impacted soils should be removed from the site and replaced with clean imported granular fill, subsoil, or topsoil.

In the former farmyard area (around HA4 and HA5), a clean cover of imported subsoil and topsoil may be required to provide a suitable growing medium.

Any soil imported to site must be certified as "suitable for use".

Imported Materials

Any imported materials should have appropriate certificates confirming its suitability prior to placement.

REMEDICATION METHOD STATEMENT


The following points will constitute a plan for remedial works considered necessary in order to ensure that soils retained within the development are fit for use.

- The groundworks contractor should undertake a watching brief during works to check for polluted soil.
- An asbestos survey should be undertaken and any asbestos materials should be handled by qualified operatives and disposed of at a suitably licensed landfill.
- The made ground is generally considered suitable for retention where private residential garden areas are proposed, however in the former farmyard area a clean imported topsoil may be required to provide a suitable growing medium. Selected made ground could be considered for re-use beneath proposed buildings and permanent hardstanding.
- TPH impacted soils should be removed from the site and replaced with clean imported granular fill, subsoil or topsoil.
- If soils are revealed which are different to those encountered by this ground investigation, the advice of a specialist should be sought.
- A photographic record of such remediation should be undertaken by the contractor.
- Any imported 'clean' inert topsoil and granular fill should be supported by verification certificates to provide proof of its suitability. Documentation relating to the source of clean inert topsoil should be presented to the Local Planning Authority for approval prior to infilling. Samples of any imported clean topsoil placed in the garden areas should be tested to verify that the soil is suitable for use.
- The Local Authority should also be informed regarding each stage of the works and photographic evidence together with copied waste transfer receipts for any arisings should be gathered, as they are essential to demonstrate the works.
- The local water supply company should be consulted if new buried plastic water pipes within the made ground soils on this site are proposed.

VALIDATION

As the scheme includes private gardens and/or landscaped areas, a watching brief would be recommended. Implementation of the remediation method statement should be checked during construction and on completion, and appropriate records kept so that a Validation Report can be compiled and subsequently submitted to the local authority.

GROUND ENGINEERING LIMITED




S. WEATHERLEY

B.Eng.(Hons.),

C.Geol., F.G.S.

Senior Geo-Environmental Engineer



C. M. J. EBELING

M.Sc.(Eng.), M.A.E.G.,


C.Geol., F.G.S.

Director

APPENDIX 1


HISTORICAL MAP EXTRACTS

Figure A

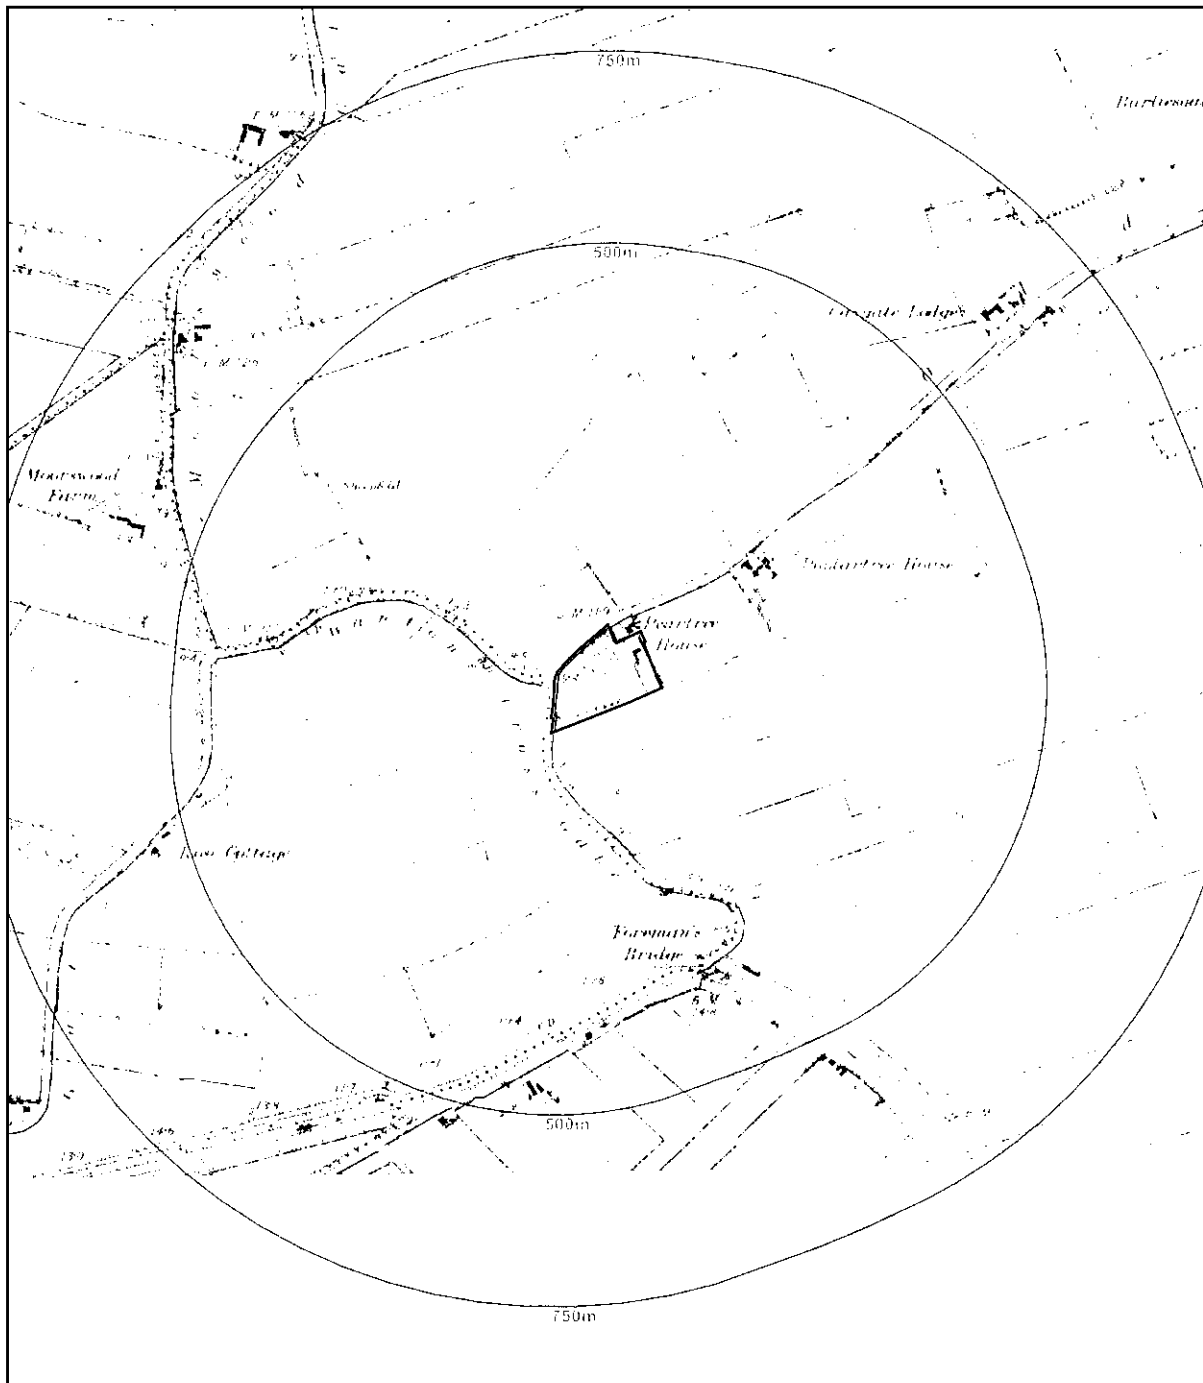IN

Peterborough Tel : 01733 566566

Figure B

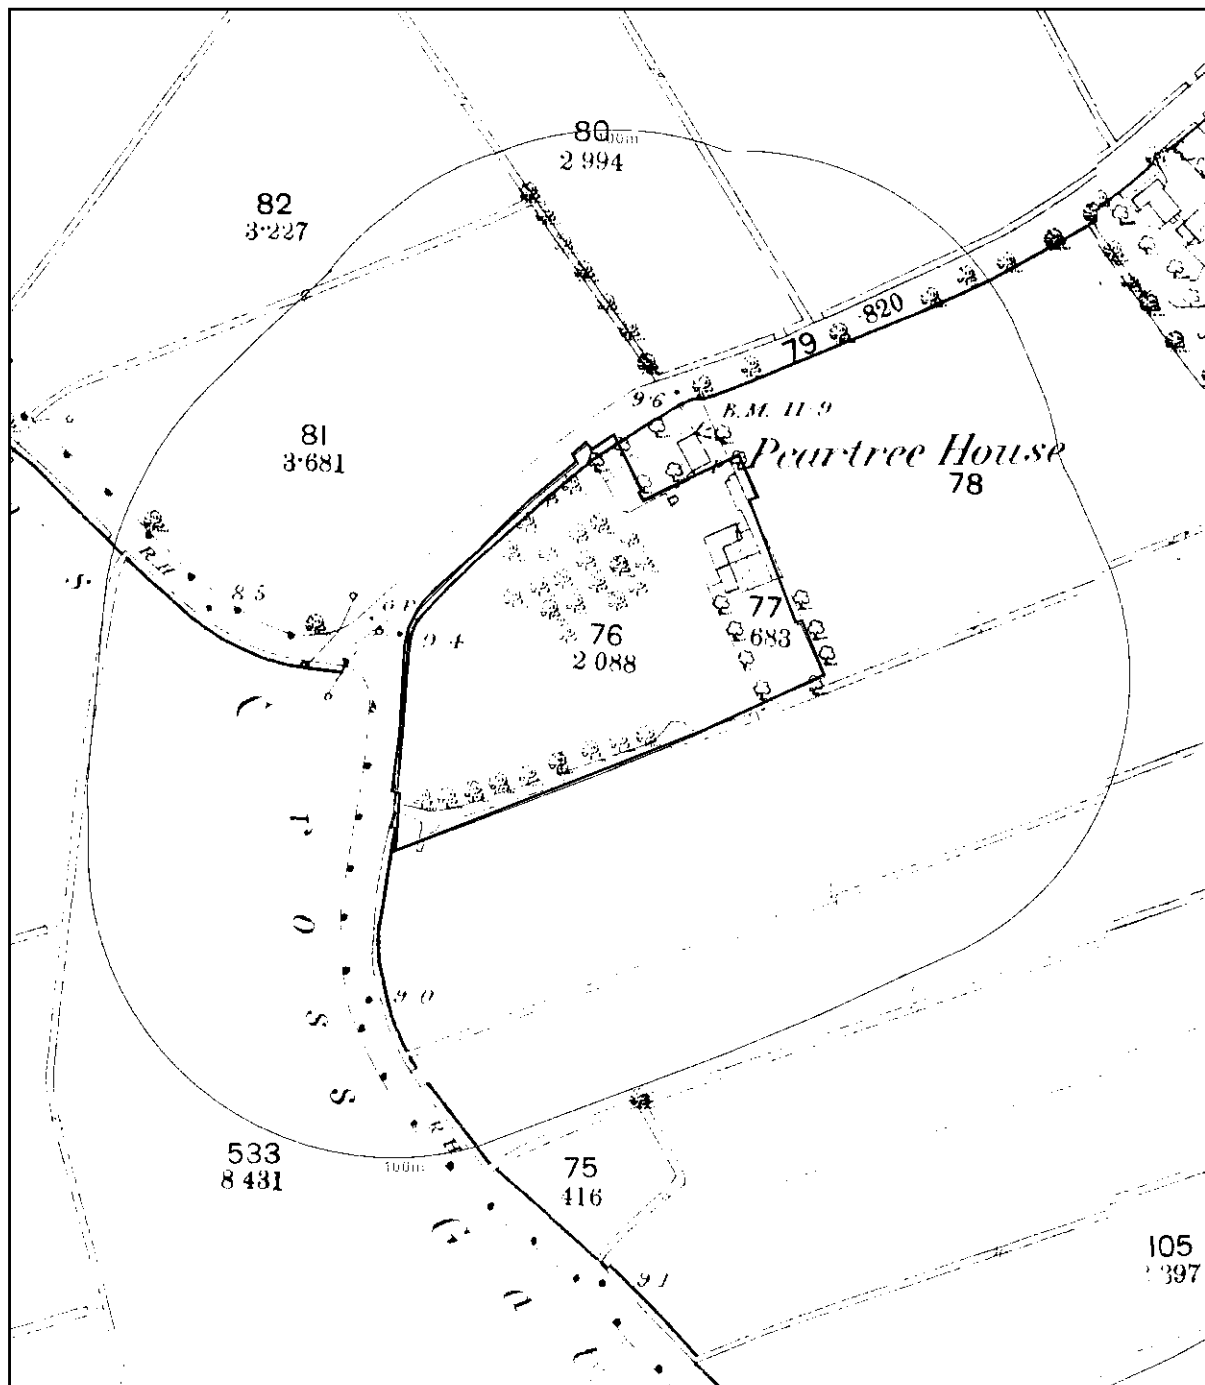IN


C15075A

Site History

Figure C

Reproduced from the 1904 edition Ordnance Survey sheets Lincolnshire 163.8 & 164.5 at 1:2500 scale with the permission of the Controller of Her Majesty's Stationery Office, © Crown Copyright. All rights reserved. Licence number AL100005523

N

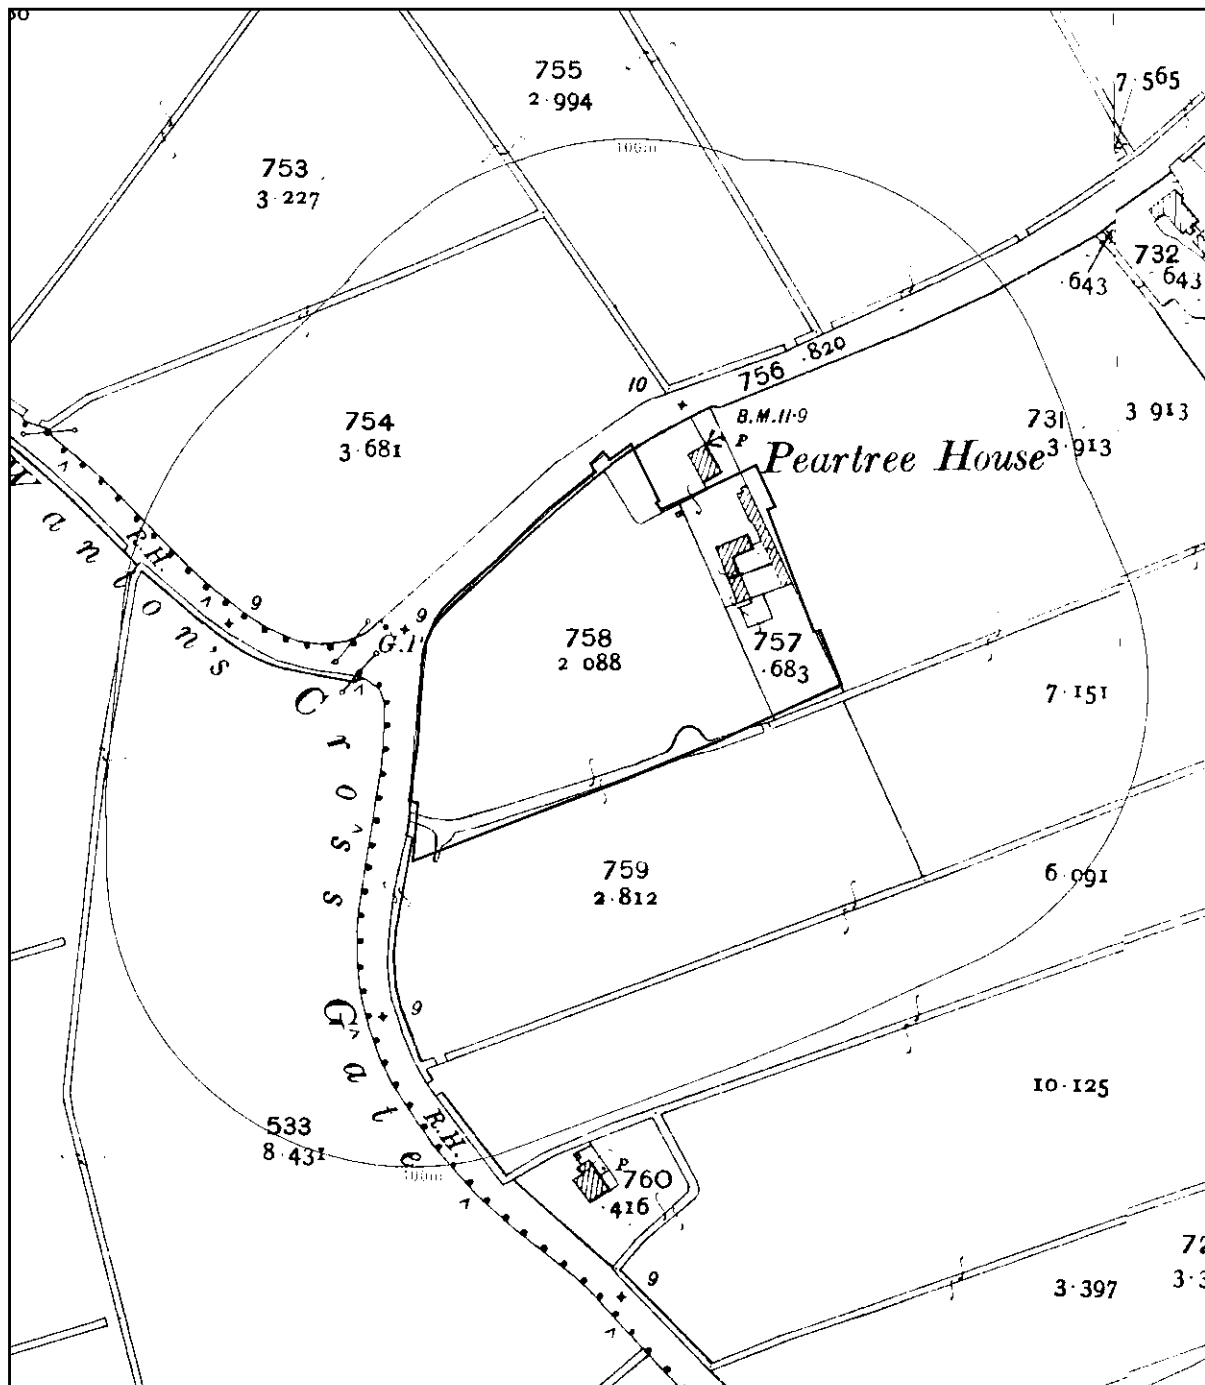

Project : Pear Tree Farm, St. James Road, Long Sutton

Client : Nene Transport (Lincs) Limited

**GROUND
ENGINEERING
LIMITED**

Peterborough Tel : 01733 566566

Project No.


C15075A

Site History

Figure D

Reproduced from the 1958 edition Ordnance Survey sheets TF41NW & TF42SW at 1:10,560 scale with the permission of the Controller of Her Majesty's Stationery Office, © Crown Copyright. All rights reserved. Licence number AL100005523

N
N

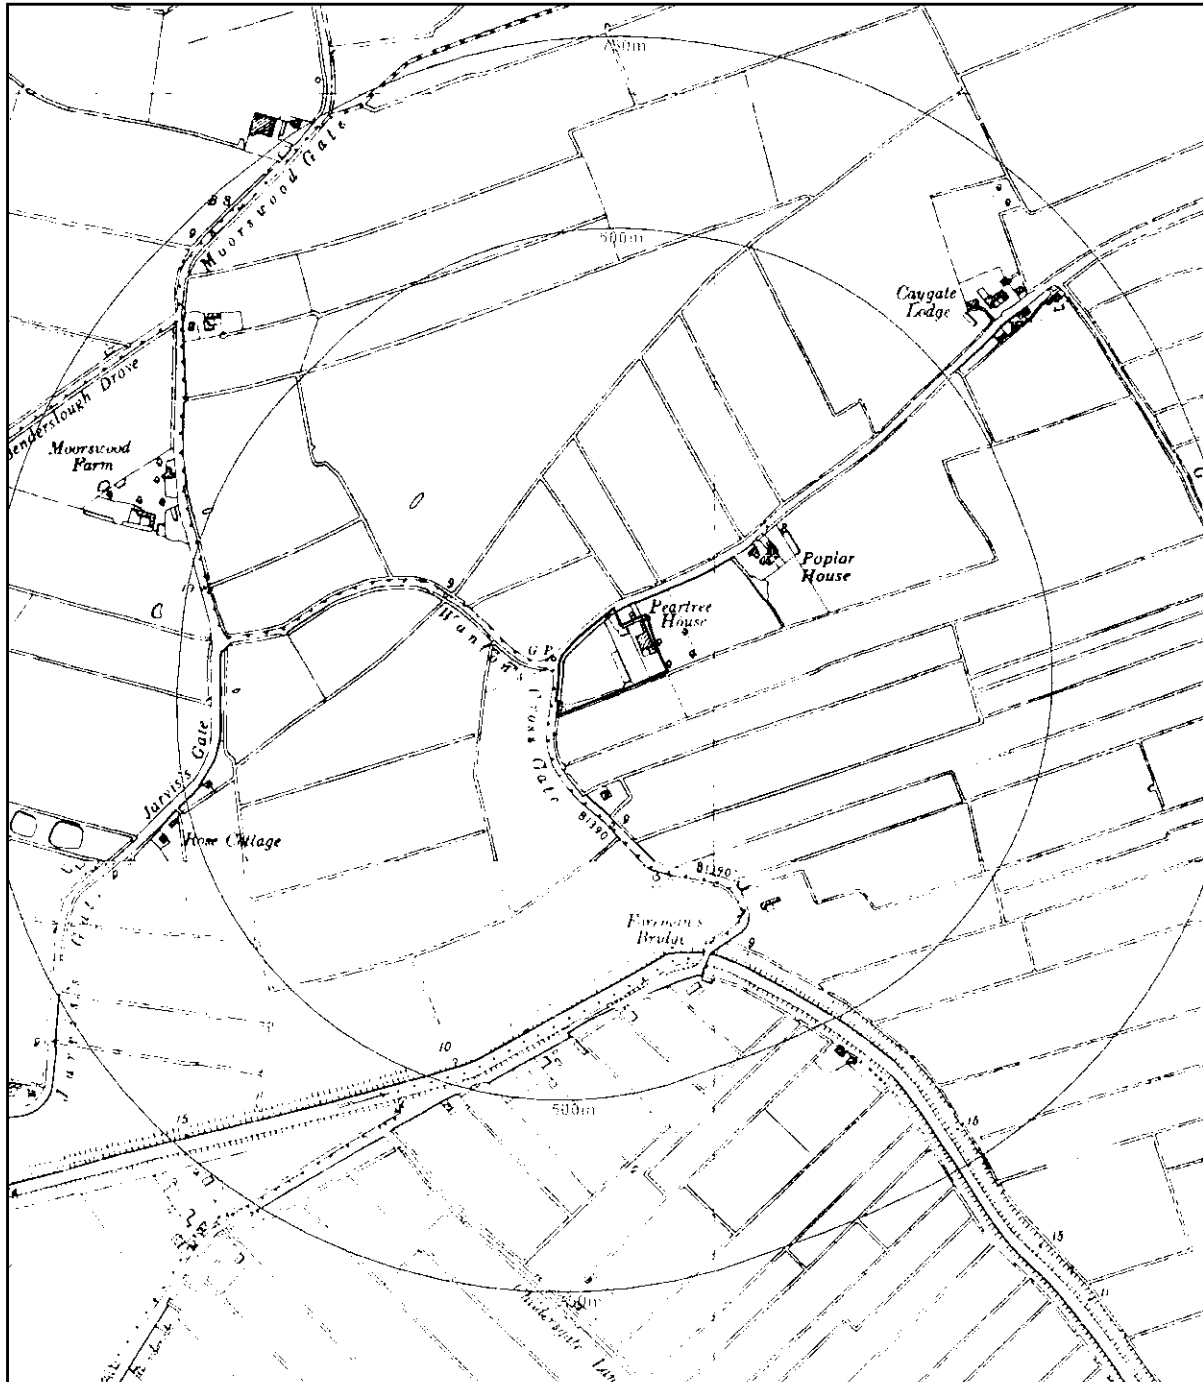

Project : Pear Tree Farm, St. James Road, Long Sutton

Client : Nene Transport (Lincs) Limited

**GROUND
ENGINEERING
LIMITED**

Peterborough Tel : 01733 566566

Project No.


C15075A

Site History

Figure F

Reproduced from the 1992 edition Ordnance Survey sheets TF41NW & TF42SW at 1:10,000 scale with the permission of the Controller of Her Majesty's Stationery Office, © Crown Copyright. All rights reserved. Licence number AL100005523

N
N

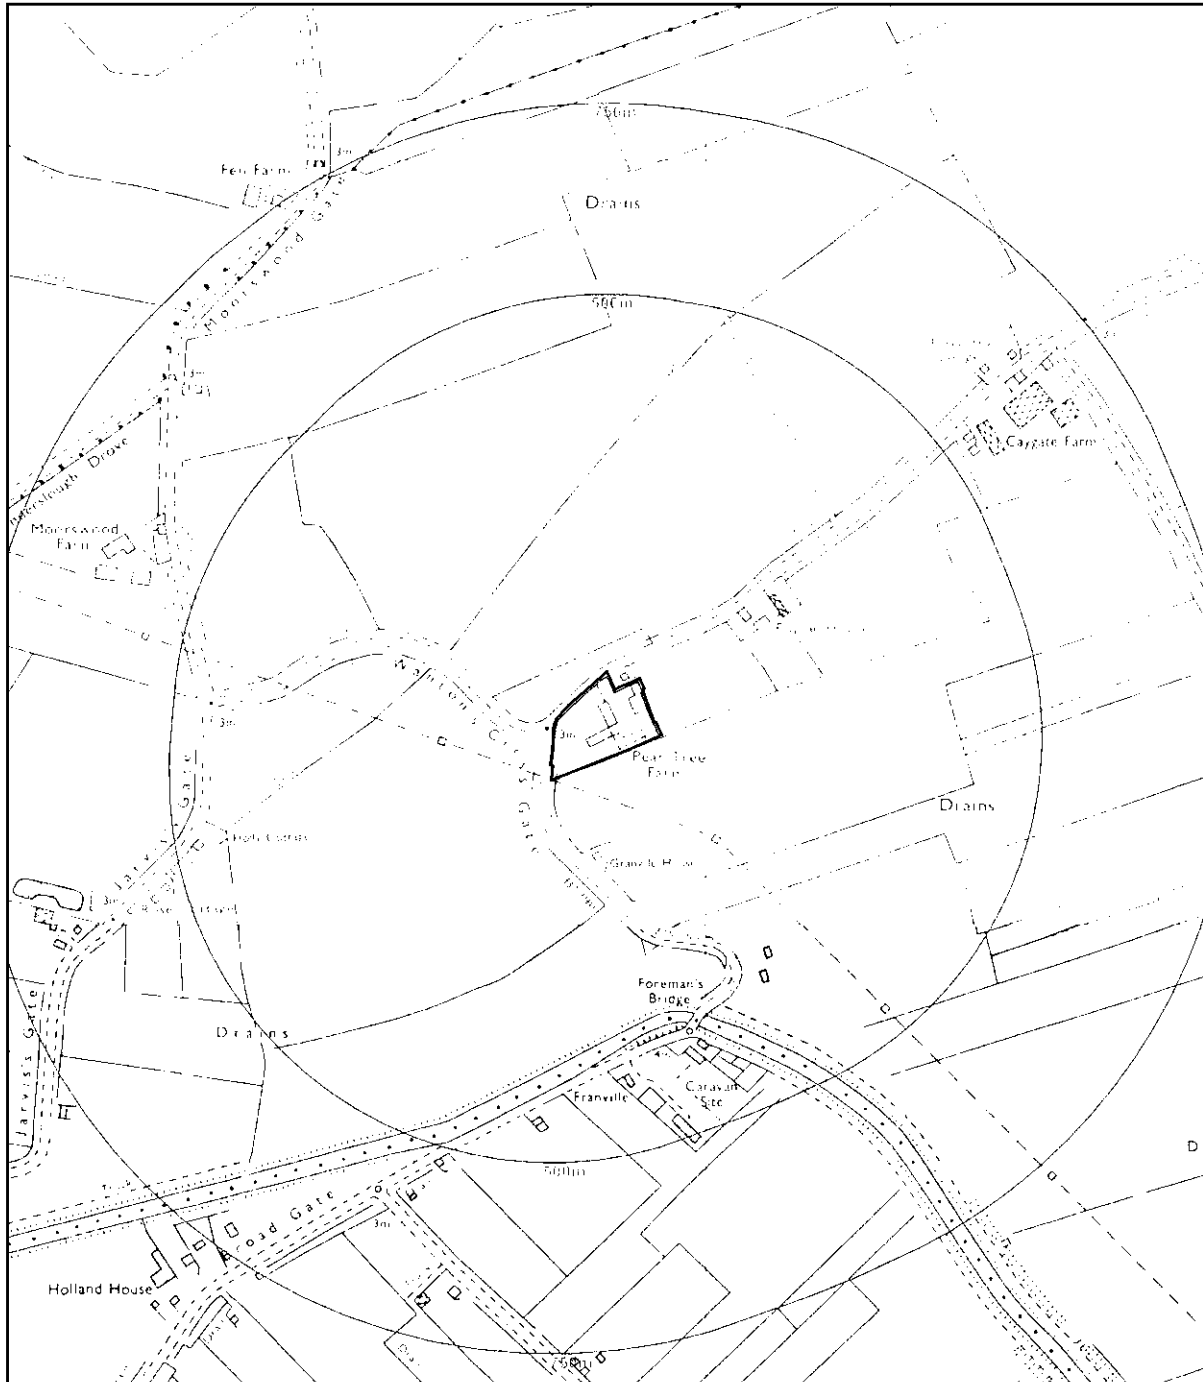

Project : Pear Tree Farm, St. James Road, Long Sutton

Client : Nene Transport (Lincs) Limited

**GROUND
ENGINEERING
LIMITED**

Peterborough Tel : 01733 566566

Project No.


C15075A

Site History

Figure G

Reproduced from the 1994 edition Ordnance Survey sheets TF4020 & TF4120 at 1:2500 scale with the permission of the Controller of Her Majesty's Stationery Office, © Crown Copyright. All rights reserved. Licence number AL100005523

N
N

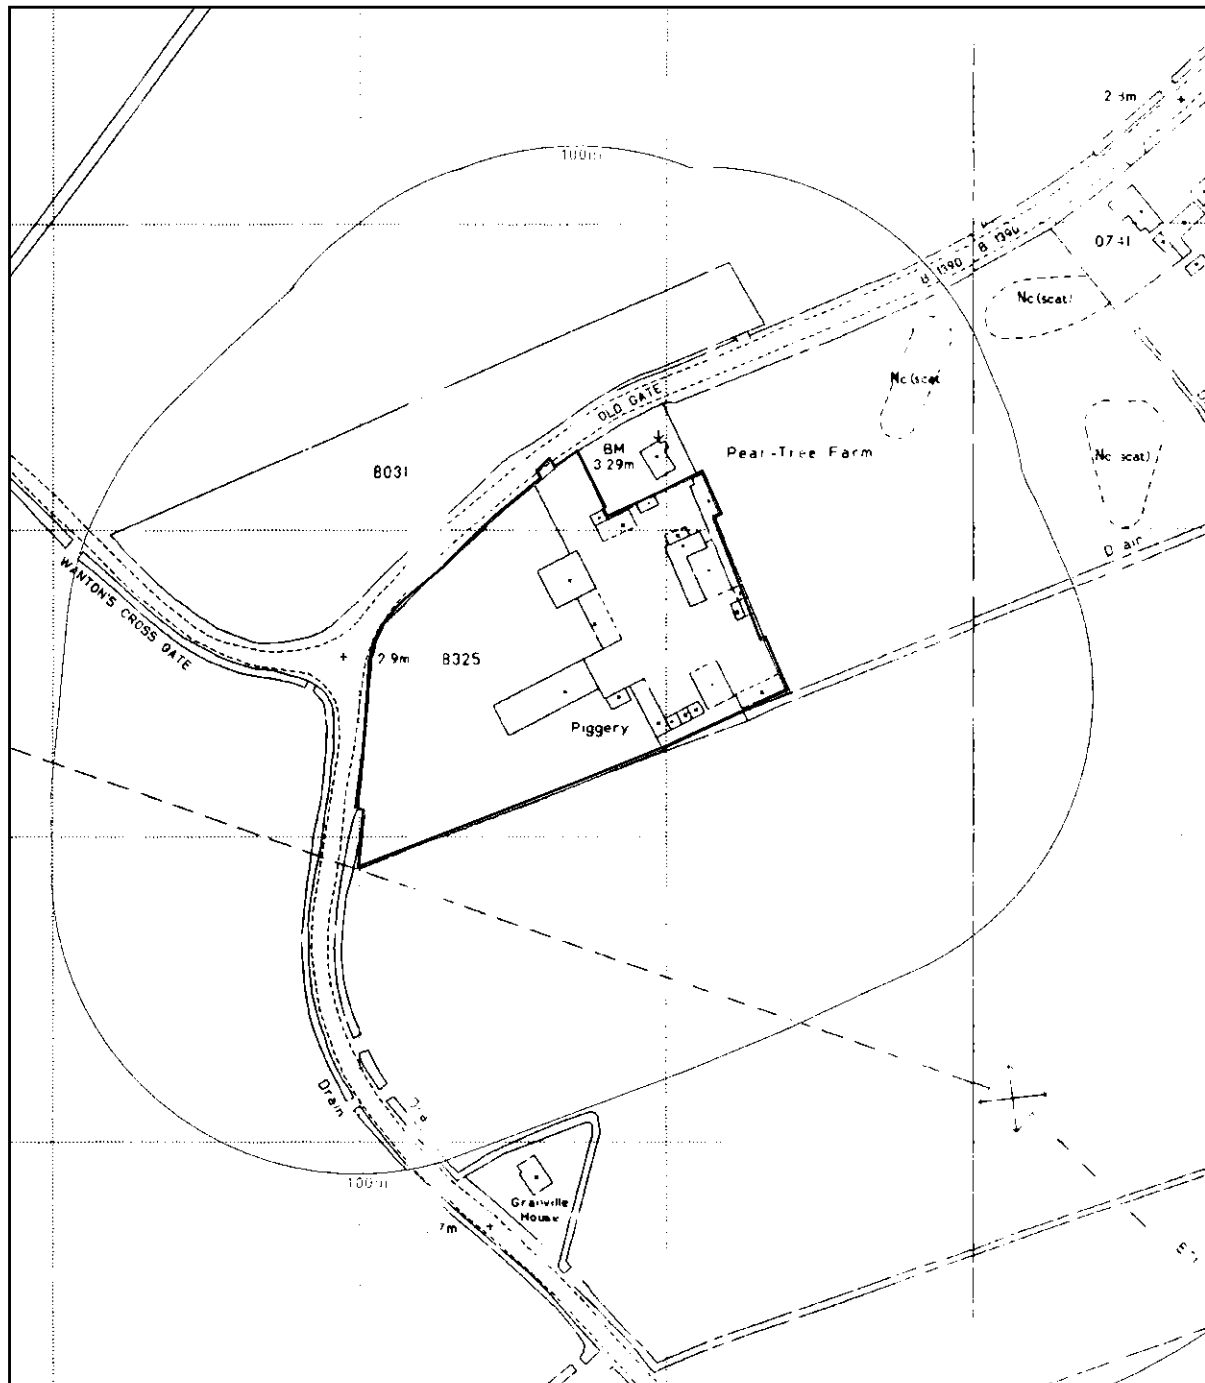

Project : Pear Tree Farm, St. James Road, Long Sutton

Client : Nene Transport (Lincs) Limited

**GROUND
ENGINEERING
LIMITED**

Peterborough Tel : 01733 566566

Project No.


C15075A

Site History

Figure H

Reproduced from the **2003** edition Ordnance Survey sheets **TF4020SE & TF4120SW** originally at **1:1250** scale with the permission of the Controller of Her Majesty's Stationery Office, © Crown Copyright. All rights reserved. Licence number AL100005523

N
N

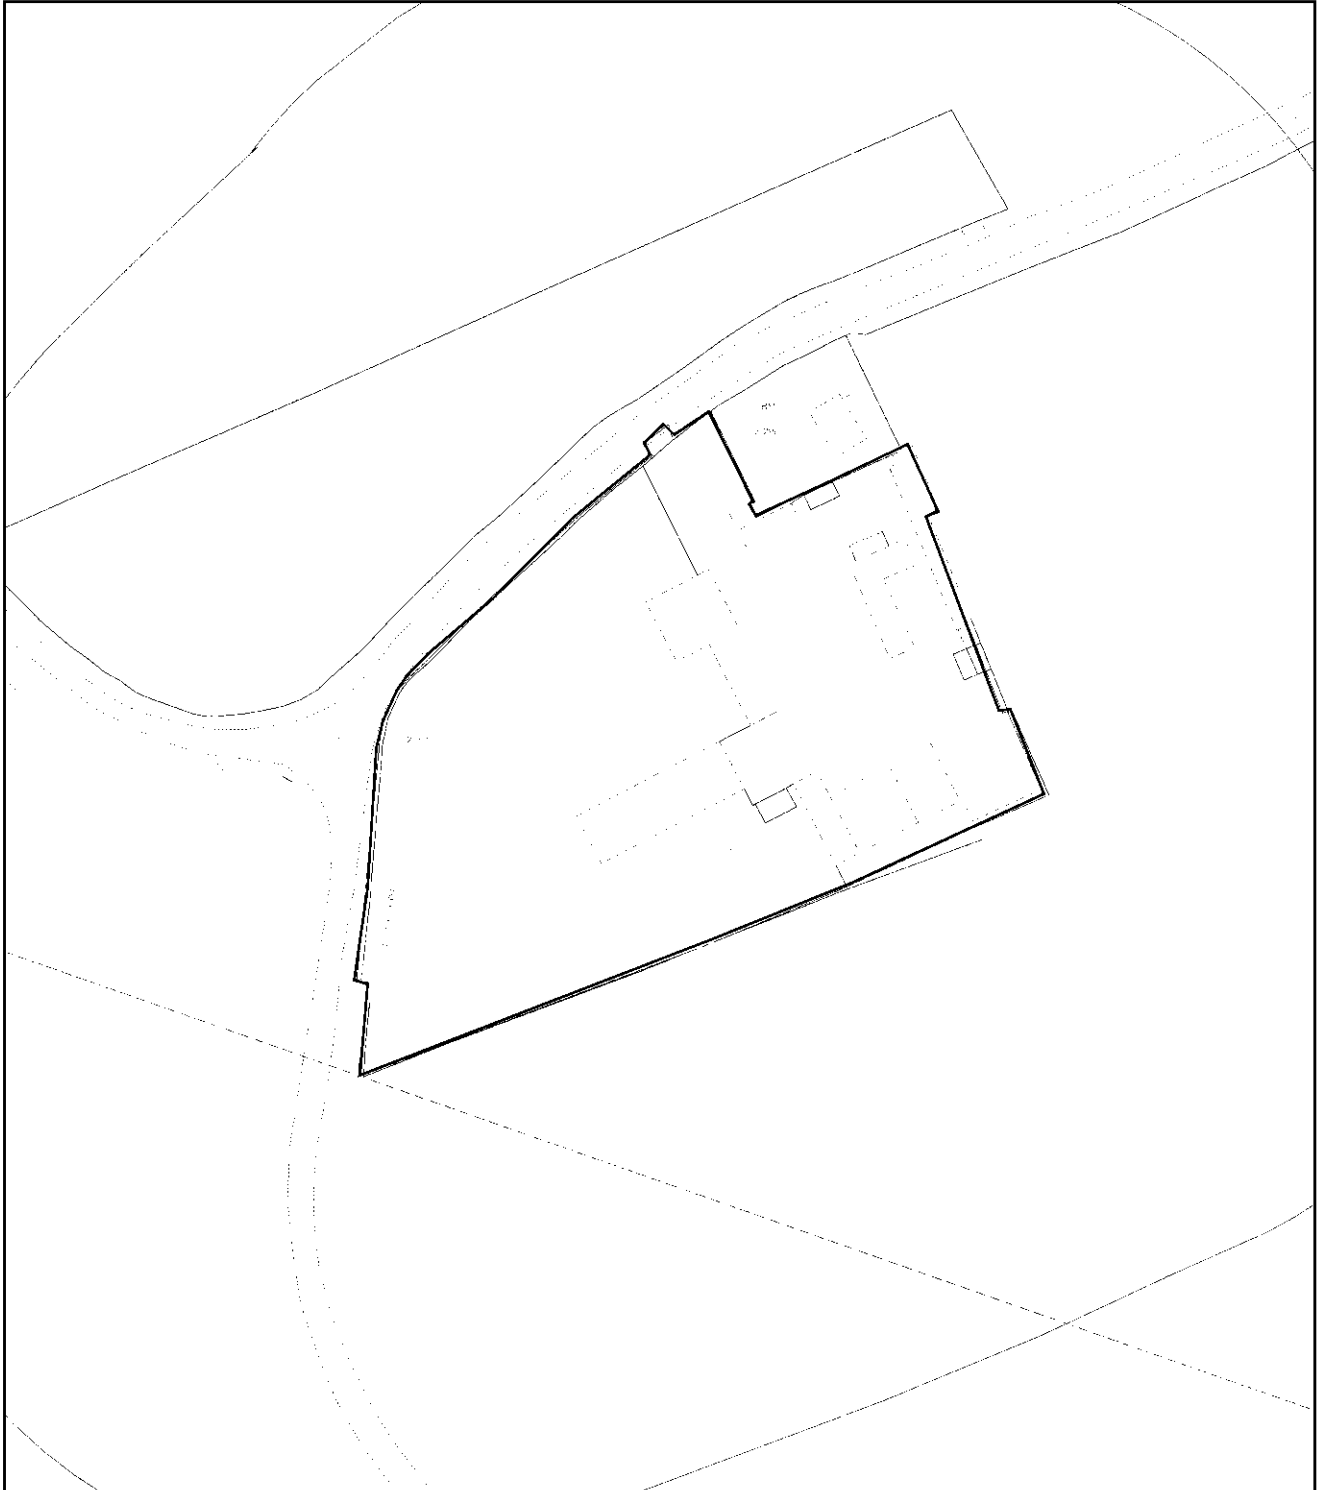

Project : Pear Tree Farm, St. James Road, Long Sutton

Client : Nene Transport (Lincs) Limited

**GROUND
ENGINEERING
LIMITED**

Peterborough Tel : 01733 566566

Project No.


C15075A

Site History

Figure I

Reproduced from the 2010 edition Ordnance Survey sheets TF41NW & TF42SW at 1:10,000 scale with the permission of the Controller of Her Majesty's Stationery Office, © Crown Copyright. All rights reserved. Licence number AL100005523

N

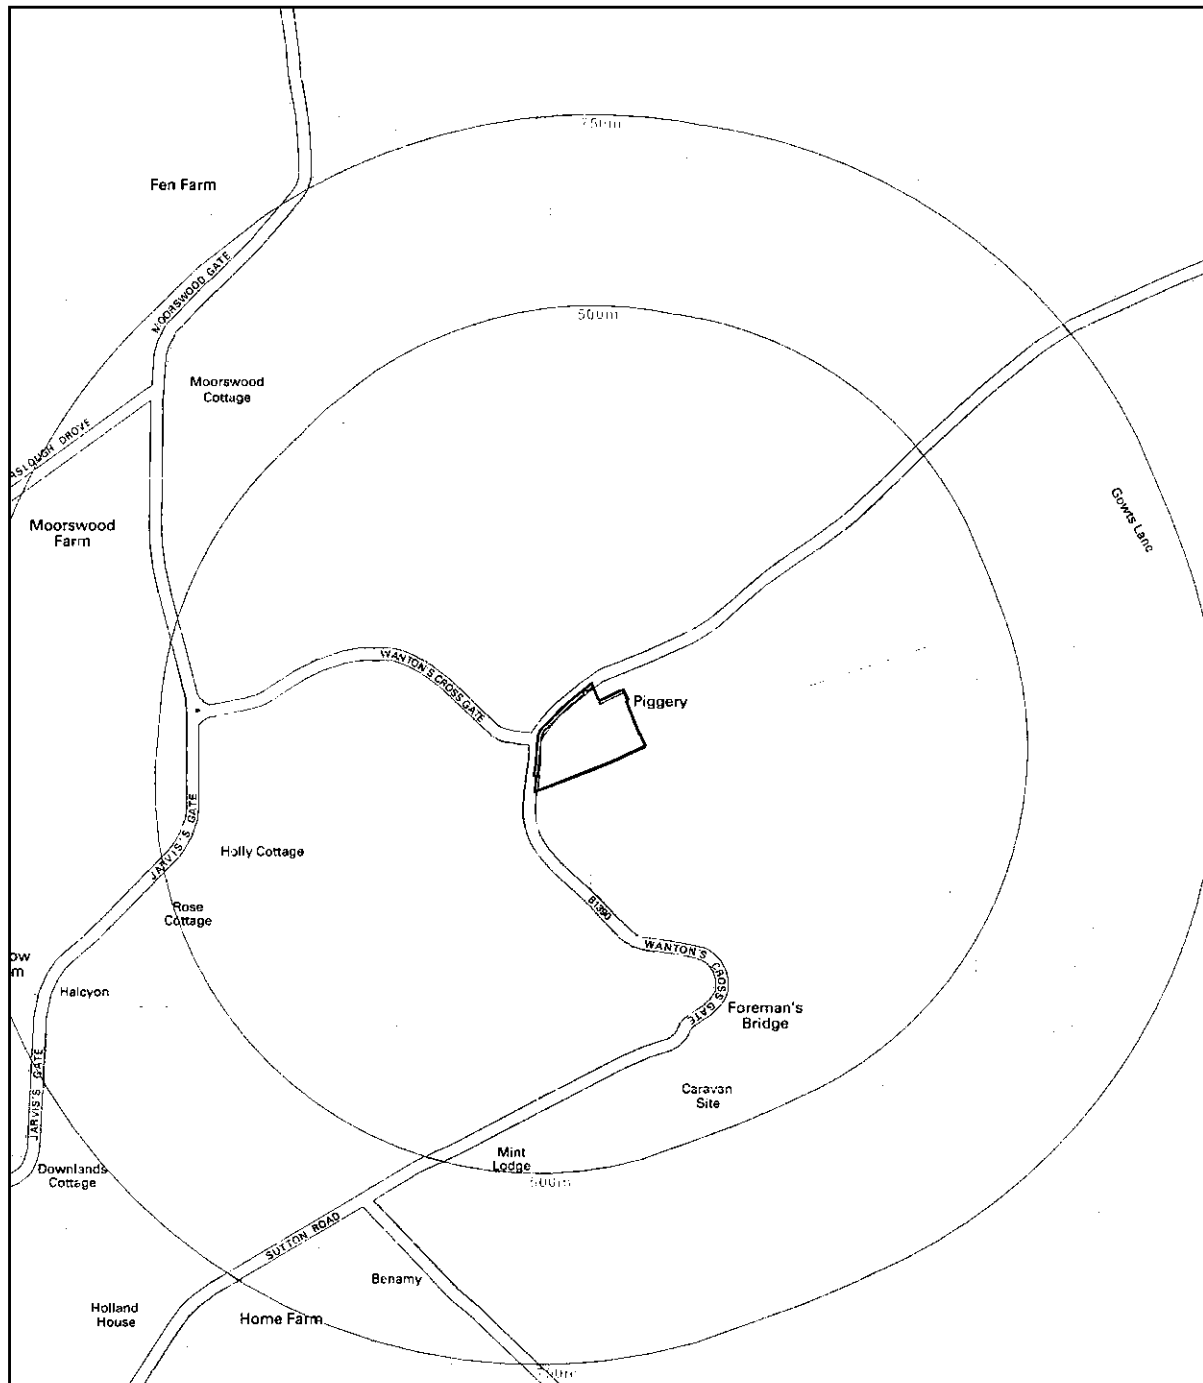

Project : Pear Tree Farm, St. James Road, Long Sutton

Client : Nene Transport (Lincs) Limited

**GROUND
ENGINEERING
LIMITED**

Peterborough Tel : 01733 566566


Project No.

C15075A

Site History

Figure J

Reproduced from the **2020** edition Ordnance Survey sheet **TF4020 (BT Plan)** Not to scale with the permission of the Controller of Her Majesty's Stationery Office, © Crown Copyright. All rights reserved. Licence number AL100005523

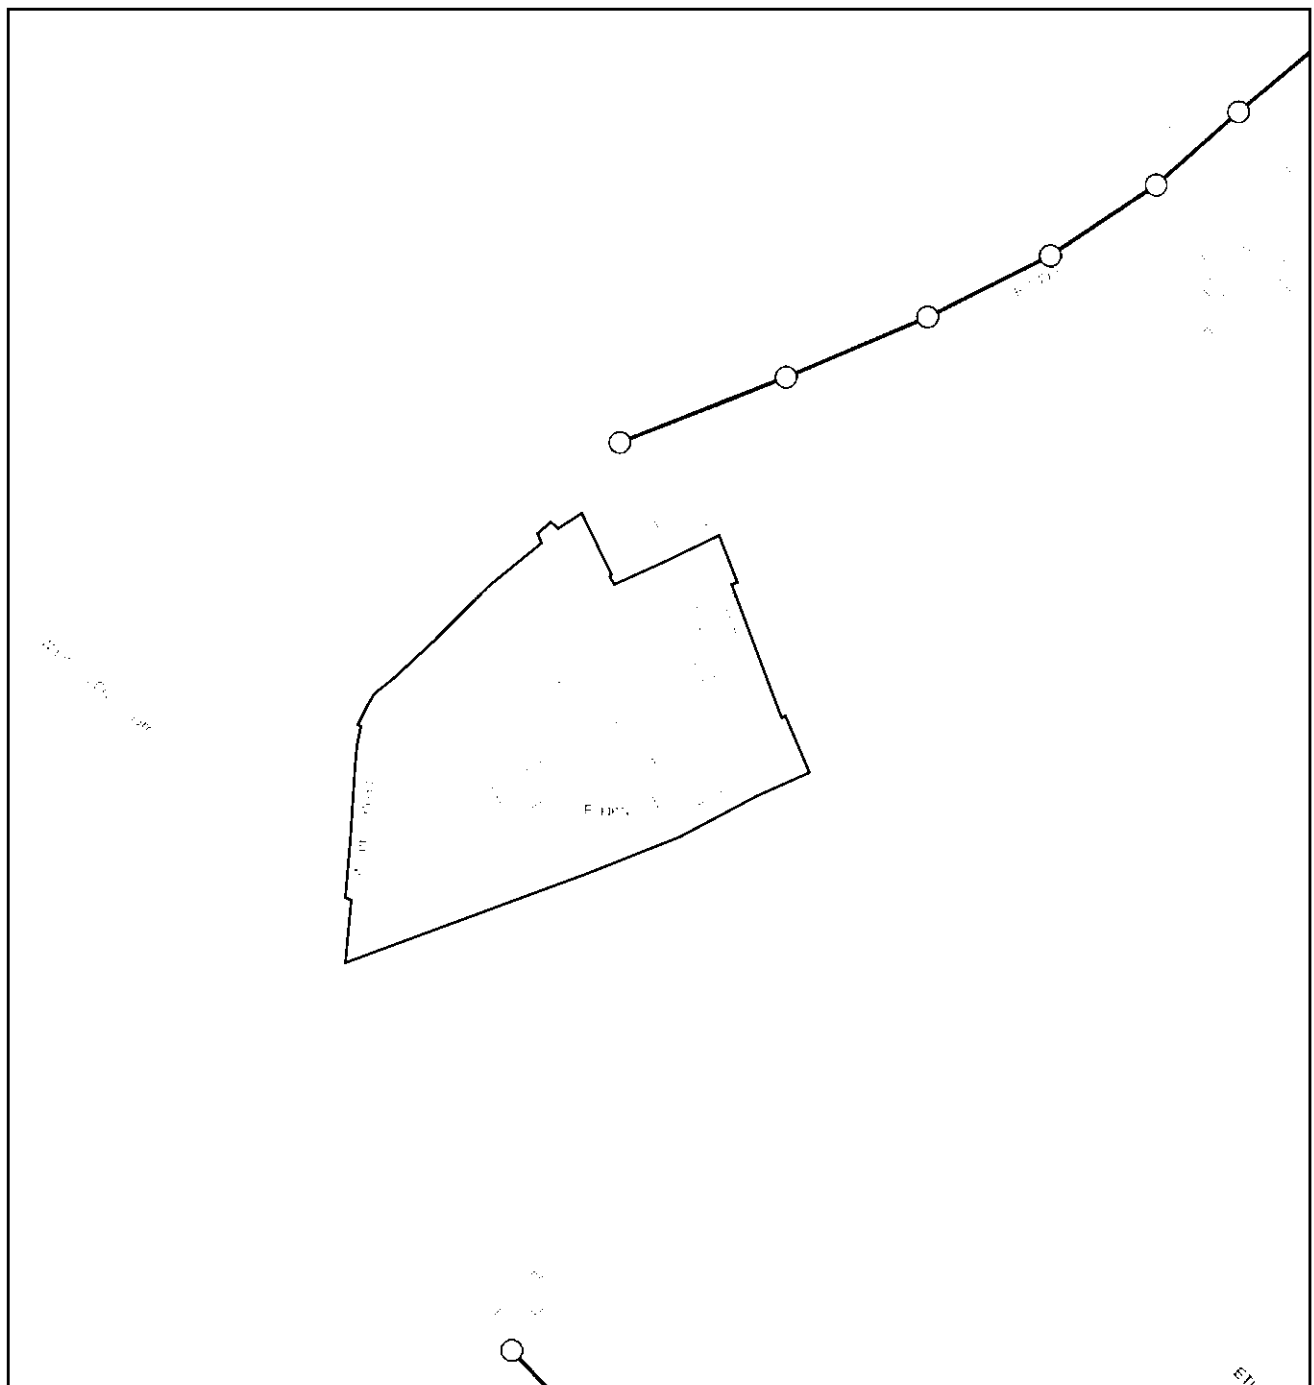

Project : Pear Tree Farm, St. James Road, Long Sutton

Client : Nene Transport (Lincs) Limited

**GROUND
ENGINEERING
LIMITED**

Peterborough Tel : 01733 566566

Project No.	
--------------------	--

C15075A

APPENDIX 2

ENVIRONMENTAL DATABASE SEARCH

PEAR TREE FARM, ST JAMES ROAD, LONG SUTTON, SPALDING, PE12 9BA

Order Details

Date: 07/09/2020
Your ref: SWC15075A
Our Ref: GS-7028831
Client: Ground Engineering Limited

Site Details

Location: 540889 320248
Area: 1.11 ha
Authority: South Holland District Council

Groundsure
08444 159 000

1:1000

© Crown copyright and database rights 2020. Ordnance Survey Licence 100035207

Summary of findings

p. 2

Aerial image

p. 8

OS MasterMap site plan

p.13

groundsure.com/insightuserguide

Contact us with any questions at:
info@groundsure.com
08444 159 000

Summary of findings

Page	Section	Past land use	On site	0-50m	50-250m	250-500m	500-2000m
------	---------	---------------	---------	-------	---------	----------	-----------

Page	Section	Past land use - un-grouped	On site	0-50m	50-250m	250-500m	500-2000m
------	---------	----------------------------	---------	-------	---------	----------	-----------

Page	Section	Waste and landfill	On site	0-50m	50-250m	250-500m	500-2000m
------	---------	--------------------	---------	-------	---------	----------	-----------

Page	Section	Current industrial land use	On site	0-50m	50-250m	250-500m	500-2000m
<u>20</u>	<u>4.1</u>	<u>Recent industrial land uses</u>	1		2		



Page	Section	Hydrogeology	On site	0-50m	50-250m	250-500m	500-2000m
<u>25</u>	<u>5.1</u>	<u>Superficial aquifer</u>	Identified (within 500m)				
<u>26</u>	<u>5.2</u>	<u>Bedrock aquifer</u>	Identified (within 500m)				
<u>27</u>	<u>5.3</u>	<u>Groundwater vulnerability</u>	Identified (within 50m)				

Page	Section	Hydrology	On site	0-50m	50-250m	250-500m	500-2000m
<u>31</u>	<u>6.1</u>	<u>Water Network (OS MasterMap)</u>	1	6	27		



<u>34</u>	<u>6.2</u>	<u>Surface water features</u>	1	4	14
<u>34</u>	<u>6.3</u>	<u>WFD Surface water body catchments</u>	1		
<u>35</u>	<u>6.4</u>	<u>WFD Surface water bodies</u>			

Page	Section	River and coastal flooding	On site	0-50m	50-250m	250-500m	500-2000m
<u>36</u>	<u>7.1</u>	<u>Risk of Flooding from Rivers and Sea (RoFRaS)</u>	Low (within 50m)				

<u>38</u>	<u>7.6</u>	<u>Flood Zone 2</u>	Identified (within 50m)				
<u>39</u>	<u>7.7</u>	<u>Flood Zone 3</u>	Identified (within 50m)				

Page	Section	Surface water flooding
<u>40</u>	<u>8.1</u>	<u>Surface water flooding</u>
		1 in 30 year, 0.1m - 0.3m (within 50m)

Page	Section	Groundwater flooding
<u>42</u>	<u>9.1</u>	<u>Groundwater flooding</u>
		Negligible (within 50m)

Page	Section	Environmental designations	On site	0-50m	50-250m	250-500m	500-2000m
------	---------	----------------------------	---------	-------	---------	----------	-----------



Page	Section	Visual and cultural designations	On site	0-50m	50-250m	250-500m	500-2000m
------	---------	----------------------------------	---------	-------	---------	----------	-----------

Page	Section	Agricultural designations	On site	0-50m	50-250m	250-500m	500-2000m
<u>50</u>	<u>12.1</u>	<u>Agricultural Land Classification</u>	Grade 2 (within 250m)				

Page	Section	Habitat designations	On site	0-50m	50-250m	250-500m	500-2000m
------	---------	----------------------	---------	-------	---------	----------	-----------

Page	Section	Geology 1:10,000 scale	On site	0-50m	50-250m	250-500m	500-2000m
<u>54</u>	<u>14.1</u>	<u>10k Availability</u>	Identified (within 500m)				



Page	Section	Geology 1:50,000 scale	On site	0-50m	50-250m	250-500m	500-2000m
<u>58</u>	<u>15.1</u>	<u>50k Availability</u>	Identified (within 500m)				
<u>60</u>	<u>15.4</u>	<u>Superficial geology (50k)</u>	1	1			
<u>61</u>	<u>15.5</u>	<u>Superficial permeability (50k)</u>	Identified (within 50m)				
<u>62</u>	<u>15.8</u>	<u>Bedrock geology (50k)</u>	1	1			
<u>63</u>	<u>15.9</u>	<u>Bedrock permeability (50k)</u>	Identified (within 50m)				
Page	Section	Boreholes	On site	0-50m	50-250m	250-500m	500-2000m
<u>64</u>	<u>16.1</u>	<u>BGS Boreholes</u>			2		
Page	Section	Natural ground subsidence					
<u>65</u>	<u>17.1</u>	<u>Shrink swell clays</u>	Low (within 50m)				
<u>66</u>	<u>17.2</u>	<u>Running sands</u>	Moderate (within 50m)				
<u>67</u>	<u>17.3</u>	<u>Compressible deposits</u>	Moderate (within 50m)				
<u>68</u>	<u>17.4</u>	<u>Collapsible deposits</u>	Negligible (within 50m)				
<u>69</u>	<u>17.5</u>	<u>Landslides</u>	Very low (within 50m)				
<u>70</u>	<u>17.6</u>	<u>Ground dissolution of soluble rocks</u>	Negligible (within 50m)				
Page	Section	Mining, ground workings and natural cavities	On site	0-50m	50-250m	250-500m	500-2000m
<u>72</u>	<u>18.3</u>	<u>Surface ground workings</u>			1		



Page	Section	Radon					
<u>75</u>	<u>19.1</u>	<u>Radon</u>	Less than 1% (within 0m)				
Page	Section	Soil chemistry	On site	0-50m	50-250m	250-500m	500-2000m
<u>76</u>	<u>20.1</u>	<u>BGS Estimated Background Soil Chemistry</u>	1	1			
Page	Section	Railway infrastructure and projects	On site	0-50m	50-250m	250-500m	500-2000m



Recent aerial photograph




Aerial photography supplied by Getmapping PLC. © Copyright Getmapping PLC. All Rights Reserved.

Capture Date: 05/05/2018

Site Area: 1.11ha



Recent site history - 2015 aerial photograph

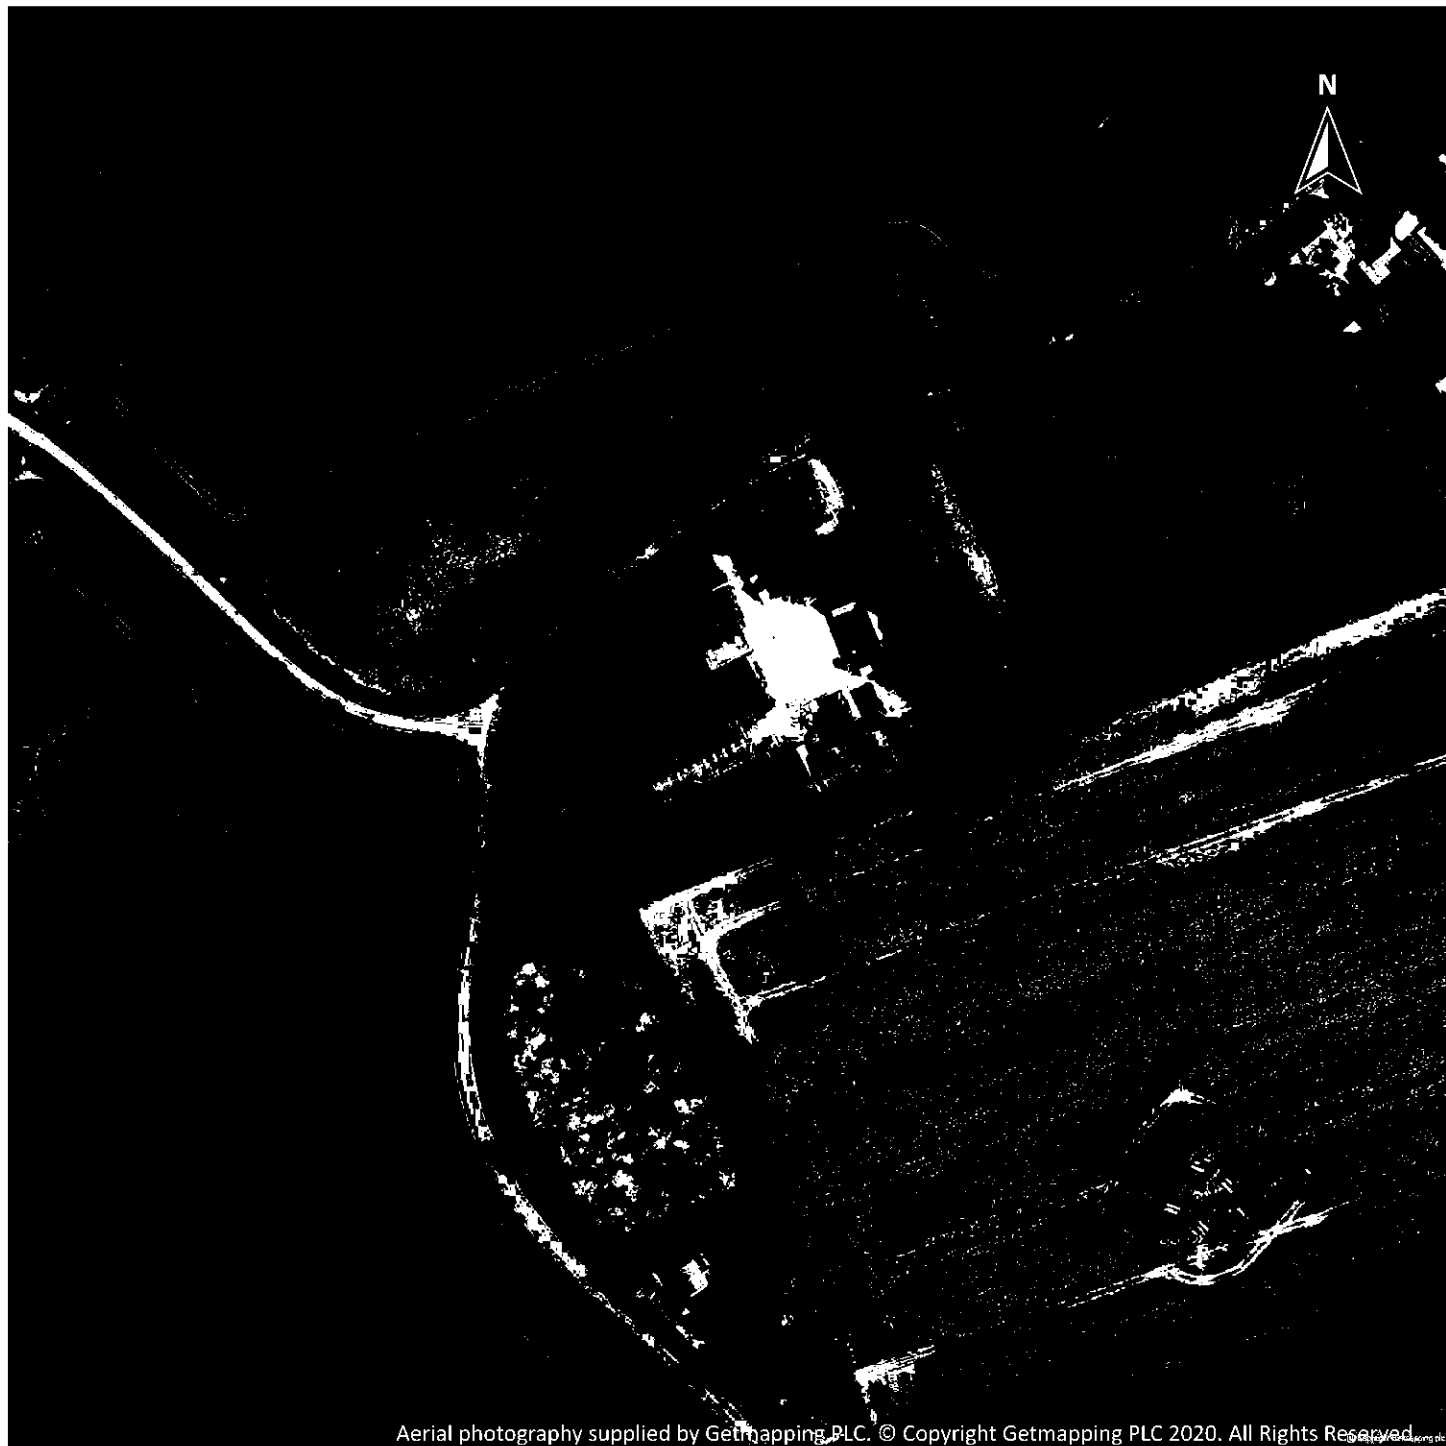

Aerial photography supplied by Getmapping PLC. © Copyright Getmapping PLC 2020. All Rights Reserved.

Capture Date: 06/04/2015

Site Area: 1.11ha



Recent site history - 2007 aerial photograph




Capture Date: 22/05/2007

Site Area: 1.11ha



Recent site history - 2000 aerial photograph

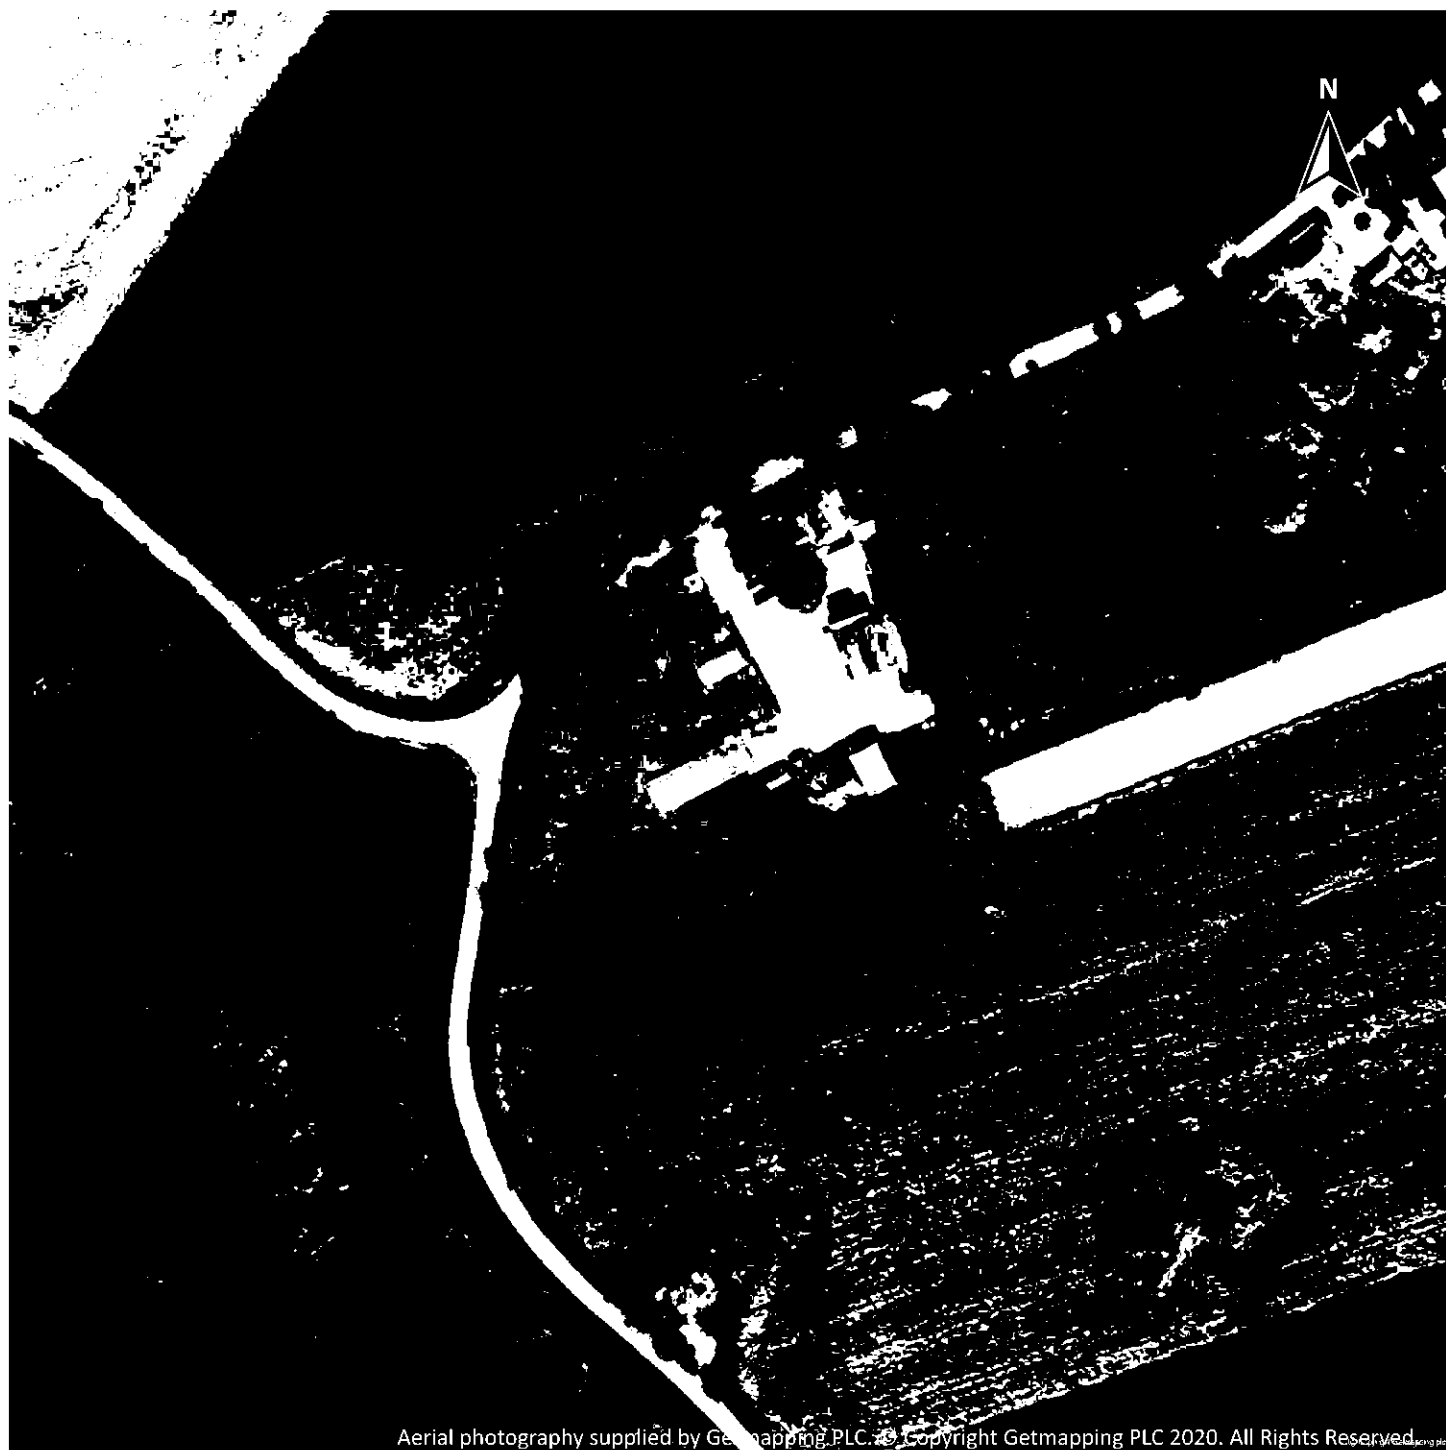

Aerial photography supplied by Getmapping PLC. © Copyright Getmapping PLC 2020. All Rights Reserved

Capture Date: 14/07/2000


Site Area: 1.11ha



Contact us with any questions at:
info@groundsure.com
08444 159 000

Date: 7 September 2020

Recent site history - 1999 aerial photograph

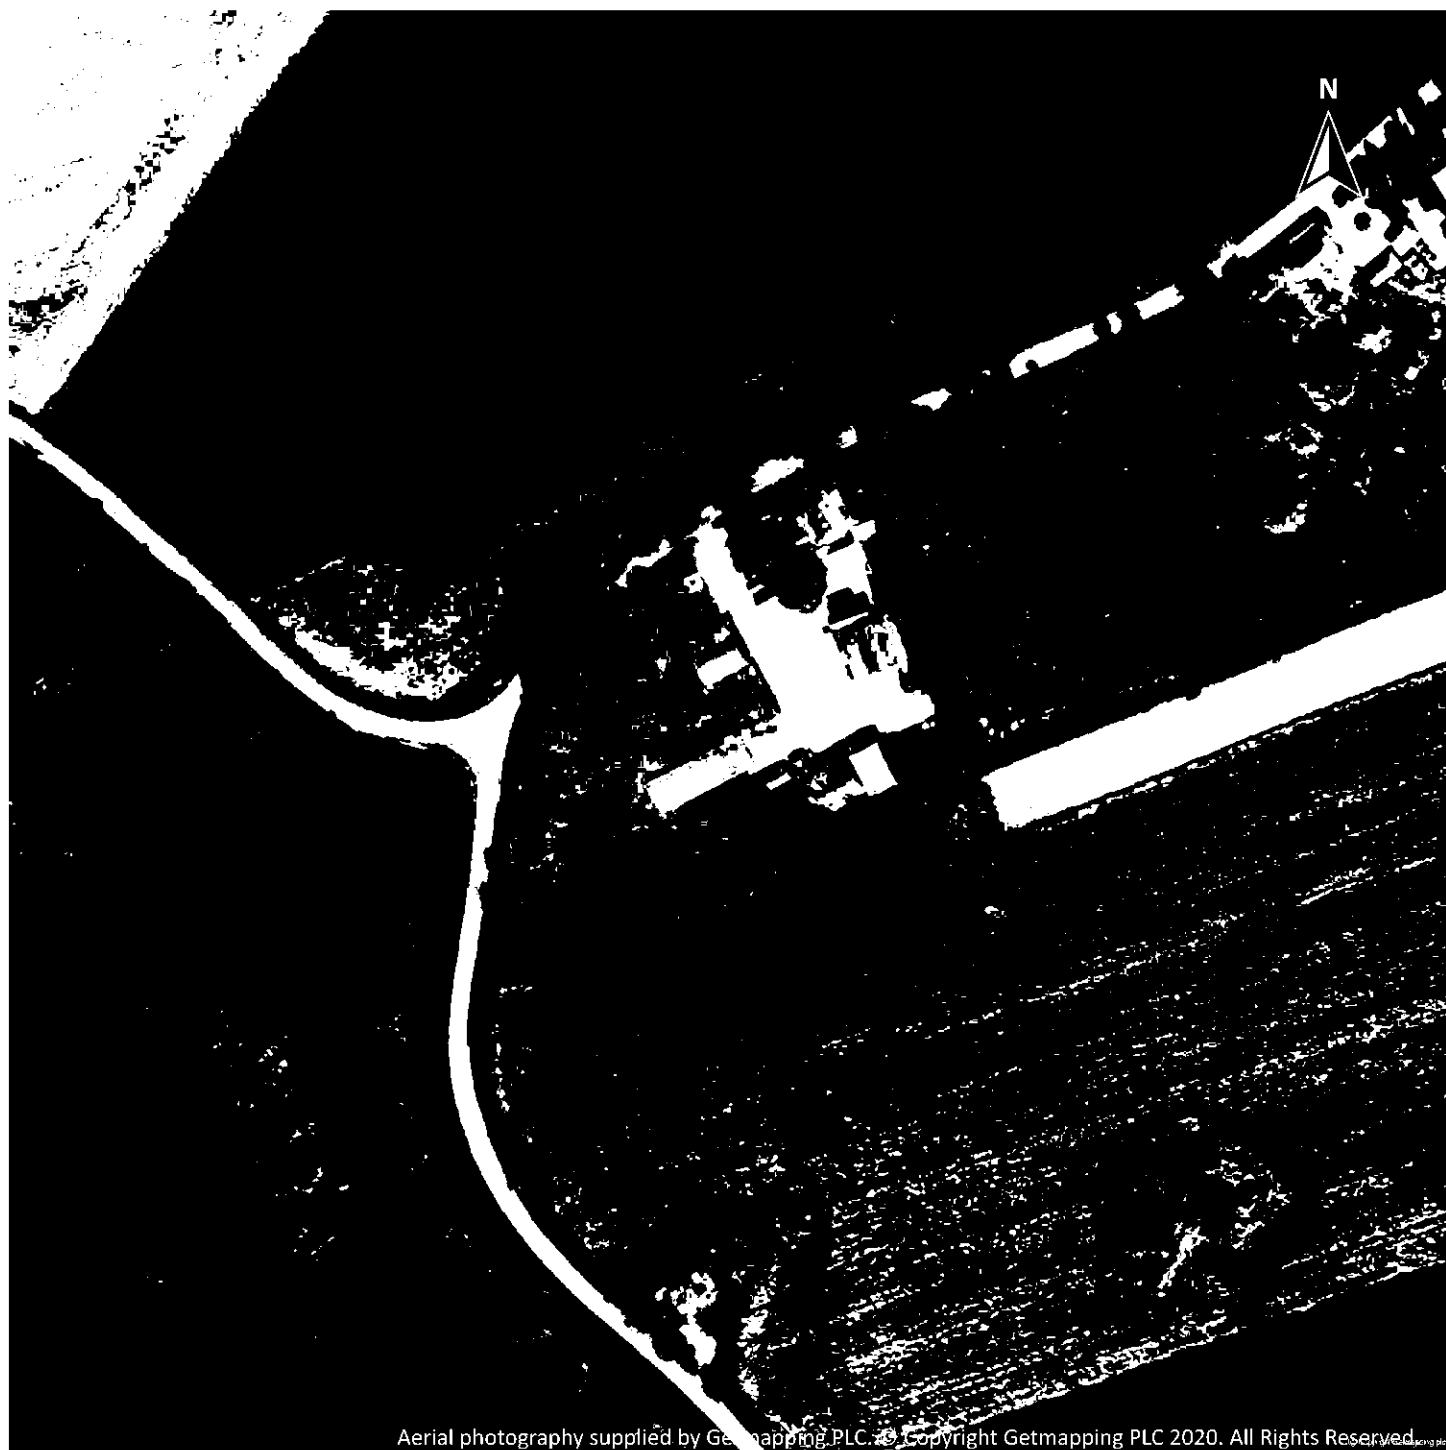


Capture Date: 25/06/1999

Site Area: 1.11ha



OS MasterMap site plan

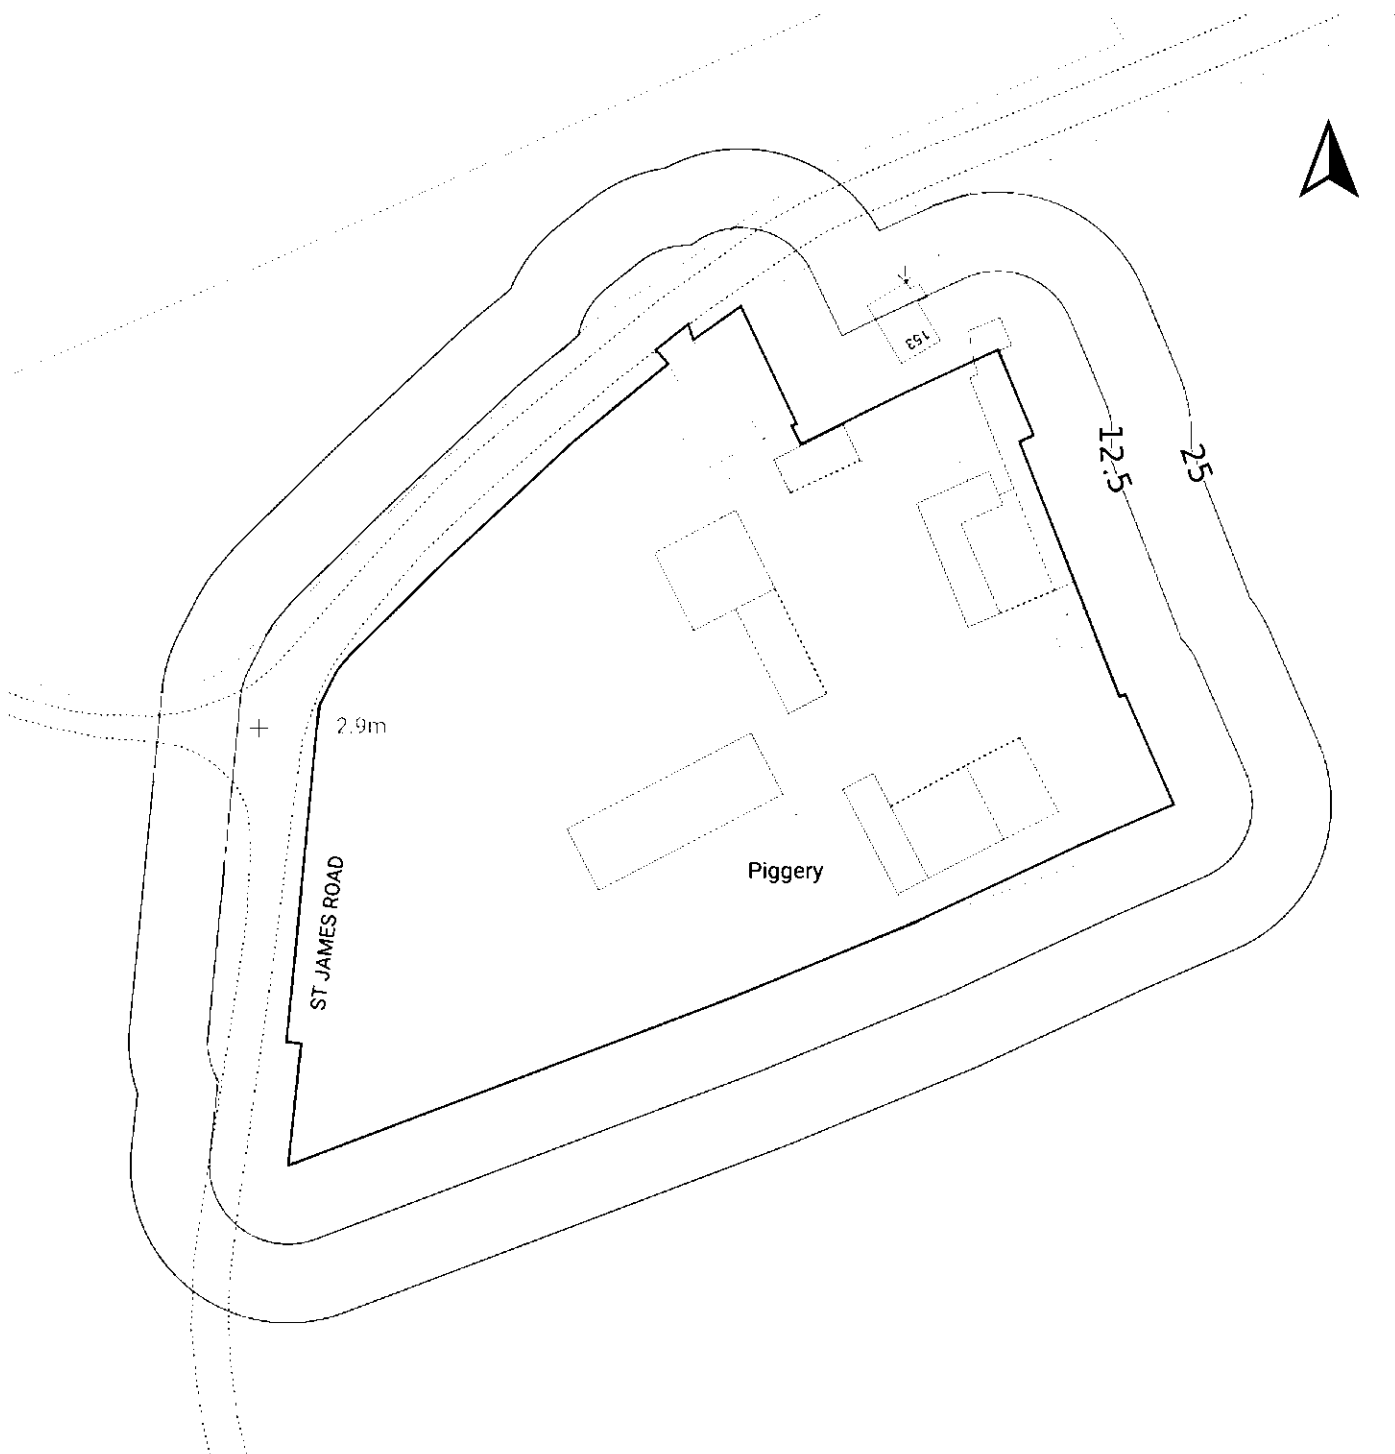

Site Area: 1.11ha



1 Past land use

1.1 Historical industrial land uses

Records within 500m

0

Potentially contaminative land use features digitised from historical Ordnance Survey mapping at 1:10,000 and 1:10,560 scale, intelligently grouped into contiguous features. To prevent misrepresentation of the size of historical features at any given time, features are only grouped if they have similar geometries within immediately preceding or succeeding map editions. See section 2 for a breakdown of grouping if required. Grouped and the original un-grouped features can be cross-referenced across sections 1 and 2 using the 'Group ID'.

1.2 Historical tanks

Records within 500m

0

Tank features digitised from historical Ordnance Survey mapping at high-detail 1:1,250 and 1:2,500 scale, intelligently grouped into contiguous features. To prevent misrepresentation of the size of historical features at any given time, features are only grouped if they have similar geometries within immediately preceding or succeeding map editions. See section 2 for a breakdown of grouping if required. Grouped and the original un-grouped features can be cross-referenced across sections 1 and 2 using the 'Group ID'.

1.3 Historical energy features

Records within 500m

0

Energy features digitised from historical Ordnance Survey mapping at high-detail 1:1,250 and 1:2,500 scale, intelligently grouped into contiguous features. To prevent misrepresentation of the size of historical features at any given time, features are only grouped if they have similar geometries within immediately preceding or succeeding map editions. See section 2 for a breakdown of grouping if required. Grouped and the original un-grouped features can be cross-referenced across sections 1 and 2 using the 'Group ID'.



1.4 Historical petrol stations

Records within 500m

0

Petrol stations digitised from historical Ordnance Survey mapping at high-detail 1:1,250 and 1:2,500 scale, intelligently grouped into contiguous features. To prevent misrepresentation of the size of historical features at any given time, features are only grouped if they have similar geometries within immediately preceding or succeeding map editions. See section 2 for a breakdown of grouping if required. Grouped and the original ungrouped features can be cross-referenced across sections 1 and 2 using the 'Group ID'.

1.5 Historical garages

Records within 500m

0

Garages digitised from historical Ordnance Survey mapping at high-detail 1:1,250 and 1:2,500 scale, intelligently grouped into contiguous features. To prevent misrepresentation of the size of historical features at any given time, features are only grouped if they have similar geometries within immediately preceding or succeeding map editions. See section 2 for a breakdown of grouping if required. Grouped and the original ungrouped features can be cross-referenced across sections 1 and 2 using the 'Group ID'.

1.6 Historical military land

Records within 500m

0

Areas of military land digitised from multiple sources including the National Archives, local records, MOD records and verified other sources, intelligently grouped into contiguous features.



2 Past land use - un-grouped

2.1 Historical industrial land uses

Records within 500m

0

Potentially contaminative land use features digitised from historical Ordnance Survey mapping at 1:10,000 and 10,560 scale. Any records shown are available intelligently grouped in section 1. Grouped and the original un-grouped features can be cross-referenced across sections 1 and 2 using the 'Group ID'.

2.2 Historical tanks

Records within 500m

0

Tank features digitised from historical Ordnance Survey mapping at high-detail 1:1,250 and 1:2,500 scale. Any records shown are available intelligently grouped in section 1. Grouped and the original un-grouped features can be cross-referenced across sections 1 and 2 using the 'Group ID'.

2.3 Historical energy features

Records within 500m

0

Energy features digitised from historical Ordnance Survey mapping at high-detail 1:1,250 and 1:2,500 scale. Any records shown are available intelligently grouped in section 1. Grouped and the original un-grouped features can be cross-referenced across sections 1 and 2 using the 'Group ID'.

2.4 Historical petrol stations

Records within 500m

0

Petrol stations digitised from historical Ordnance Survey mapping at high-detail 1:1,250 and 1:2,500 scale. Any records shown are available intelligently grouped in section 1. Grouped and the original un-grouped features can be cross-referenced across sections 1 and 2 using the 'Group ID'.

2.5 Historical garages

Records within 500m

0

Garages digitised from historical Ordnance Survey mapping at high-detail 1:1,250 and 1:2,500 scale. Any records shown are available intelligently grouped in section 1. Grouped and the original un-grouped features can be cross-referenced across sections 1 and 2 using the 'Group ID'.



3 Waste and landfill

3.1 Active or recent landfill

Records within 500m 0

Active or recently closed landfill sites under Environment Agency/Natural Resources Wales regulation.

3.2 Historical landfill (BGS records)

Records within 500m 0

Landfill sites identified on a survey carried out on behalf of the DoE in 1973. These sites may have been closed or operational at this time.

3.3 Historical landfill (LA/mapping records)

Records within 500m 0

Landfill sites identified from Local Authority records and high detail historical mapping.

3.4 Historical landfill (EA/NRW records)

Records within 500m 0

Known historical (closed) landfill sites (e.g. sites where there is no PPC permit or waste management licence currently in force). This includes sites that existed before the waste licensing regime and sites that have been licensed in the past but where a licence has been revoked, ceased to exist or surrendered and a certificate of completion has been issued.

3.5 Historical waste sites

Records within 500m 0

Waste site records derived from Local Authority planning records and high detail historical mapping.



3.6 Licensed waste sites

Records within 500m

0

Active or recently closed waste sites under Environment Agency/Natural Resources Wales regulation.

3.7 Waste exemptions


Records within 500m

0

Activities involving the storage, treatment, use or disposal of waste that are exempt from needing a permit. Exemptions have specific limits and conditions that must be adhered to.



4 Current industrial land use

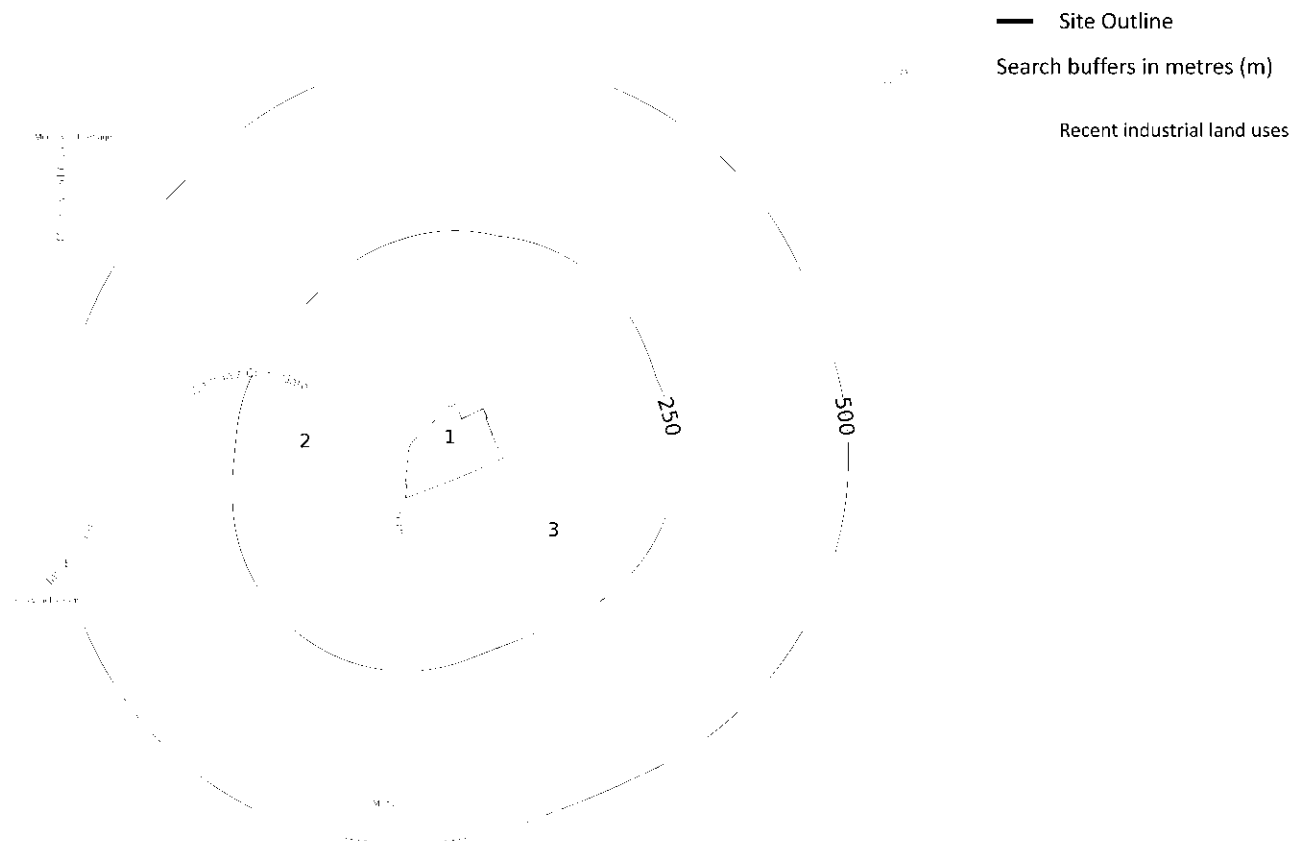

© Crown copyright and database rights 2020. Ordnance Survey licence 100035207

4.1 Recent industrial land uses

Records within 250m

3

Current potentially contaminative industrial sites.

Features are displayed on the Current industrial land use map on **page 20**

ID	Location	Company	Address	Activity	Category
1	On site	Piggery	Lincolnshire, PE12	Livestock Farming	Farming



4.2 Current or recent petrol stations

Records within 500m 0

Open, closed, under development and obsolete petrol stations.

4.3 Electricity cables

Records within 500m 0

High voltage underground electricity transmission cables.

4.4 Gas pipelines

Records within 500m 0

High pressure underground gas transmission pipelines.

4.5 Sites determined as Contaminated Land

Records within 500m 0

Contaminated Land Register of sites designated under Part 2a of the Environmental Protection Act 1990.

4.6 Control of Major Accident Hazards (COMAH)

Records within 500m 0

Control of Major Accident Hazards (COMAH) sites. This data includes upper and lower tier sites, and includes a historical archive of COMAH sites and Notification of Installations Handling Hazardous Substances (NIHHS) records.



4.7 Regulated explosive sites

Records within 500m 0

Sites registered and licensed by the Health and Safety Executive under the Manufacture and Storage of Explosives Regulations 2005 (MSER). The last update to this data was in April 2011.

4.8 Hazardous substance storage/usage

Records within 500m 0

Consents granted for a site to hold certain quantities of hazardous substances at or above defined limits in accordance with the Planning (Hazardous Substances) Regulations 2015.

4.9 Historical licensed industrial activities (IPC)

Records within 500m 0

Integrated Pollution Control (IPC) records of substance releases to air, land and water. This data represents a historical archive as the IPC regime has been superseded.

4.10 Licensed industrial activities (Part A(1))

Records within 500m 0

Records of Part A(1) installations regulated under the Environmental Permitting (England and Wales) Regulations 2016 for the release of substances to the environment.

4.11 Licensed pollutant release (Part A(2)/B)

Records within 500m 0

Records of Part A(2) and Part B installations regulated under the Environmental Permitting (England and Wales) Regulations 2016 for the release of substances to the environment.



4.12 Radioactive Substance Authorisations

Records within 500m 0

Records of the storage, use, accumulation and disposal of radioactive substances regulated under the Radioactive Substances Act 1993.

4.13 Licensed Discharges to controlled waters

Records within 500m 0

Discharges of treated or untreated effluent to controlled waters under the Water Resources Act 1991.

4.14 Pollutant release to surface waters (Red List)

Records within 500m 0

Discharges of specified substances under the Environmental Protection (Prescribed Processes and Substances) Regulations 1991.

4.15 Pollutant release to public sewer

Records within 500m 0

Discharges of Special Category Effluents to the public sewer.

4.16 List 1 Dangerous Substances

Records within 500m 0

Discharges of substances identified on List I of European Directive E 2006/11/EC, and regulated under the Environmental Damage (Prevention and Remediation) Regulations 2015.



4.17 List 2 Dangerous Substances

Records within 500m

0

Discharges of substances identified on List II of European Directive E 2006/11/EC, and regulated under the Environmental Damage (Prevention and Remediation) Regulations 2015.

4.18 Pollution Incidents (EA/NRW)

Records within 500m

0

Records of substantiated pollution incidents. Since 2006 this data has only included category 1 (major) and 2 (significant) pollution incidents.

4.19 Pollution inventory substances

Records within 500m

0

The pollution inventory (substances) includes reporting on annual emissions of certain regulated substances to air, controlled waters and land. A reporting threshold for each substance is also included. Where emissions fall below the reporting threshold, no value will be given. The data is given for the most recent complete year available.

4.20 Pollution inventory waste transfers

Records within 500m

0

The pollution inventory (waste transfers) includes reporting on annual transfers and recovery/disposal of controlled wastes from a site. A reporting threshold for each waste type is also included. Where releases fall below the reporting threshold, no value will be given. The data is given for the most recent complete year available.

4.21 Pollution inventory radioactive waste


Records within 500m

0

The pollution inventory (radioactive wastes) includes reporting on annual releases of radioactive substances from a site, including the means of release. Where releases fall below the reporting threshold, no value will be given. The data is given for the most recent complete year available.



5 Hydrogeology - Superficial aquifer

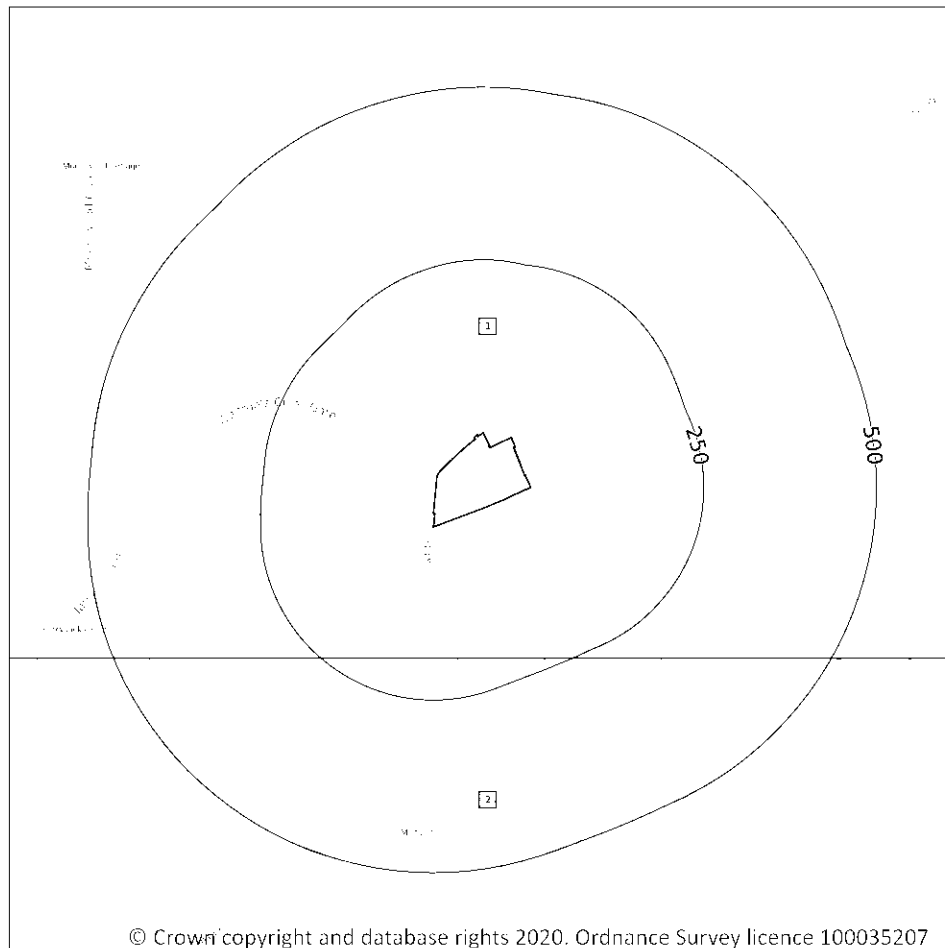

- Site Outline
- Search buffers in metres (m)
- ☐ Principal
 - ☐ Secondary A
 - ☐ Secondary B
 - ☐ Secondary Undifferentiated
 - ☐ Unproductive
 - ☐ Unknown

5.1 Superficial aquifer

Records within 500m

2


Aquifer status of groundwater held within superficial geology.

Features are displayed on the Hydrogeology map on **page 25**

ID	Location	Designation	Description
1	On site	Unproductive	These are rock layers or drift deposits with low permeability that have negligible significance for water supply or river base flow



Bedrock aquifer

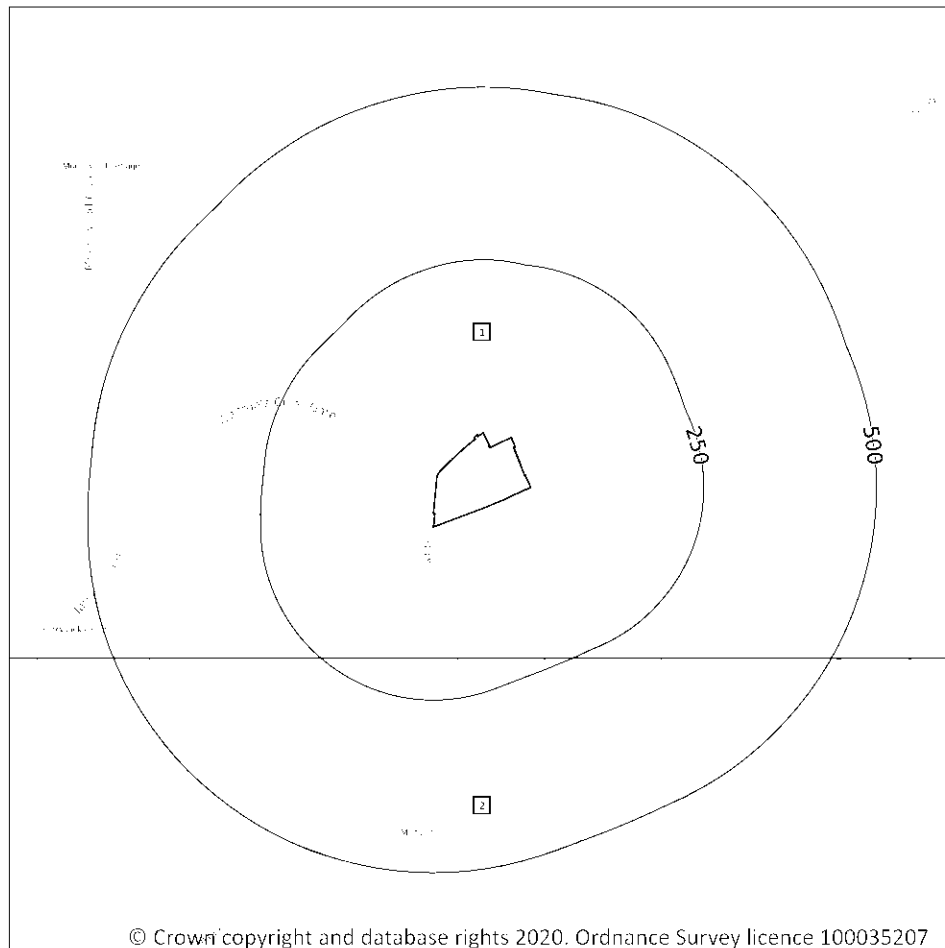

5.2 Bedrock aquifer

Records within 500m

2


Aquifer status of groundwater held within bedrock geology.

Features are displayed on the Bedrock aquifer map on **page 26**

ID	Location	Designation	Description
1	On site	Unproductive	These are rock layers or drift deposits with low permeability that have negligible significance for water supply or river base flow



Groundwater vulnerability

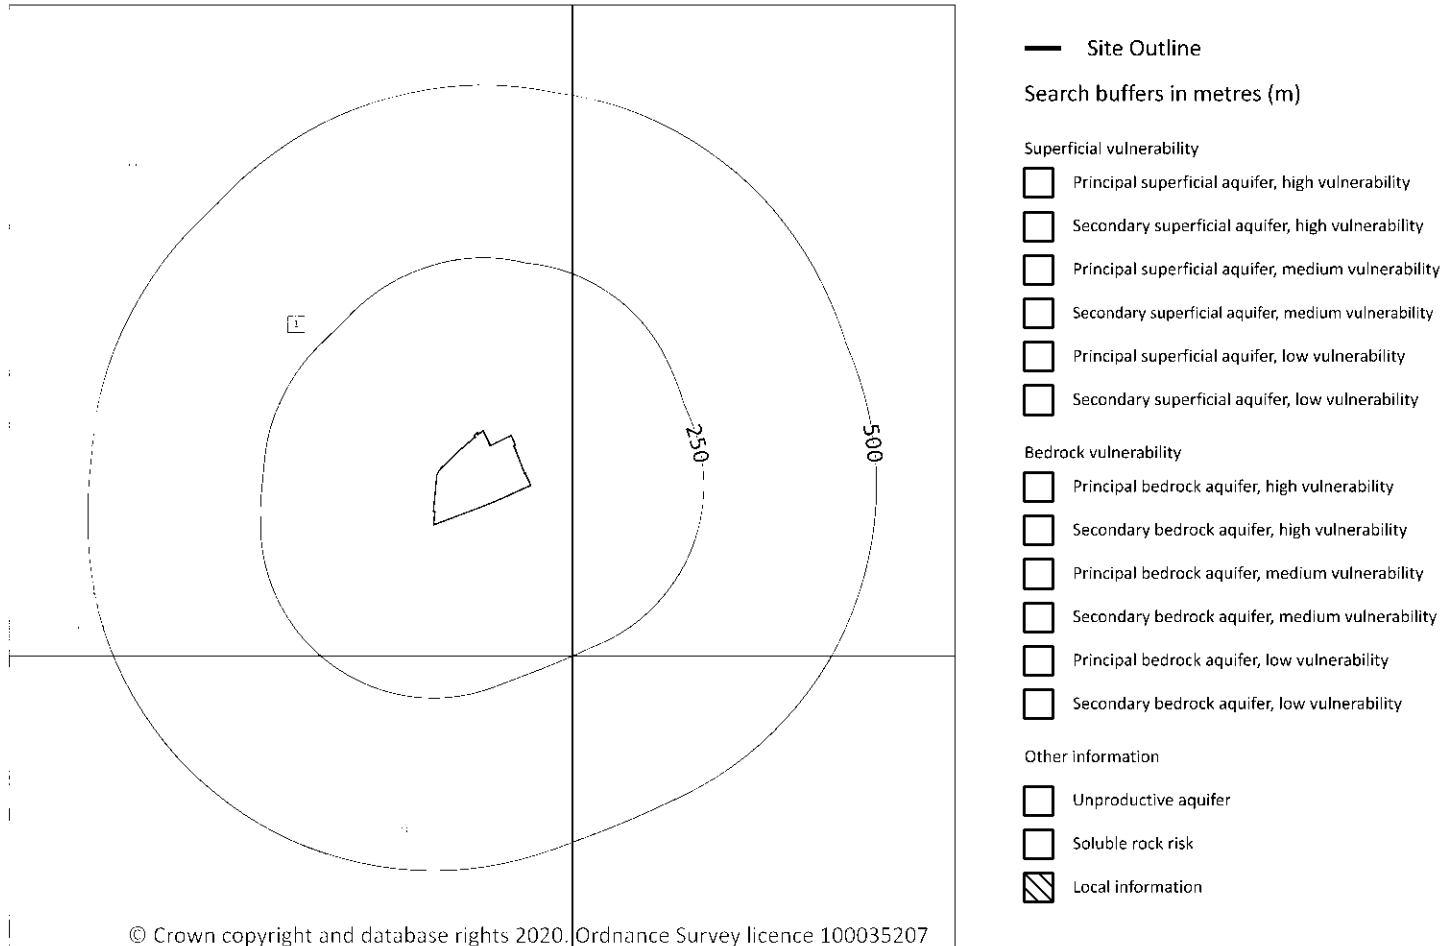

5.3 Groundwater vulnerability

Records within 50m

1

An assessment of the vulnerability of groundwater to a pollutant discharged at ground level based on the hydrological, geological, hydrogeological and soil properties within a one kilometre square grid. Groundwater vulnerability is described as High, Medium or Low as follows:

High - Areas able to easily transmit pollution to groundwater. They are likely to be characterised by high leaching soils and the absence of low permeability superficial deposits.

Medium - Intermediate between high and low vulnerability.

Low - Areas that provide the greatest protection from pollution. They are likely to be characterised by low leaching soils and/or the presence of superficial deposits characterised by a low permeability.

Features are displayed on the Groundwater vulnerability map on **page 27**



ID	Location	Summary	Soil / surface	Superficial geology	Bedrock geology
1	On site	Summary Classification: Unproductive aquifer (may have productive aquifer beneath) Combined classification: Unproductive Bedrock Aquifer, Unproductive Superficial Aquifer	Leaching class: High Infiltration value: >70% Dilution value: <300mm/year	Vulnerability: Unproductive Aquifer type: Unproductive Thickness: >10m Patchiness value: >90% Recharge potential: Low	Vulnerability: Unproductive Aquifer type: Unproductive Flow mechanism: Well connected fractures

5.4 Groundwater vulnerability- soluble rock risk

Records on site

0

This dataset identifies areas where solution features that enable rapid movement of a pollutant may be present within a 1km grid square.

5.5 Groundwater vulnerability- local information

Records on site

0

This dataset identifies areas where additional local information affecting vulnerability is held by the Environment Agency. Further information can be obtained by contacting the Environment Agency local Area groundwater team through the Environment Agency National Customer Call Centre on 03798 506 506 or by email on enquiries@environment-agency.gov.uk.

Abstractions and Source Protection Zones

5.6 Groundwater abstractions

Records within 2000m **0**

Licensed groundwater abstractions for sites extracting more than 20 cubic metres of water a day and includes active and historical records. The data may be for a single abstraction point, between two points (line data) or a larger area.

5.7 Surface water abstractions

Records within 2000m **0**

Licensed surface water abstractions for sites extracting more than 20 cubic metres of water a day and includes active and historical records. The data may be for a single abstraction point, a stretch of watercourse or a larger area.

5.8 Potable abstractions

Records within 2000m **0**

Licensed potable water abstractions for sites extracting more than 20 cubic metres of water a day and includes active and historical records. The data may be for a single abstraction point, a stretch of watercourse or a larger area.

5.9 Source Protection Zones

Records within 500m **0**

Source Protection Zones define the sensitivity of an area around a potable abstraction site to contamination.



5.10 Source Protection Zones (confined aquifer)


Records within 500m

0

Source Protection Zones in the confined aquifer define the sensitivity around a deep groundwater abstraction to contamination. A confined aquifer would normally be protected from contamination by overlying geology and is only considered a sensitive resource if deep excavation/drilling is taking place.



6 Hydrology

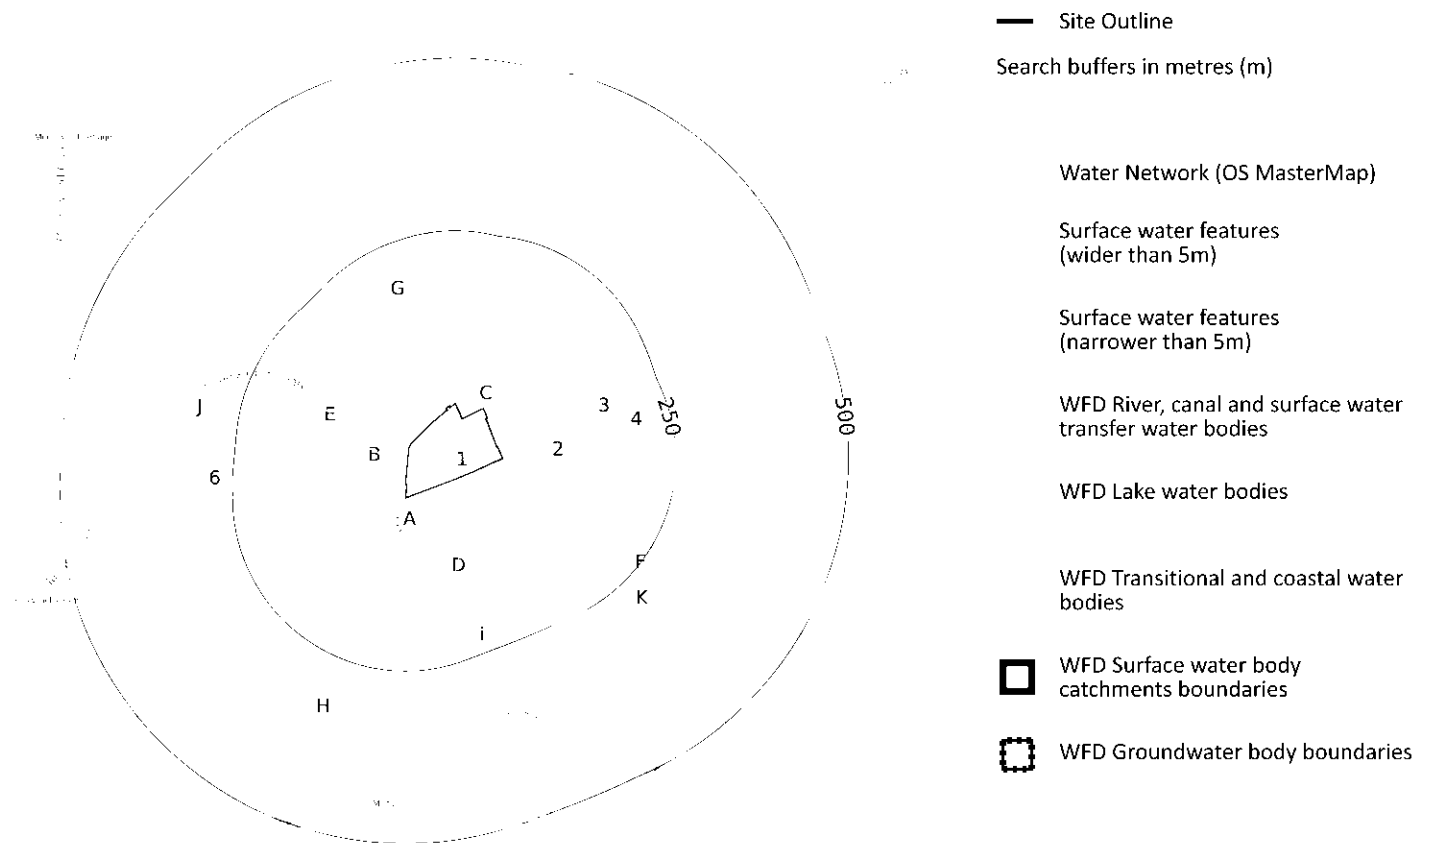

© Crown copyright and database rights 2020. Ordnance Survey licence 100035207

6.1 Water Network (OS MasterMap)

Records within 250m

34

Detailed water network of Great Britain showing the flow and precise central course of every river, stream, lake and canal.

Features are displayed on the Hydrology map on **page 31**

ID	Location	Type of water feature	Ground level	Permanence	Name
A	On site	Inland river not influenced by normal tidal action.	On ground surface	Watercourse contains water year round (in normal circumstances)	-



ID	Location	Type of water feature	Ground level	Permanence	Name
----	----------	-----------------------	--------------	------------	------



ID	Location	Type of water feature	Ground level	Permanence	Name
----	----------	-----------------------	--------------	------------	------



ID	Location	Type of water feature	Ground level	Permanence	Name
----	----------	-----------------------	--------------	------------	------

6.2 Surface water features

Records within 250m **19**

Covering rivers, streams and lakes (some overlap with OS MasterMap Water Network data in previous section) but additionally covers smaller features such as ponds. Rivers and streams narrower than 5m are represented as a single line. Lakes, ponds and rivers or streams wider than 5m are represented as polygons.

Features are displayed on the Hydrology map on **page 31**

6.3 WFD Surface water body catchments

Records on site **1**

The Water Framework Directive is an EU-led framework for the protection of inland surface waters, estuaries, coastal waters and groundwater through river basin-level management planning. In terms of surface water, these basins are broken down into smaller units known as management, operational and water body catchments.



Features are displayed on the Hydrology map on **page 31**

ID	Location	Type	Water body catchment	Water body ID	Operational catchment	Management catchment
1	On site	River WB catchment	South Holland Main Drain	GB205032050405	Lower Nene	Nene

6.4 WFD Surface water bodies

Records identified

1

Surface water bodies under the Directive may be rivers, lakes, estuary or coastal. To achieve the purpose of the Directive, environmental objectives have been set and are reported on for each water body. The progress towards delivery of the objectives is then reported on by the relevant competent authorities at the end of each six-year cycle. The river water body directly associated with the catchment listed in the previous section is detailed below, along with any lake, canal, coastal or artificial water body within 250m of the site. Click on the water body ID in the table to visit the EA Catchment Explorer to find out more about each water body listed.

Features are displayed on the Hydrology map on **page 31**

ID	Location	Type	Name	Water body ID	Overall rating	Chemical rating	Ecological rating	Year
----	----------	------	------	---------------	----------------	-----------------	-------------------	------

6.5 WFD Groundwater bodies


Records on site

0

Groundwater bodies are also covered by the Directive and the same regime of objectives and reporting detailed in the previous section is in place. Click on the water body ID in the table to visit the EA Catchment Explorer to find out more about each groundwater body listed.



7 River and coastal flooding

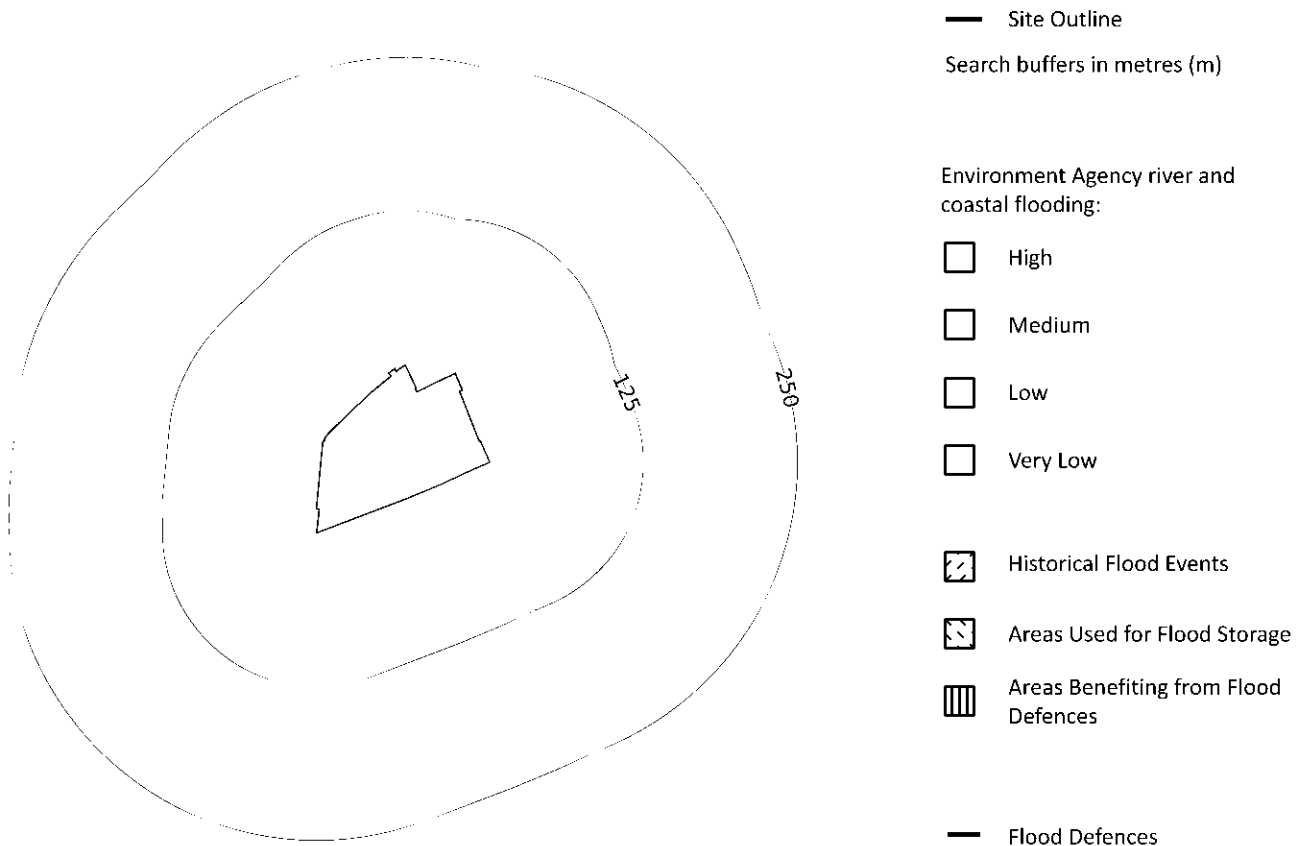

© Crown copyright and database rights 2020. Ordnance Survey licence 100035207

7.1 Risk of Flooding from Rivers and Sea (RoFRaS)

Records within 50m

1

The chance of flooding from rivers and/or the sea in any given year, based on cells of 50m. Each cell is allocated one of four flood risk categories, taking into account flood defences and their condition; Very low (less than 1 in 1000 chance in any given year), Low (less than 1 in 100 but greater than or equal to 1 in 1000 chance), Medium (less than 1 in 30 but greater than or equal to 1 in 100 chance) or High (greater than or equal to 1 in 30 chance).

Features are displayed on the River and coastal flooding map on **page 36**

Distance RoFRaS flood risk

On site Low



7.2 Historical Flood Events

Records within 250m

0

Records of historic flooding from rivers, the sea, groundwater and surface water. Records began in 1946 when predecessor bodies started collecting detailed information about flooding incidents, although limited details may be included on flooding incidents prior to this date. Takes into account the presence of defences, structures, and other infrastructure where they existed at the time of flooding, and includes flood extents that may have been affected by overtopping, breaches or blockages.

7.3 Flood Defences

Records within 250m

0

Records of flood defences owned, managed or inspected by the Environment Agency and Natural Resources Wales. Flood defences can be structures, buildings or parts of buildings. Typically these are earth banks, stone and concrete walls, or sheet-piling that is used to prevent or control the extent of flooding.

7.4 Areas Benefiting from Flood Defences

Records within 250m

0

Areas that would benefit from the presence of flood defences in a 1 in 100 (1%) chance of flooding each year from rivers or 1 in 200 (0.5%) chance of flooding each year from the sea.

7.5 Flood Storage Areas


Records within 250m

0

Areas that act as a balancing reservoir, storage basin or balancing pond to attenuate an incoming flood peak to a flow level that can be accepted by the downstream channel or to delay the timing of a flood peak so that its volume is discharged over a longer period.



River and coastal flooding - Flood Zones

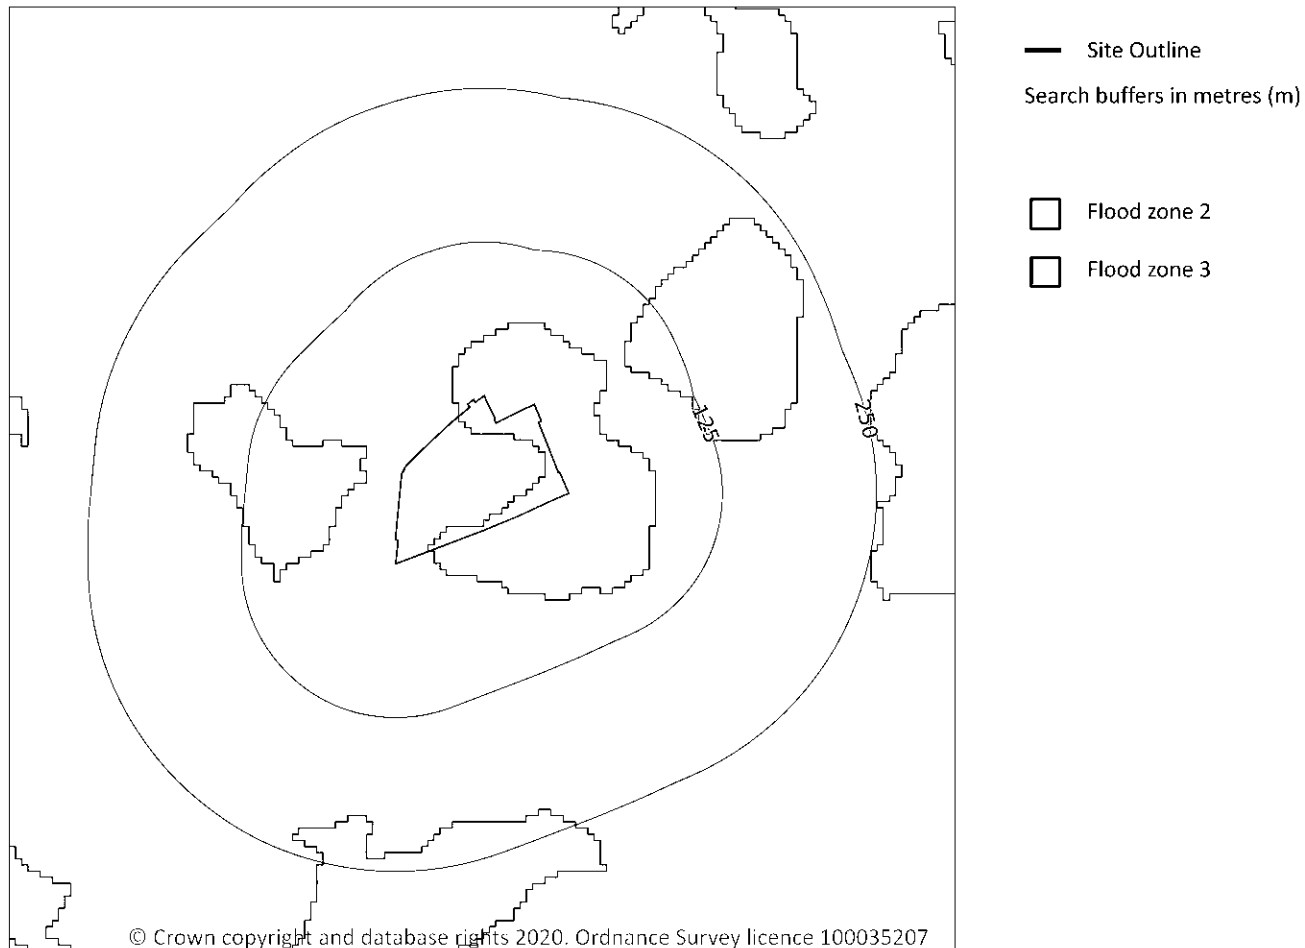

7.6 Flood Zone 2

Records within 50m

1

Areas of land at risk of flooding, when the presence of flood defences are ignored. Covering land between Flood Zone 3 (see next section) and the extent of the flooding from rivers or the sea with a 1 in 1000 (0.1%) chance of flooding each year.

Features are displayed on the River and coastal flooding map on **page 36**

Location Type

On site Zone 2 - (Fluvial /Tidal Models)



7.7 Flood Zone 3

Records within 50m

1

Areas of land at risk of flooding, when the presence of flood defences are ignored. Covering land with a 1 in 100 (1%) or greater chance of flooding each year from rivers or a 1 in 200 (0.5%) or greater chance of flooding each year from the sea.


Features are displayed on the River and coastal flooding map on **page 36**

Location Type

On site **Zone 3 - (Fluvial Models)**



8 Surface water flooding

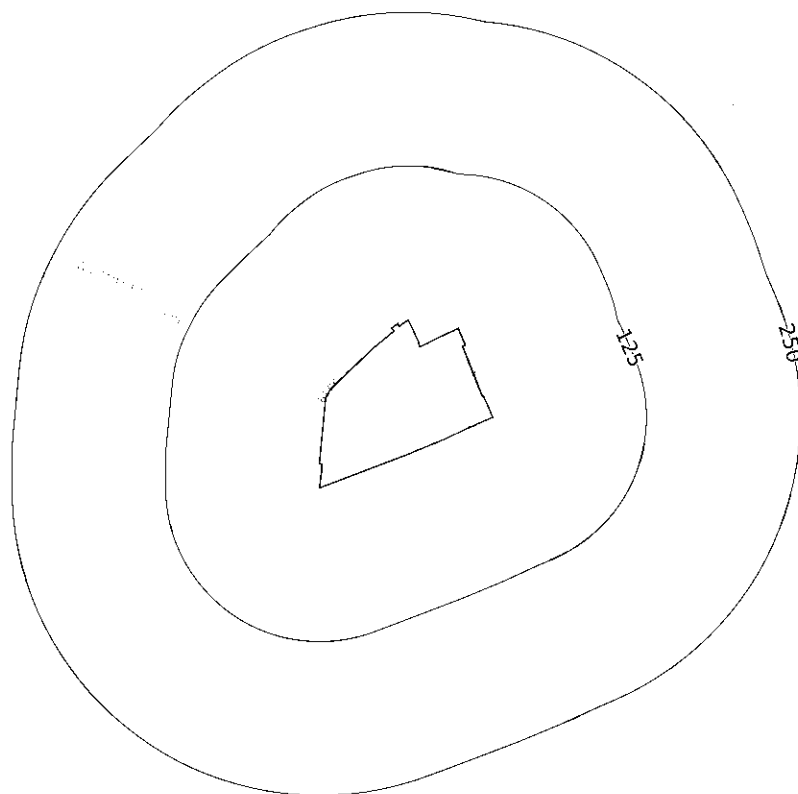

© Crown copyright and database rights 2020. Ordnance Survey licence 100035207

— Site Outline

Search buffers in metres (m)

1 in 1000 return period

- ☐ Depth between 0.1m - 0.3m
- ☐ Depth between 0.3m - 1.0m
- ☐ Depth greater than 1.0m

1 in 250 return period

- ☐ Depth between 0.1m - 0.3m
- ☐ Depth between 0.3m - 1.0m
- ☐ Depth greater than 1.0m

1 in 100 return period

- ☐ Depth between 0.1m - 0.3m
- ☐ Depth between 0.3m - 1.0m
- ☐ Depth greater than 1.0m

1 in 30 return period

- ☐ Depth between 0.1m - 0.3m
- ☐ Depth between 0.3m - 1.0m
- ☐ Depth greater than 1.0m

8.1 Surface water flooding

Highest risk on site

1 in 100 year, 0.3m - 1.0m

Highest risk within 50m

1 in 30 year, 0.1m - 0.3m

Ambiental Risk Analytics surface water (pluvial) FloodMap identifies areas likely to flood as a result of extreme rainfall events, i.e. land naturally vulnerable to surface water ponding or flooding. This data set was produced by simulating 1 in 30 year, 1 in 100 year, 1 in 250 year and 1 in 1,000 year rainfall events. Modern urban drainage systems are typically built to cope with rainfall events between 1 in 20 and 1 in 30 years, though some older ones may flood in a 1 in 5 year rainfall event.

Features are displayed on the Surface water flooding map on **page 40**

The data shown on the map and in the table above shows the highest likelihood of flood events happening at the site. Lower likelihood events may have greater flood depths and hence a greater potential impact on a site.




The table below shows the maximum flood depths for a range of return periods for the site.

Return period

Maximum modelled depth



9 Groundwater flooding

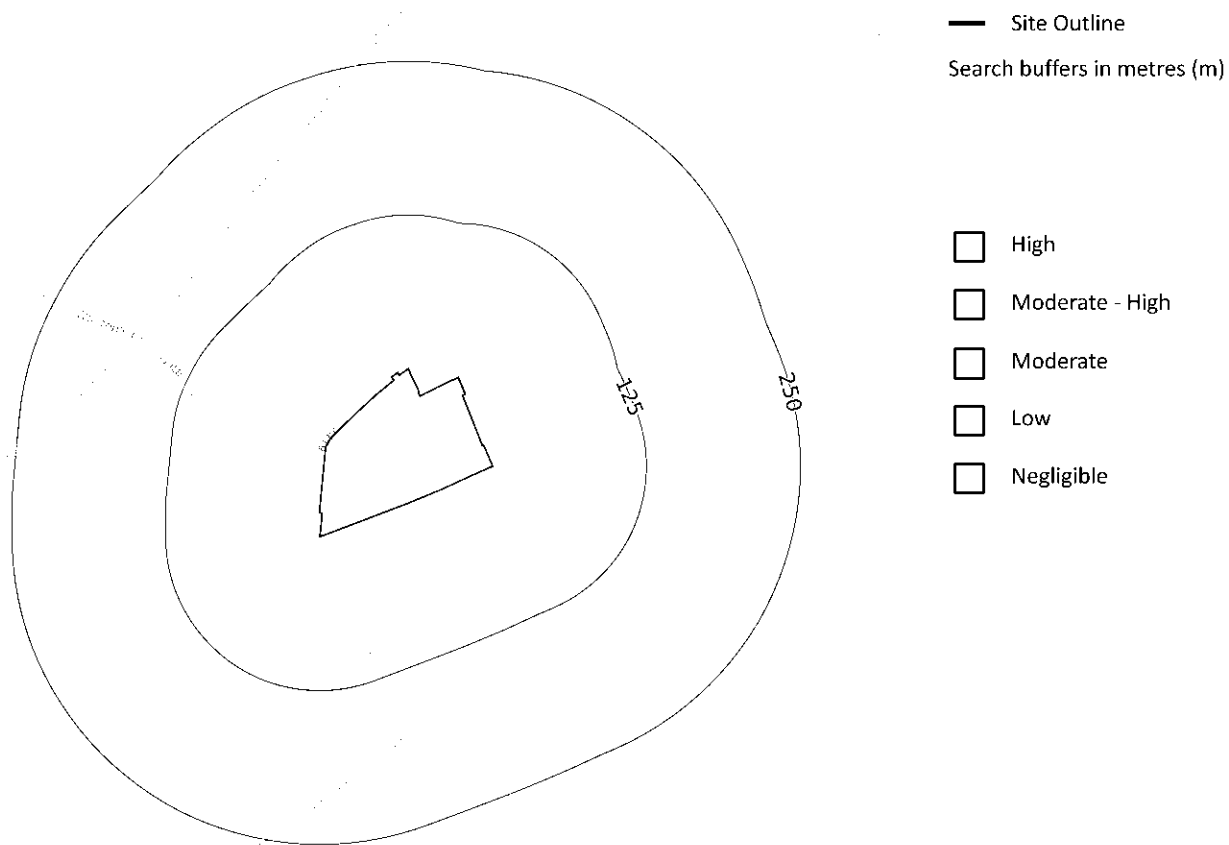

© Crown copyright and database rights 2020. Ordnance Survey licence 100035207

9.1 Groundwater flooding

Highest risk on site

Negligible

Highest risk within 50m

Negligible

Groundwater flooding is caused by unusually high groundwater levels. It occurs when the water table rises above the ground surface or within underground structures such as basements or cellars. Groundwater flooding tends to exhibit a longer duration than surface water flooding, possibly lasting for weeks or months, and as a result it can cause significant damage to property. This risk assessment is based on a 1 in 100 year return period and a 5m Digital Terrain Model (DTM).

Features are displayed on the Groundwater flooding map on **page 42**



10 Environmental designations

10.1 Sites of Special Scientific Interest (SSSI)

Records within 2000m

0

Sites providing statutory protection for the best examples of UK flora, fauna, or geological or physiographical features. Originally notified under the National Parks and Access to the Countryside Act 1949, SSSIs were re-notified under the Wildlife and Countryside Act 1981. Improved provisions for the protection and management of SSSIs were introduced by the Countryside and Rights of Way Act 2000 (in England and Wales) and (in Scotland) by the Nature Conservation (Scotland) Act 2004 and the Wildlife and Natural Environment (Scotland) Act 2010.

10.2 Conserved wetland sites (Ramsar sites)

Records within 2000m

0

Ramsar sites are designated under the Convention on Wetlands of International Importance, agreed in Ramsar, Iran, in 1971. They cover all aspects of wetland conservation and wise use, recognizing wetlands as ecosystems that are extremely important for biodiversity conservation in general and for the well-being of human communities. These sites cover a broad definition of wetland; marsh, fen, peatland or water, whether natural or artificial, permanent or temporary, with water that is static or flowing, fresh, brackish or salt, and even some marine areas.

10.3 Special Areas of Conservation (SAC)

Records within 2000m

0

Areas which have been identified as best representing the range and variety within the European Union of habitats and (non-bird) species listed on Annexes I and II to the Directive. SACs are designated under the EC Habitats Directive.

10.4 Special Protection Areas (SPA)

Records within 2000m

0

Sites classified by the UK Government under the EC Birds Directive, SPAs are areas of the most important habitat for rare (listed on Annex I to the Directive) and migratory birds within the European Union.



10.5 National Nature Reserves (NNR)

Records within 2000m

0

Sites containing examples of some of the most important natural and semi-natural terrestrial and coastal ecosystems in Great Britain. They are managed to conserve their habitats, provide special opportunities for scientific study or to provide public recreation compatible with natural heritage interests.

10.6 Local Nature Reserves (LNR)

Records within 2000m

0

Sites managed for nature conservation, and to provide opportunities for research and education, or simply enjoying and having contact with nature. They are declared by local authorities under the National Parks and Access to the Countryside Act 1949 after consultation with the relevant statutory nature conservation agency.

10.7 Designated Ancient Woodland

Records within 2000m

0

Ancient woodlands are classified as areas which have been wooded continuously since at least 1600 AD. This includes semi-natural woodland and plantations on ancient woodland sites. 'Wooded continuously' does not mean there is or has previously been continuous tree cover across the whole site, and not all trees within the woodland have to be old.

10.8 Biosphere Reserves

Records within 2000m

0

Biosphere Reserves are internationally recognised by UNESCO as sites of excellence to balance conservation and socioeconomic development between nature and people. They are recognised under the Man and the Biosphere (MAB) Programme with the aim of promoting sustainable development founded on the work of the local community.



10.9 Forest Parks

Records within 2000m

0

These are areas managed by the Forestry Commission designated on the basis of recreational, conservation or scenic interest.

10.10 Marine Conservation Zones

Records within 2000m

0

A type of marine nature reserve in UK waters established under the Marine and Coastal Access Act (2009). They are designated with the aim to protect nationally important, rare or threatened habitats and species.

10.11 Green Belt

Records within 2000m

0

Areas designated to prevent urban sprawl by keeping land permanently open.

10.12 Proposed Ramsar sites

Records within 2000m

0

Ramsar sites are areas listed as a Wetland of International Importance under the Convention on Wetlands of International Importance especially as Waterfowl Habitat (the Ramsar Convention) 1971. The sites here supplied have a status of 'Proposed' having been identified for potential adoption under the framework.

10.13 Possible Special Areas of Conservation (pSAC)

Records within 2000m

0

Special Areas of Conservation are areas which have been identified as best representing the range and variety within the European Union of habitats and (non-bird) species listed on Annexes I and II to the Directive. SACs are designated under the EC Habitats Directive. Those sites supplied here are those with a status of 'Possible' having been identified for potential adoption under the framework.



10.14 Potential Special Protection Areas (pSPA)

Records within 2000m

0

Special Protection Areas (SPAs) are areas designated (or 'classified') under the European Union Wild Birds Directive for the protection of nationally and internationally important populations of wild birds. Those sites supplied here are those with a status of 'Potential' having been identified for potential adoption under the framework.

10.15 Nitrate Sensitive Areas

Records within 2000m

0

Areas where nitrate concentrations in drinking water sources exceeded or was at risk of exceeding the limit of 50 mg/l set by the 1980 EC Drinking Water Directive. Voluntary agricultural measures as a means of reducing the levels of nitrate were introduced by DEFRA as MAFF, with payments being made to farmers who complied. The scheme was started as a pilot in 1990 in ten areas, later implemented within 32 areas. The scheme was closed to further new entrants in 1998, although existing agreements continued for their full term. All Nitrate Sensitive Areas fell within the areas designated as Nitrate Vulnerable Zones (NVZs) in 1996 under the EC Nitrate Directive (91/676/EEC).

10.16 Nitrate Vulnerable Zones

Records within 2000m

0

Areas at risk from agricultural nitrate pollution designated under the EC Nitrate Directive (91/676/EEC). These are areas of land that drain into waters polluted by nitrates. Farmers operating within these areas have to follow mandatory rules to tackle nitrate loss from agriculture.



SSSI Impact Zones and Units

10.17 SSSI Impact Risk Zones

Records on site 0

Developed to allow rapid initial assessment of the potential risks to SSSIs posed by development proposals. They define zones around each SSSI which reflect the particular sensitivities of the features for which it is notified and indicate the types of development proposal which could potentially have adverse impacts.

10.18 SSSI Units

Records within 2000m 0

Divisions of SSSIs used to record management and condition details. Units are the smallest areas for which Natural England gives a condition assessment, however, the size of units varies greatly depending on the types of management and the conservation interest.



11 Visual and cultural designations

11.1 World Heritage Sites

Records within 250m 0

Sites designated for their globally important cultural or natural interest requiring appropriate management and protection measures. World Heritage Sites are designated to meet the UK's commitments under the World Heritage Convention.

11.2 Area of Outstanding Natural Beauty

Records within 250m 0

Areas of Outstanding Natural Beauty (AONB) are conservation areas, chosen because they represent 18% of the finest countryside. Each AONB has been designated for special attention because of the quality of their flora, fauna, historical and cultural associations, and/or scenic views. The National Parks and Access to the Countryside Act of 1949 created AONBs and the Countryside and Rights of Way Act, 2000 added further regulation and protection. There are likely to be restrictions to some developments within these areas.

11.3 National Parks

Records within 250m 0

In England and Wales, the purpose of National Parks is to conserve and enhance landscapes within the countryside whilst promoting public enjoyment of them and having regard for the social and economic well-being of those living within them. In Scotland National Parks have the additional purpose of promoting the sustainable use of the natural resources of the area and the sustainable social and economic development of its communities. The National Parks and Access to the Countryside Act 1949 established the National Park designation in England and Wales, and The National Parks (Scotland) Act 2000 in Scotland.

11.4 Listed Buildings

Records within 250m 0

Buildings listed for their special architectural or historical interest. Building control in the form of 'listed building consent' is required in order to make any changes to that building which might affect its special interest. Listed buildings are graded to indicate their relative importance, however building controls apply to all buildings equally, irrespective of their grade, and apply to the interior and exterior of the building in its entirety, together with any curtilage structures.



11.5 Conservation Areas

Records within 250m

0

Local planning authorities are obliged to designate as conservation areas any parts of their own area that are of special architectural or historic interest, the character and appearance of which it is desirable to preserve or enhance. Designation of a conservation area gives broader protection than the listing of individual buildings. All the features within the area, listed or otherwise, are recognised as part of its character. Conservation area designation is the means of recognising the importance of all factors and of ensuring that planning decisions address the quality of the landscape in its broadest sense.

11.6 Scheduled Ancient Monuments

Records within 250m

0

A scheduled monument is an historic building or site that is included in the Schedule of Monuments kept by the Secretary of State for Digital, Culture, Media and Sport. The regime is set out in the Ancient Monuments and Archaeological Areas Act 1979. The Schedule of Monuments has c.20,000 entries and includes sites such as Roman remains, burial mounds, castles, bridges, earthworks, the remains of deserted villages and industrial sites. Monuments are not graded, but all are, by definition, considered to be of national importance.

11.7 Registered Parks and Gardens


Records within 250m

0

Parks and gardens assessed to be of particular interest and of special historic interest. The emphasis being on 'designed' landscapes, rather than on planting or botanical importance. Registration is a 'material consideration' in the planning process, meaning that planning authorities must consider the impact of any proposed development on the special character of the landscape.



12 Agricultural designations

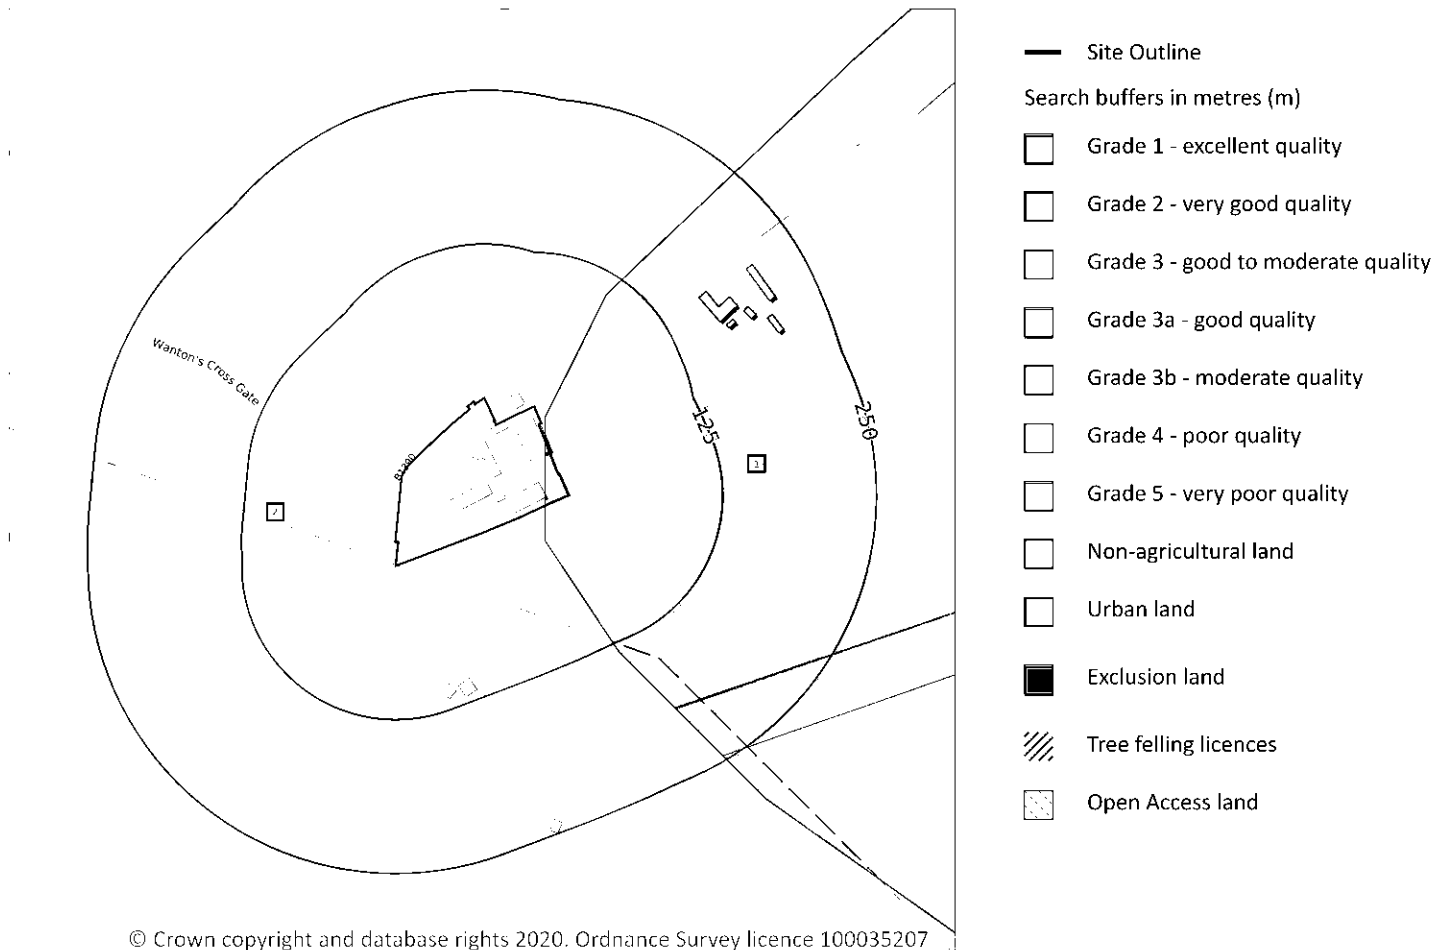

12.1 Agricultural Land Classification

Records within 250m

2

Classification of the quality of agricultural land taking into consideration multiple factors including climate, physical geography and soil properties. It should be noted that the categories for the grading of agricultural land are not consistent across England, Wales and Scotland.

Features are displayed on the Agricultural designations map on **page 50**

ID	Location	Classification	Description
1	On site	Grade 1	Excellent quality agricultural land. Land with no or very minor limitations to agricultural use. A very wide range of agricultural and horticultural crops can be grown and commonly includes top fruit, soft fruit, salad crops and winter harvested vegetables. Yields are high and less variable than on land of lower quality.



ID	Location	Classification	Description
2	On site	Grade 2	Very good quality agricultural land. Land with minor limitations which affect crop yield, cultivations or harvesting. A wide range of agricultural and horticultural crops can usually be grown but on some land in the grade there may be reduced flexibility due to difficulties with the production of the more demanding crops such as winter harvested vegetables and arable root crops. The level of yield is generally high but may be lower or more variable than Grade 1.

12.2 Open Access Land

Records within 250m **0**

The Countryside and Rights of Way Act 2000 (CROW Act) gives a public right of access to land without having to use paths. Access land includes mountains, moors, heaths and downs that are privately owned. It also includes common land registered with the local council and some land around the England Coast Path. Generally permitted activities on access land are walking, running, watching wildlife and climbing.

12.3 Tree Felling Licences

Records within 250m **0**

Felling Licence Application (FLA) areas approved by Forestry Commission England. Anyone wishing to fell trees must ensure that a licence or permission under a grant scheme has been issued by the Forestry Commission before any felling is carried out or that one of the exceptions apply.

12.4 Environmental Stewardship Schemes

Records within 250m **0**

Environmental Stewardship covers a range of schemes that provide financial incentives to farmers, foresters and land managers to look after and improve the environment.

12.5 Countryside Stewardship Schemes

Records within 250m **0**

Countryside Stewardship covers a range of schemes that provide financial incentives to farmers, foresters and land managers to look after and improve the environment. Main objectives are to improve the farmed environment for wildlife and to reduce diffuse water pollution.





13 Habitat designations

13.1 Priority Habitat Inventory

Records within 250m 0

Habitats of principal importance as named under Natural Environment and Rural Communities Act (2006) Section 41.

13.2 Habitat Networks

Records within 250m 0

Habitat networks for 18 priority habitat networks (based primarily, but not exclusively, on the priority habitat inventory) and areas suitable for the expansion of networks through restoration and habitat creation.

13.3 Open Mosaic Habitat

Records within 250m 0

Sites verified as Open Mosaic Habitat. Mosaic habitats are brownfield sites that are identified under the UK Biodiversity Action Plan as a priority habitat due to the habitat variation within a single site, supporting an array of invertebrates.


13.4 Limestone Pavement Orders

Records within 250m 0

Limestone pavements are outcrops of limestone where the surface has been worn away by natural means over millennia. These rocks have the appearance of paving blocks, hence their name. Not only do they have geological interest, they also provide valuable habitats for wildlife. These habitats are threatened due to their removal for use in gardens and water features. Many limestone pavements have been designated as SSSIs which affords them some protection. In addition, Section 34 of the Wildlife and Countryside Act 1981 gave them additional protection via the creation of Limestone Pavement Orders, which made it a criminal offence to remove any part of the outcrop. The associated Limestone Pavement Priority Habitat is part of the UK Biodiversity Action Plan priority habitat in England.



14 Geology 1:10,000 scale - Availability

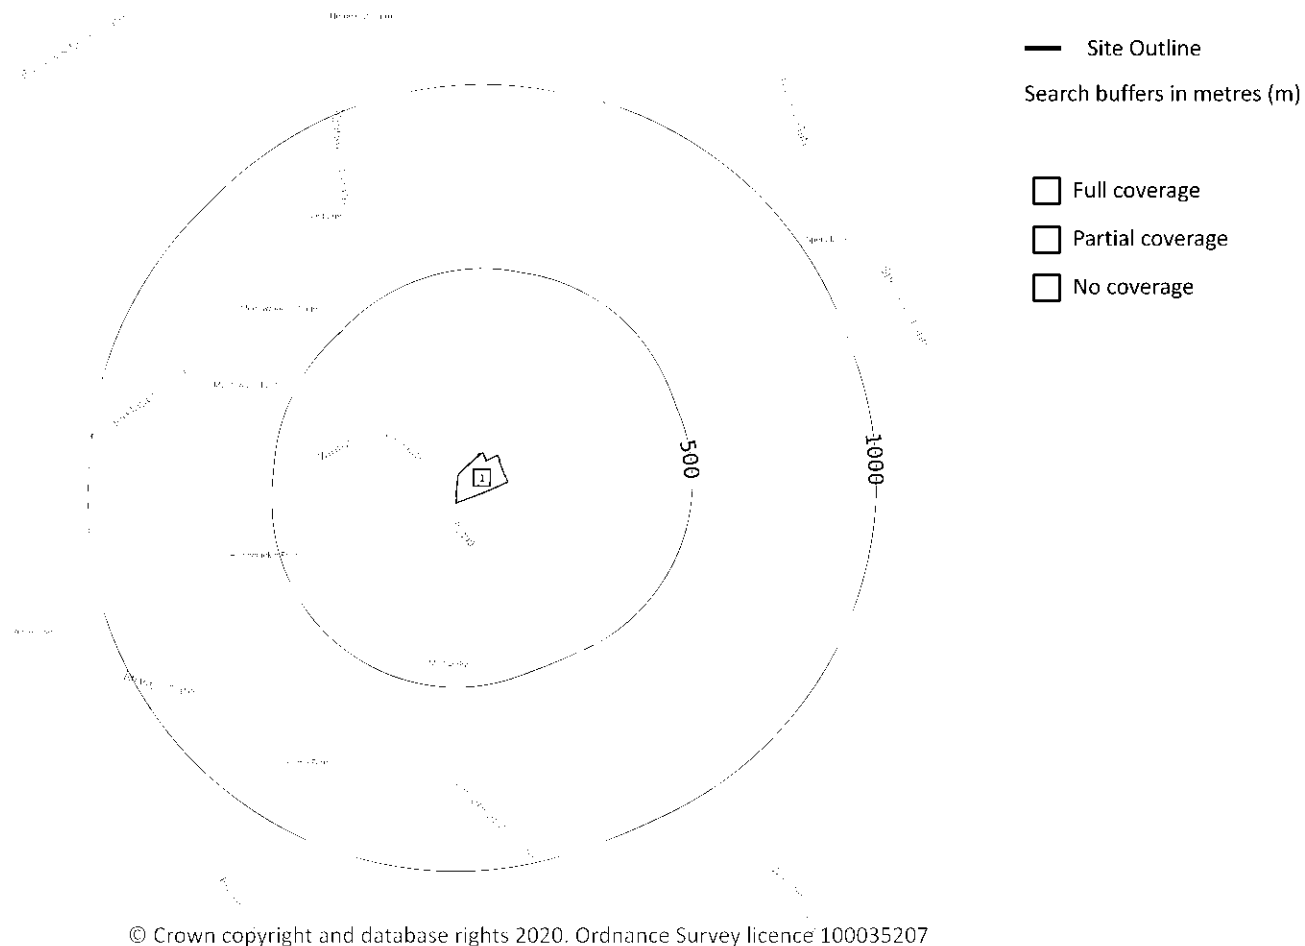

14.1 10k Availability

Records within 500m

1

An indication on the coverage of 1:10,000 scale geology data for the site, the most detailed dataset provided by the British Geological Survey. Either 'Full', 'Partial' or 'No coverage' for each geological theme.

Features are displayed on the Geology 1:10,000 scale - Availability map on **page 54**

ID	Location	Artificial	Superficial	Bedrock	Mass movement	Sheet No.
1	On site	No coverage	No coverage	No coverage	No coverage	NoCov



Geology 1:10,000 scale - Artificial and made ground

14.2 Artificial and made ground (10k)

Records within 500m

0

Details of made, worked, infilled, disturbed and landscaped ground at 1:10,000 scale. Artificial ground can be associated with potentially contaminated material, unpredictable engineering conditions and instability.



Geology 1:10,000 scale - Superficial

14.3 Superficial geology (10k)

Records within 500m

0

Superficial geological deposits at 1:10,000 scale. Also known as 'drift', these are the youngest geological deposits, formed during the Quaternary. They rest on older deposits or rocks referred to as bedrock.

14.4 Landslip (10k)

Records within 500m

0

Mass movement deposits on BGS geological maps at 1:10,000 scale. Primarily superficial deposits that have moved down slope under gravity to form landslips. These affect bedrock, other superficial deposits and artificial ground.



Geology 1:10,000 scale - Bedrock

14.5 Bedrock geology (10k)

Records within 500m

0

Bedrock geology at 1:10,000 scale. The main mass of rocks forming the Earth and present everywhere, whether exposed at the surface in outcrops or concealed beneath superficial deposits or water.

14.6 Bedrock faults and other linear features (10k)

Records within 500m

0

Linear features at the ground or bedrock surface at 1:10,000 scale of six main types; rock, fault, fold axis, mineral vein, alteration area or landform. Features are either observed or inferred, and relate primarily to bedrock.



Geology 1:50,000 scale - Artificial and made ground

15.2 Artificial and made ground (50k)

Records within 500m

0

Details of made, worked, infilled, disturbed and landscaped ground at 1:50,000 scale. Artificial ground can be associated with potentially contaminated material, unpredictable engineering conditions and instability.

15.3 Artificial ground permeability (50k)


Records within 50m

0

A qualitative classification of estimated rates of vertical movement of water from the ground surface through the unsaturated zone of any artificial deposits (the zone between the land surface and the water table).



Geology 1:50,000 scale - Superficial

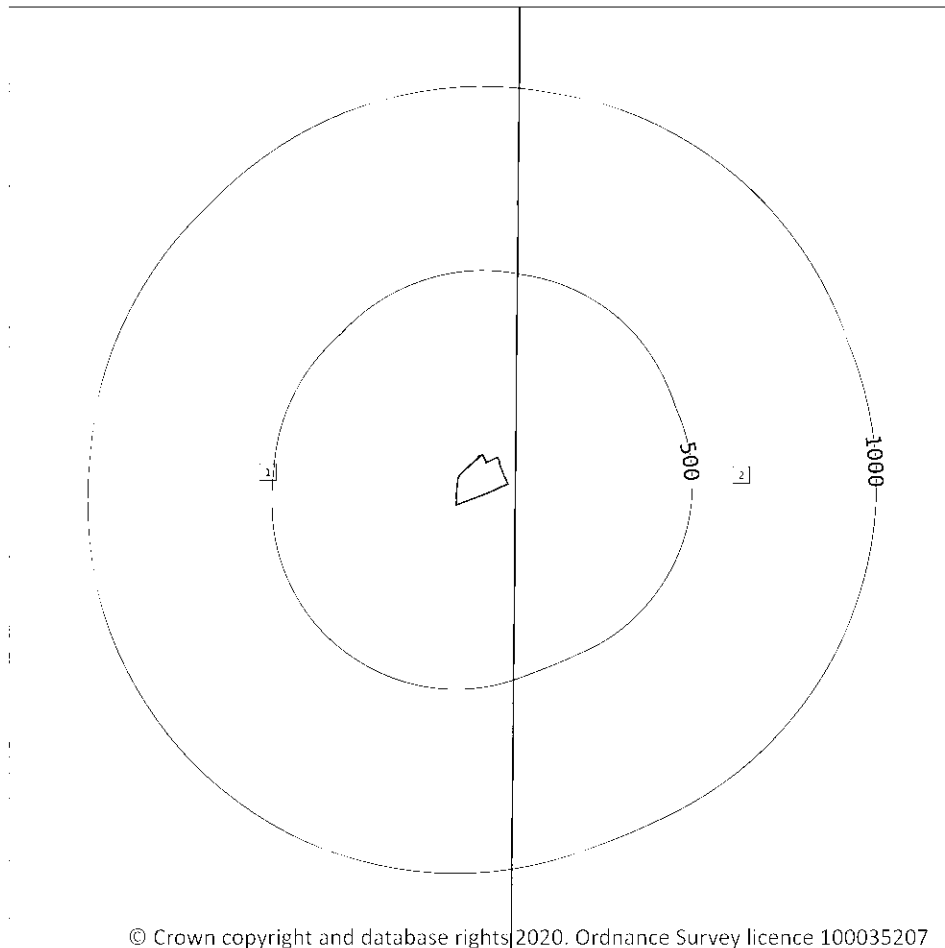

— Site Outline
Search buffers in metres (m)
 Landslip (50k)
Superficial geology (50k)
Please see table for more details.

15.4 Superficial geology (50k)

Records within 500m

2

Superficial geological deposits at 1:50,000 scale. Also known as 'drift', these are the youngest geological deposits, formed during the Quaternary. They rest on older deposits or rocks referred to as bedrock.

Features are displayed on the Geology 1:50,000 scale - Superficial map on **page 60**

ID	Location	LEX Code	Description	Rock description
1	On site	TFD-XCZ	TIDAL FLAT DEPOSITS	CLAY AND SILT



15.5 Superficial permeability (50k)

Records within 50m

1

A qualitative classification of estimated rates of vertical movement of water from the ground surface through the unsaturated zone of any superficial deposits (the zone between the land surface and the water table).

Location	Flow type	Maximum permeability	Minimum permeability
On site	Intergranular	Low	Very Low

15.6 Landslip (50k)

Records within 500m

0

Mass movement deposits on BGS geological maps at 1:50,000 scale. Primarily superficial deposits that have moved down slope under gravity to form landslips. These affect bedrock, other superficial deposits and artificial ground.

15.7 Landslip permeability (50k)


Records within 50m

0

A qualitative classification of estimated rates of vertical movement of water from the ground surface through the unsaturated zone of any landslip deposits (the zone between the land surface and the water table).



Geology 1:50,000 scale - Bedrock

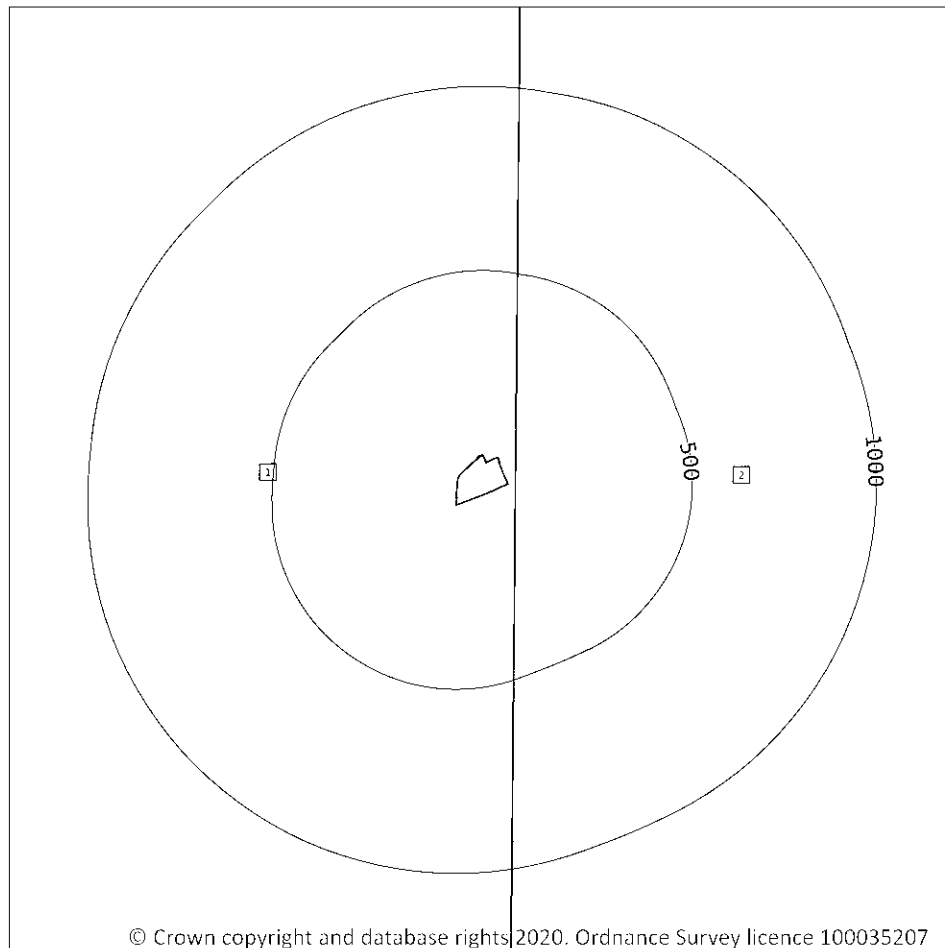

— Site Outline
Search buffers in metres (m)
.... Bedrock faults and other linear features (50k)
Bedrock geology (50k)
Please see table for more details.

15.8 Bedrock geology (50k)

Records within 500m

2

Bedrock geology at 1:50,000 scale. The main mass of rocks forming the Earth and present everywhere, whether exposed at the surface in outcrops or concealed beneath superficial deposits or water.

Features are displayed on the Geology 1:50,000 scale - Bedrock map on **page 62**

ID	Location	LEX Code	Description	Rock age
1	On site	AMC-MDST	AMPTHILL CLAY FORMATION - MUDSTONE	OXFORDIAN



15.9 Bedrock permeability (50k)

Records within 50m

1

A qualitative classification of estimated rates of vertical movement of water from the ground surface through the unsaturated zone of bedrock (the zone between the land surface and the water table).

Location	Flow type	Maximum permeability	Minimum permeability
On site	Fracture	Low	Very Low

15.10 Bedrock faults and other linear features (50k)


Records within 500m

0

Linear features at the ground or bedrock surface at 1:50,000 scale of six main types; rock, fault, fold axis, mineral vein, alteration area or landform. Features are either observed or inferred, and relate primarily to bedrock.



16 Boreholes

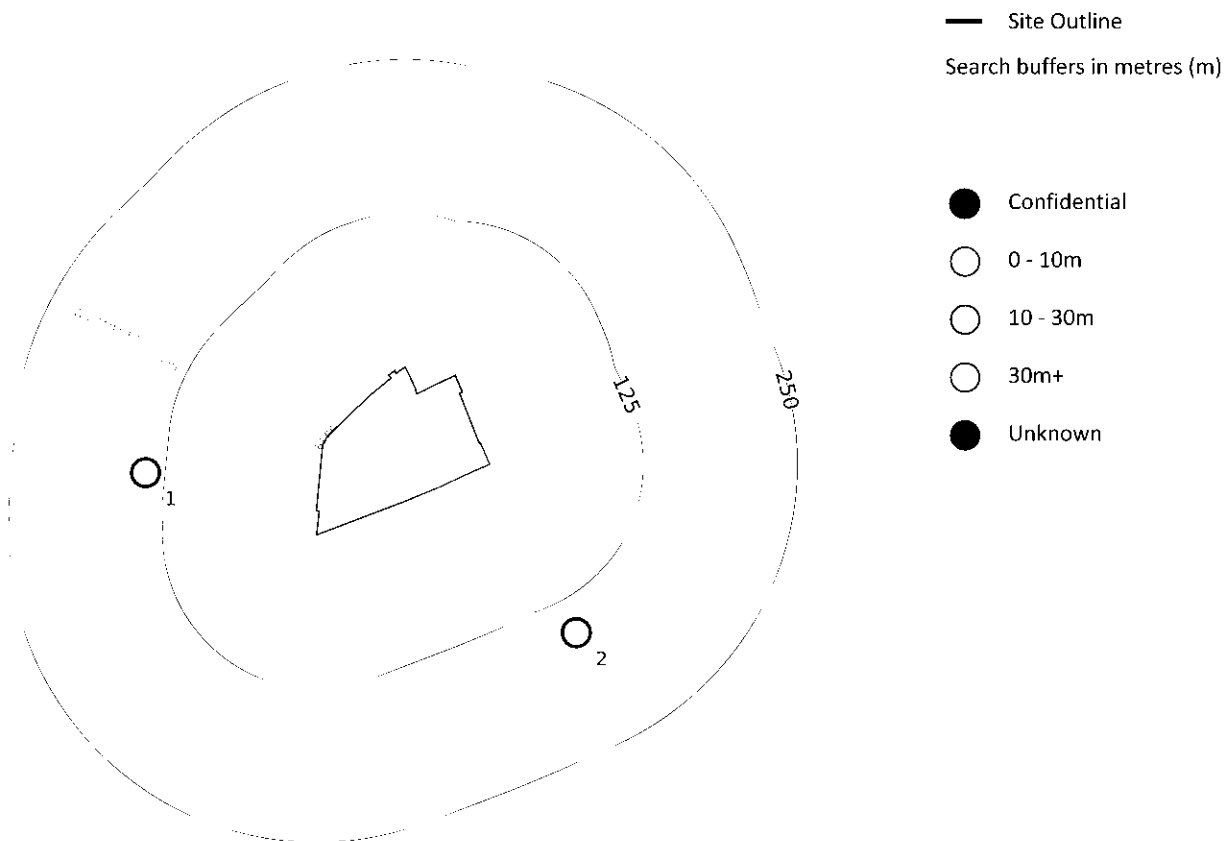

© Crown copyright and database rights 2020. Ordnance Survey licence 100035207

16.1 BGS Boreholes

Records within 250m

2


The Single Onshore Boreholes Index (SOBI); an index of over one million records of boreholes, shafts and wells from all forms of drilling and site investigation work held by the British Geological Survey. Covering onshore and nearshore boreholes dating back to at least 1790 and ranging from one to several thousand metres deep.

Features are displayed on the Boreholes map on **page 64**

ID	Location	Grid reference	Name	Length	Confidential	Web link
						506004
						506003



17 Natural ground subsidence - Shrink swell clays

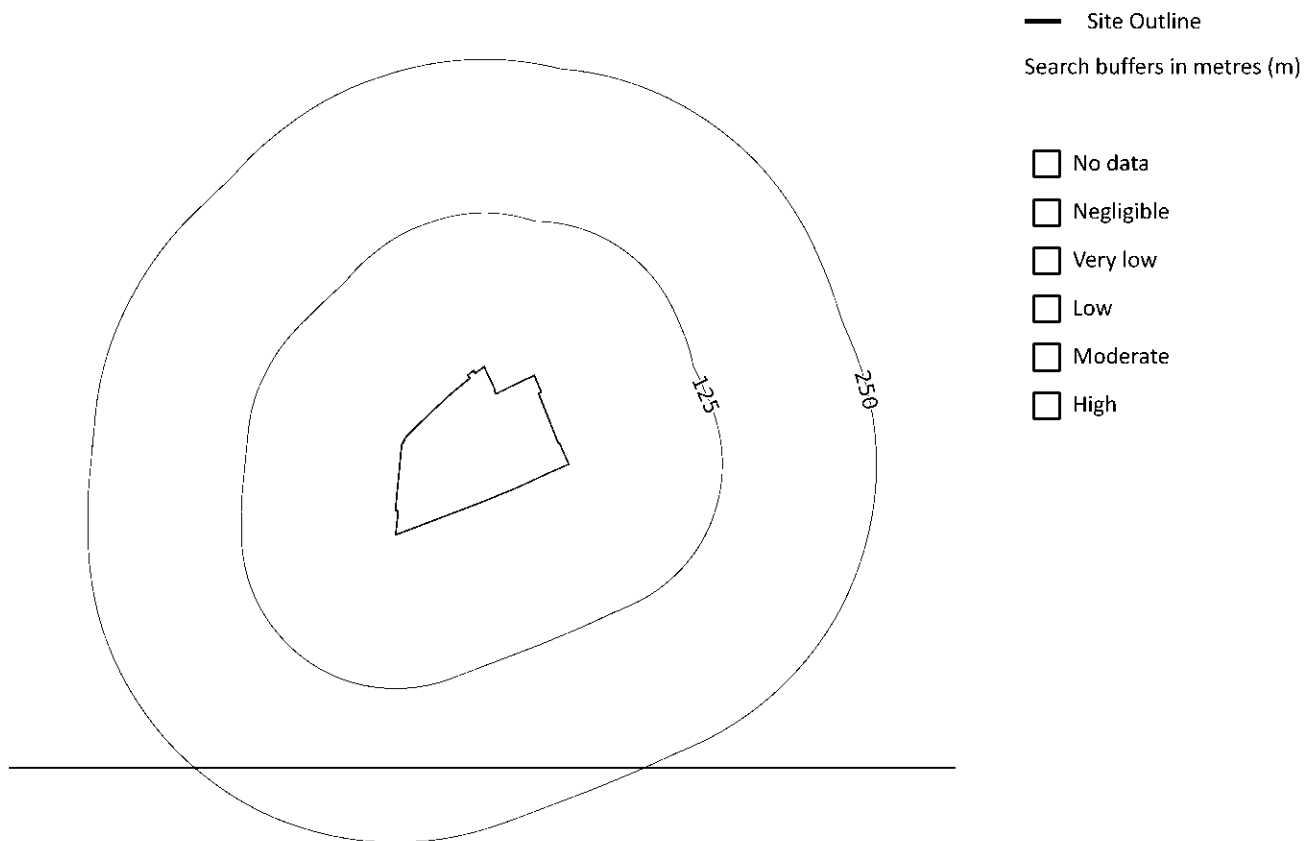

© Crown copyright and database rights 2020. Ordnance Survey licence 100035207

17.1 Shrink swell clays

Records within 50m

1


The potential hazard presented by soils that absorb water when wet (making them swell), and lose water as they dry (making them shrink). This shrink-swell behaviour is controlled by the type and amount of clay in the soil, and by seasonal changes in the soil moisture content (related to rainfall and local drainage).

Features are displayed on the Natural ground subsidence - Shrink swell clays map on **page 65**

Location	Hazard rating	Details
On site	Low	Ground conditions predominantly medium plasticity.



Natural ground subsidence - Running sands

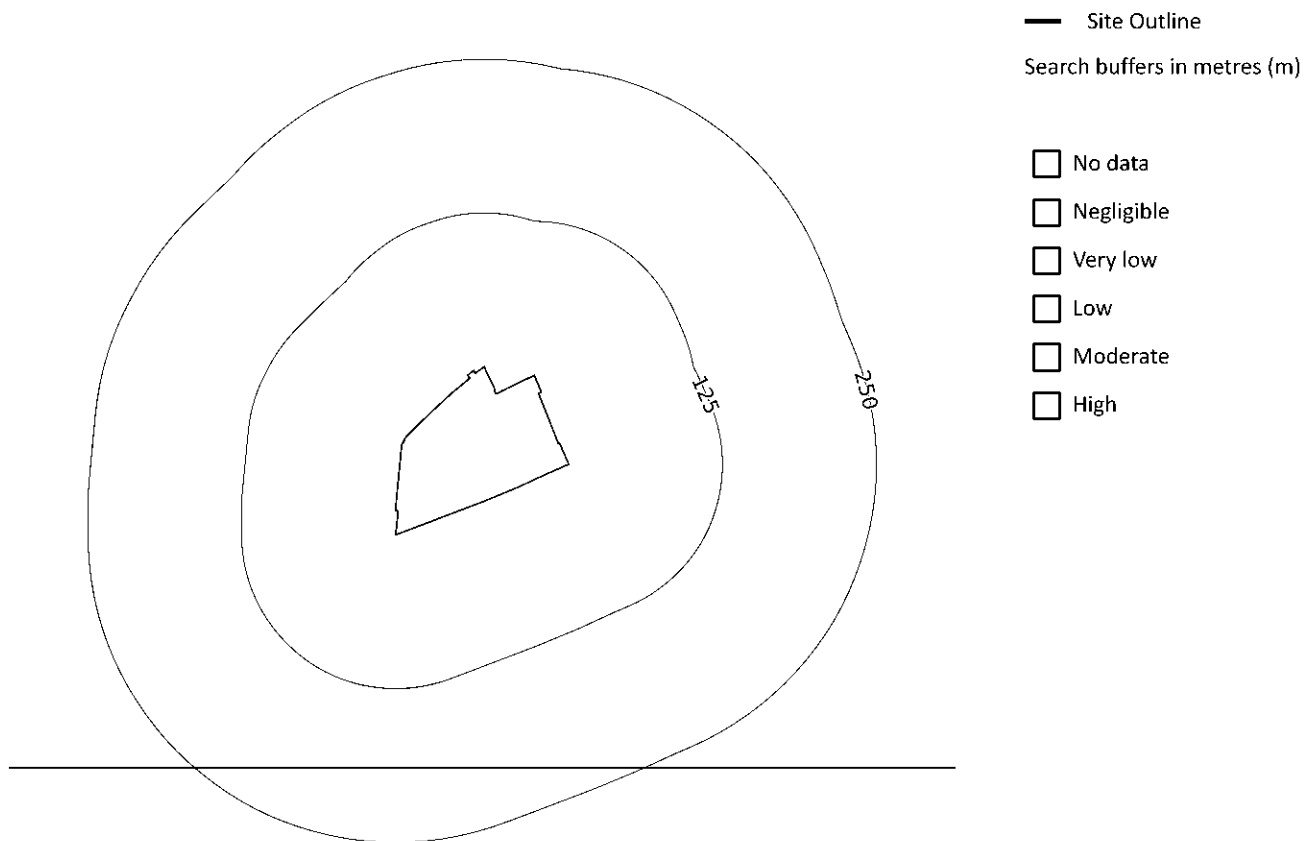

© Crown copyright and database rights 2020. Ordnance Survey licence 100035207

17.2 Running sands

Records within 50m

1


The potential hazard presented by rocks that can contain loosely-packed sandy layers that can become fluidised by water flowing through them. Such sands can 'run', removing support from overlying buildings and causing potential damage.

Features are displayed on the Natural ground subsidence - Running sands map on **page 66**

Location	Hazard rating	Details
On site	Moderate	Running sand conditions are probably present. Constraints may apply to land uses involving excavation or the addition or removal of water.



Natural ground subsidence - Compressible deposits

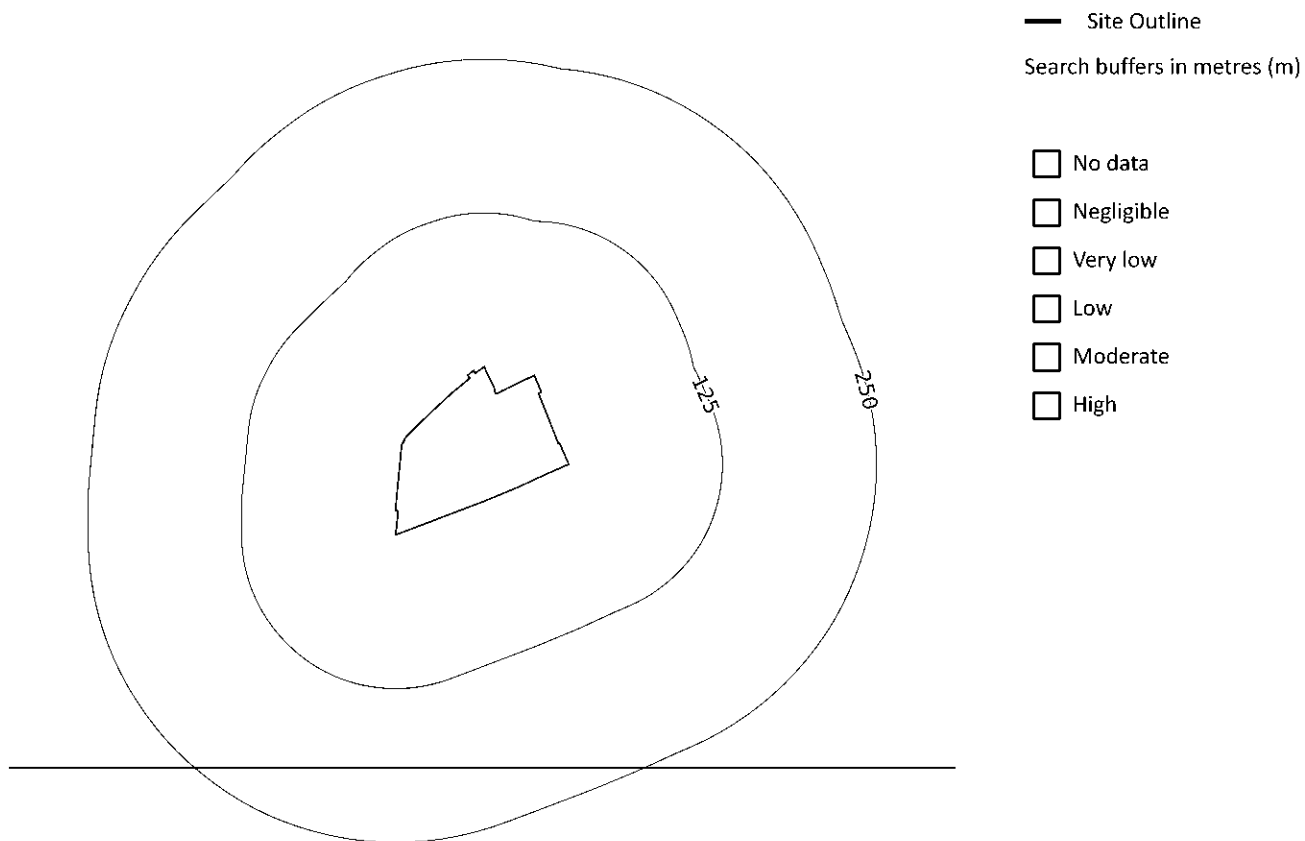

© Crown copyright and database rights 2020. Ordnance Survey licence 100035207

17.3 Compressible deposits

Records within 50m

1


The potential hazard presented by types of ground that may contain layers of very soft materials like clay or peat and may compress if loaded by overlying structures, or if the groundwater level changes, potentially resulting in depression of the ground and disturbance of foundations.

Features are displayed on the Natural ground subsidence - Compressible deposits map on **page 67**

Location	Hazard rating	Details
On site	Moderate	Compressibility and uneven settlement hazards are probably present. Land use should consider specifically the compressibility and variability of the site.



Natural ground subsidence - Collapsible deposits

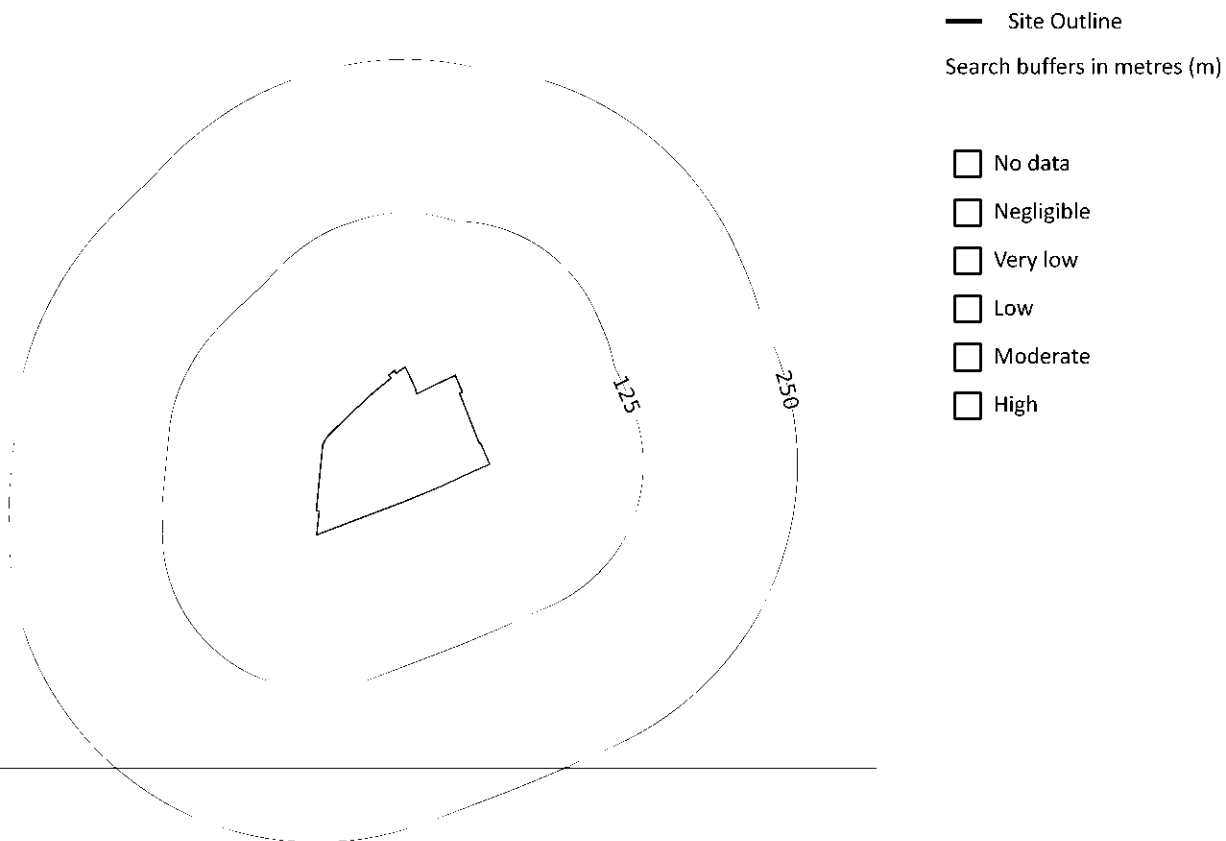

© Crown copyright and database rights 2020. Ordnance Survey licence 100035207

17.4 Collapsible deposits

Records within 50m

1


The potential hazard presented by natural deposits that could collapse when a load (such as a building) is placed on them or they become saturated with water.

Features are displayed on the Natural ground subsidence - Collapsible deposits map on **page 68**

Location	Hazard rating	Details
On site	Negligible	Deposits with potential to collapse when loaded and saturated are believed not to be present.



Natural ground subsidence - Landslides

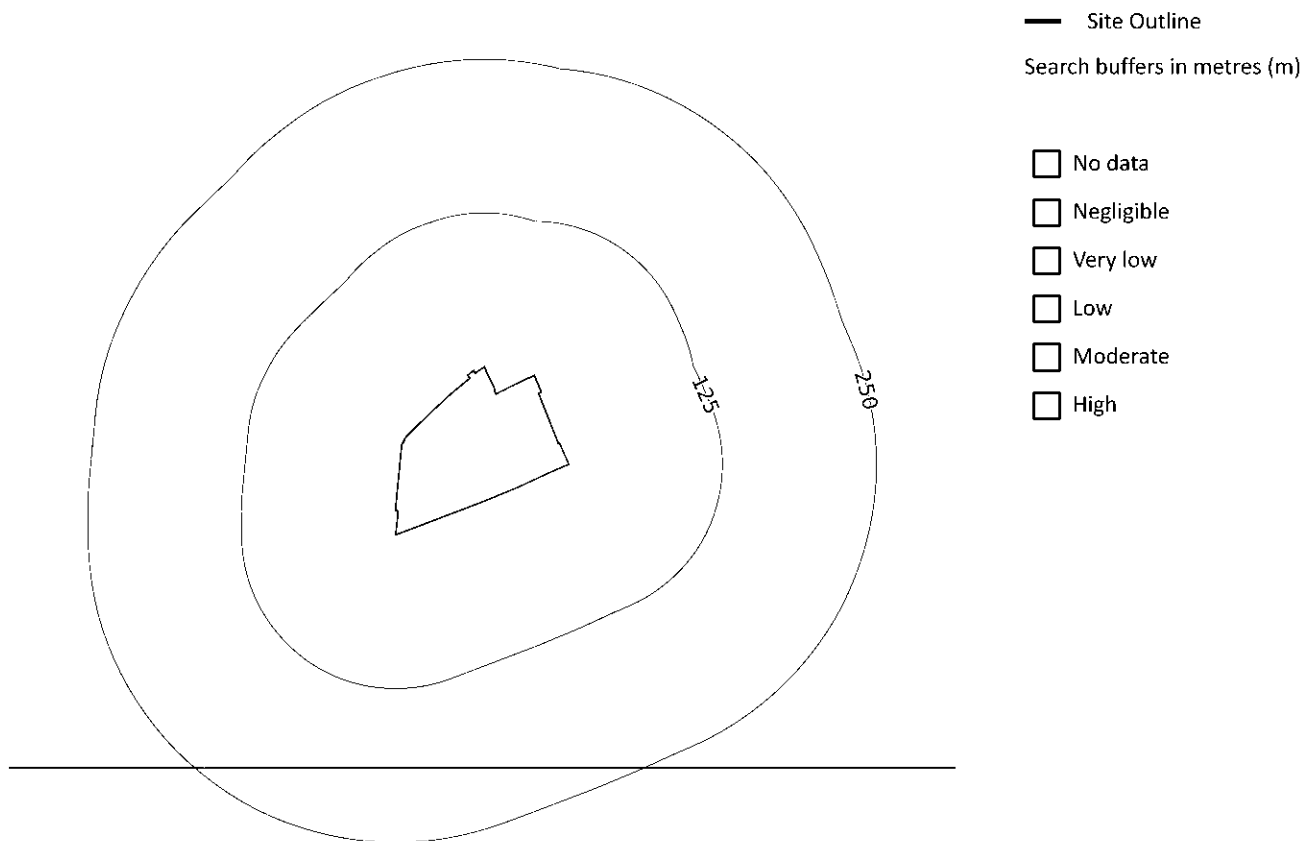

© Crown copyright and database rights 2020. Ordnance Survey licence 100035207

17.5 Landslides

Records within 50m

1


The potential for landsliding (slope instability) to be a hazard assessed using 1:50,000 scale digital maps of superficial and bedrock deposits, combined with information from the BGS National Landslide Database and scientific and engineering reports.

Features are displayed on the Natural ground subsidence - Landslides map on **page 69**

Location	Hazard rating	Details
On site	Very low	Slope instability problems are not likely to occur but consideration to potential problems of adjacent areas impacting on the site should always be considered.



Natural ground subsidence - Ground dissolution of soluble rocks

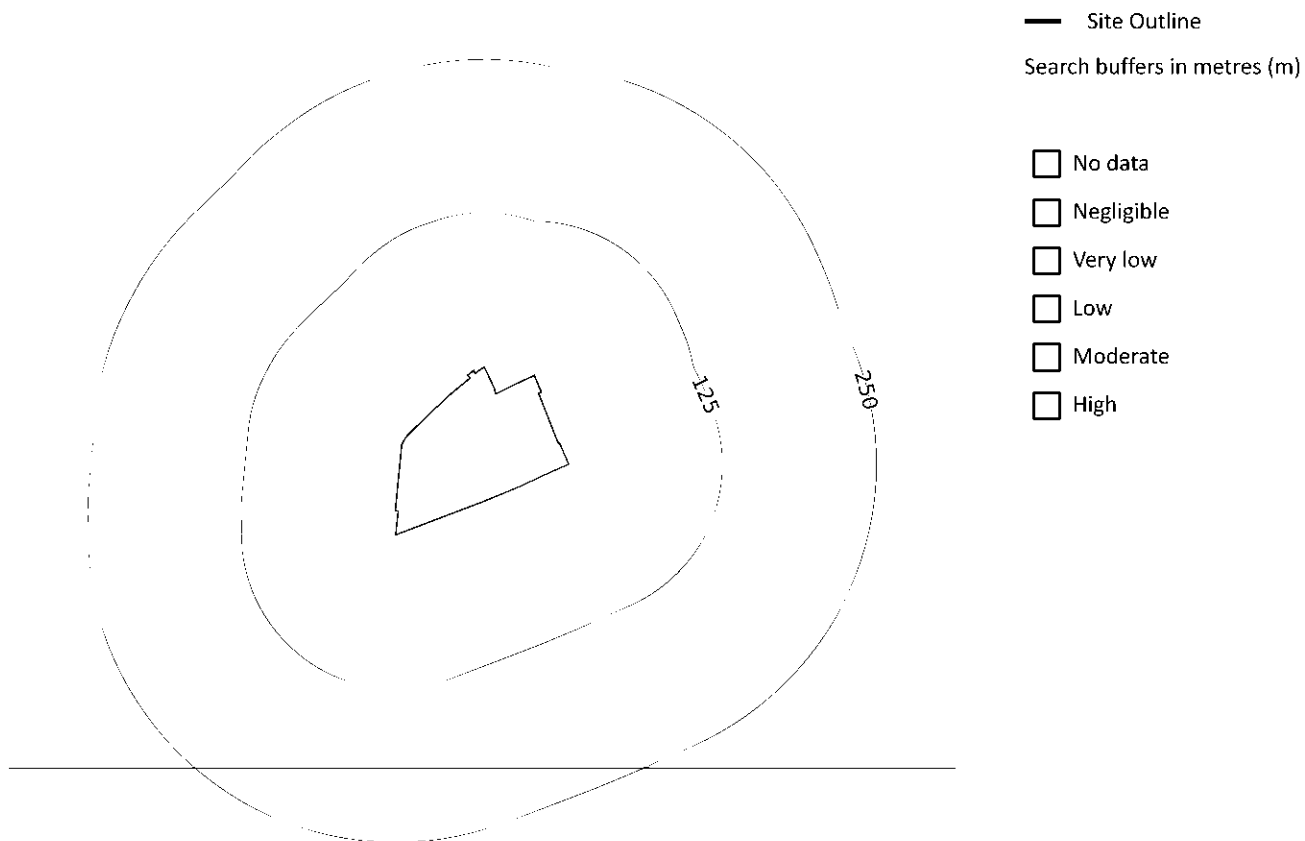

© Crown copyright and database rights 2020. Ordnance Survey licence 100035207

17.6 Ground dissolution of soluble rocks

Records within 50m

1


The potential hazard presented by ground dissolution, which occurs when water passing through soluble rocks produces underground cavities and cave systems. These cavities reduce support to the ground above and can cause localised collapse of the overlying rocks and deposits.

Features are displayed on the Natural ground subsidence - Ground dissolution of soluble rocks map on **page 70**

Location	Hazard rating	Details
On site	Negligible	Soluble rocks are either not thought to be present within the ground, or not prone to dissolution. Dissolution features are unlikely to be present.



18 Mining, ground workings and natural cavities

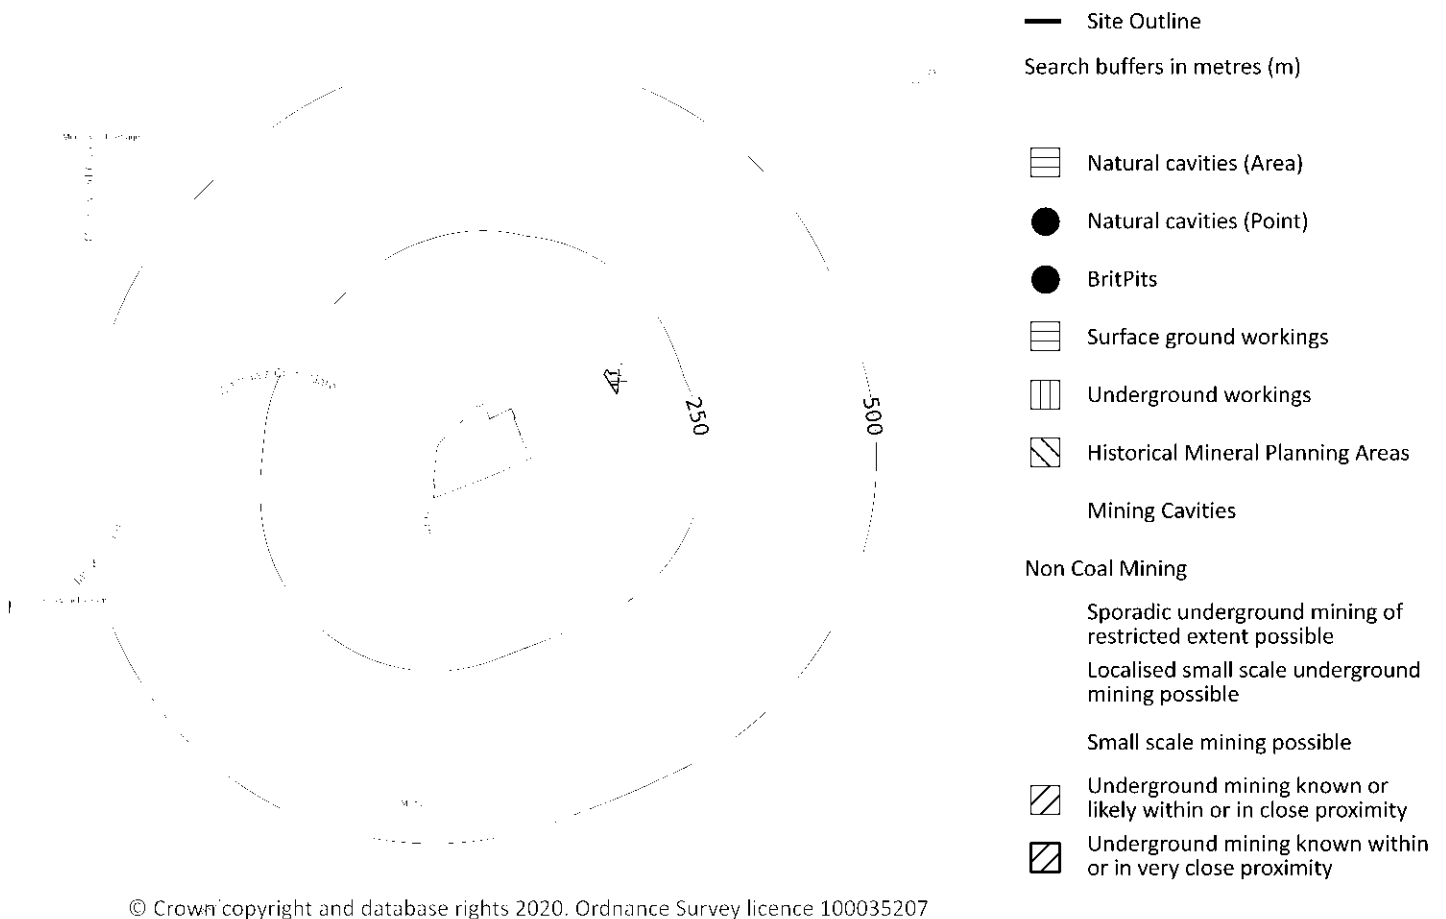

18.1 Natural cavities

Records within 500m

0

Industry recognised national database of natural cavities. Sinkholes and caves are formed by the dissolution of soluble rock, such as chalk and limestone, gulls and fissures by cambering. Ground instability can result from movement of loose material contained within these cavities, often triggered by water.

18.2 BritPits

Records within 500m

0

BritPits (an abbreviation of British Pits) is a database maintained by the British Geological Survey of currently active and closed surface and underground mineral workings. Details of major mineral handling sites, such as wharfs and rail depots are also held in the database.

18.3 Surface ground workings

Records within 250m

1

Historical land uses identified from Ordnance Survey mapping that involved ground excavation at the surface. These features may or may not have been subsequently backfilled.

Features are displayed on the Mining, ground workings and natural cavities map on **page 71**

ID	Location	Land Use	Year of mapping	Mapping scale
----	----------	----------	-----------------	---------------

18.4 Underground workings

Records within 1000m

0

Historical land uses identified from Ordnance Survey mapping that indicate the presence of underground workings e.g. mine shafts.

18.5 Historical Mineral Planning Areas

Records within 500m

0

Boundaries of mineral planning permissions for England and Wales. This data was collated between the 1940s (and retrospectively to the 1930s) and the mid 1980s. The data includes permitted, withdrawn and refused permissions.



18.6 Non-coal mining

Records within 1000m

0

The potential for historical non-coal mining to have affected an area. The assessment is drawn from expert knowledge and literature in addition to the digital geological map of Britain. Mineral commodities may be divided into seven general categories - vein minerals, chalk, oil shale, building stone, bedded ores, evaporites and 'other' commodities (including ball clay, jet, black marble, graphite and chert).

18.7 Mining cavities

Records within 1000m

0

Industry recognised national database of mining cavities. Degraded mines may result in hazardous subsidence (crown holes). Climatic conditions and water escape can also trigger subsidence over mine entrances and workings.

18.8 JPB mining areas

Records on site

0

Areas which could be affected by former coal mining. This data includes some mine plans unavailable to the Coal Authority.

18.9 Coal mining

Records on site

0

Areas which could be affected by past, current or future coal mining.

18.10 Brine areas

Records on site

0

The Cheshire Brine Compensation District indicates areas that may be affected by salt and brine extraction in Cheshire and where compensation would be available where damage from this mining has occurred. Damage from salt and brine mining can still occur outside this district, but no compensation will be available.



18.11 Gypsum areas

Records on site

0

Generalised areas that may be affected by gypsum extraction.

18.12 Tin mining

Records on site

0

Generalised areas that may be affected by historical tin mining.

18.13 Clay mining


Records on site

0

Generalised areas that may be affected by kaolin and ball clay extraction.



19 Radon

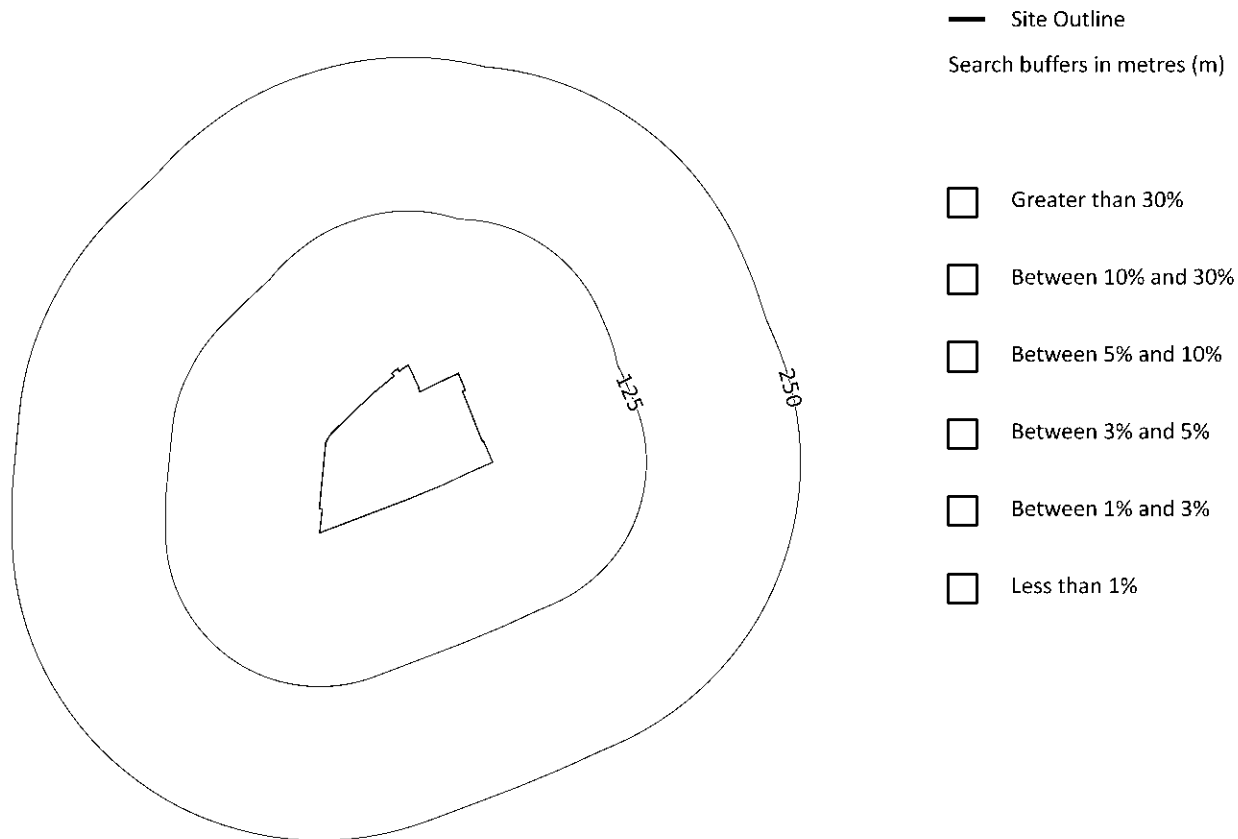

© Crown copyright and database rights 2020. Ordnance Survey licence 100035207

19.1 Radon

Records on site

1

Estimated percentage of dwellings exceeding the Radon Action Level. This data is the highest resolution radon dataset available for the UK and is produced to a 75m level of accuracy to allow for geological data accuracy and a 'residential property' buffer. The findings of this section should supersede any estimations derived from the Indicative Atlas of Radon in Great Britain. The data was derived from both geological assessments and long term measurements of radon in more than 479,000 households.

Features are displayed on the Radon map on **page 75**

Location	Estimated properties affected	Radon Protection Measures required
On site	Less than 1%	None**



20 Soil chemistry

20.1 BGS Estimated Background Soil Chemistry

Records within 50m

2

The estimated values provide the likely background concentration of the potentially harmful elements Arsenic, Cadmium, Chromium, Lead and Nickel in topsoil. The values are estimated primarily from rural topsoil data collected at a sample density of approximately 1 per 2 km². In areas where rural soil samples are not available, estimation is based on stream sediment data collected from small streams at a sampling density of 1 per 2.5 km²; this is the case for most of Scotland, Wales and southern England. The stream sediment data are converted to soil-equivalent concentrations prior to the estimation.

Location	Arsenic	Bioaccessible Arsenic	Lead	Bioaccessible Lead	Cadmium	Chromium	Nickel
On site	15 - 25 mg/kg	No data	100 mg/kg	60 mg/kg	1.8 mg/kg	90 - 120 mg/kg	15 - 30 mg/kg

20.2 BGS Estimated Urban Soil Chemistry

Records within 50m

0

Estimated topsoil chemistry of Arsenic, Cadmium, Chromium, Copper, Nickel, Lead, Tin and Zinc and bioaccessible Arsenic and Lead in 23 urban centres across Great Britain. These estimates are derived from interpolation of the measured urban topsoil data referred to above and provide information across each city between the measured sample locations (4 per km²).

20.3 BGS Measured Urban Soil Chemistry

Records within 50m

0

The locations and measured total concentrations (mg/kg) of Arsenic, Cadmium, Chromium, Copper, Nickel, Lead, Tin and Zinc in urban topsoil samples from 23 urban centres across Great Britain. These are collected at a sample density of 4 per km².



21 Railway infrastructure and projects

21.1 Underground railways (London)

Records within 250m 0

Details of all active London Underground lines, including approximate tunnel roof depth and operational hours.

21.2 Underground railways (Non-London)

Records within 250m 0

Details of the Merseyrail system, the Tyne and Wear Metro and the Glasgow Subway. Not all parts of all systems are located underground. The data contains location information only and does not include a depth assessment.

21.3 Railway tunnels

Records within 250m 0

Railway tunnels taken from contemporary Ordnance Survey mapping.

21.4 Historical railway and tunnel features

Records within 250m 0

Railways and tunnels digitised from historical Ordnance Survey mapping as scales of 1:1,250, 1:2,500, 1:10,000 and 1:10,560.

21.5 Royal Mail tunnels

Records within 250m 0

The Post Office Railway, otherwise known as the Mail Rail, is an underground railway running through Central London from Paddington Head District Sorting Office to Whitechapel Eastern Head Sorting Office. The line is 10.5km long. The data includes details of the full extent of the tunnels, the depth of the tunnel, and the depth to track level.



21.6 Historical railways

Records within 250m 0

Former railway lines, including dismantled lines, abandoned lines, disused lines, historic railways and razed lines.

21.7 Railways

Records within 250m 0

Currently existing railway lines, including standard railways, narrow gauge, funicular, trams and light railways.

21.8 Crossrail 1

Records within 500m 0

The Crossrail railway project links 41 stations over 100 kilometres from Reading and Heathrow in the west, through underground sections in central London, to Shenfield and Abbey Wood in the east.

21.9 Crossrail 2

Records within 500m 0

Crossrail 2 is a proposed railway linking the national rail networks in Surrey and Hertfordshire via an underground tunnel through London.

21.10 HS2

Records within 500m 0

HS2 is a proposed high speed rail network running from London to Manchester and Leeds via Birmingham. Main civils construction on Phase 1 (London to Birmingham) of the project began in 2019, and it is currently anticipated that this phase will be fully operational by 2026. Construction on Phase 2a (Birmingham to Crewe) is anticipated to commence in 2021, with the service fully operational by 2027. Construction on Phase 2b (Crewe to Manchester and Birmingham to Leeds) is scheduled to begin in 2023 and be operational by 2033.



Data providers

Groundsure works with respected data providers to bring you the most relevant and accurate information. To find out who they are and their areas of expertise see <https://www.groundsure.com/sources-reference>.

Terms and conditions

Groundsure's Terms and Conditions can be accessed at this link: <https://www.groundsure.com/terms-and-conditions-jan-2020/>.

