Build on First Floor extension in the manner shown, directly above existing Kitchen. Distance from boundaries as existing Kitchen.

Existing Kitchen roof to be removed to make way for proposed extension.

Existing foundations to be checked for adequacy. If found inadequate provide suitable underpinning all to South Holland District Council Building Inspector approval.

External walls to be rendered to match existing Kitchen walls.

First Floor level, fascia line, roof pitch etc all to match existing.

Existing Bedroom window to be removed and cut existing opening down to floor level.

First floor joists to be 200 x 50 SC3 grade at 400 centres.

Make good to all disturbed and affected areas.

Connect rainwater guttering to existing RWP's.

Roof/Wall Abutments
Provide Code 4 lead flashings and lap over roof covering. Dress up wall a minimum of 150mm (stepped on pitched abutments) and provide d.p.c. cavity tray to make completely watertight.

New/Old Walling
Where new walling meets old provide proprietary flexible wall starters.

Roof Ventilation
At eaves provide proprietary ventilation equivalent to a 10mm continuous gap along eaves.

Valleys
Use proprietary fibreglass valleys or provide Code 4 lead to valleys to make completely watertight.

Glazing
All windows and doors to be double-glazed with Pilkington 'K' glass or similar approved, to achieve either WER Band C or a 'U' value of 1.6W/m²K.

Electrical Work
All electrical work required to meet the requirements of Part P (electrical safety) must be designed, installed, inspected and tested by a person competent to do so. Prior to completion of the works the council must be satisfied that either:-
a) an electrical installation certificate issued under a competent person's scheme has been issued
or
b) an appropriate electrical installation certificate has been issued for the work, and that it has been signed by a person competent to do so.

External Cavity Wall Lintels for 300mm Cavity Walls
IG type L1/S100 unless stated otherwise. To be confirmed on site with Building Control Surveyor.

Purge ventilation to windows
For a hinged or pivot window that opens 30° or more the height and width should be at least 1/20th of the floor area of the room.
For a hinged or pivot window that opens less than 30° the height and width should be at least 1/10th of the floor area.

Background Ventilation
Background ventilation is to be provided by trickle ventilators to the tops of windows. Use trickle vents offering 8000mm² per window head. Ventilation for whole extension to be 25,000mm²

External Wall Construction (300mm cavity)
100mm facing brickwork (see site plan for details)
100mm Cavity with ISOVER, HI-CAV 32 insulation
100mm inner skin of tarmac Hemalite blocks
Cavity wall ties to be stainless steel type spaced 900mm horizontally and 450mm vertically to BS1243;1978. Internal block walls to receive 10mm sand/cement render and skim. Robust details in accordance is TS0,2001

Safety Glazing
Provide safety glass to BS6206 to all windows to a minimum height of 800mm above floor level plus doors to a minimum height of 1500mm above floor level. Side screens to be same as doors if within 300mm of doors.

Rainwater Goods
PVC rainwater goods 110mm half-round gutters and 68mm diameter downpipes.

Roof Insulation
To roof spaces provide proprietary 300mm thick fibreglass insulation laid as 100mm between joists and 200mm across joists or equivalent to give 0.16 U/value. Ensure a gap of 50mm between roof underfelt and quilt at all times.

First Floor Construction
19mm flooring grade moisture resistant decking on timber joists as stated on plan. To external walls joists to be supported on joist hangers (not built into wall). Provide 30mm x 5mm mild steel restraint straps to joists running parallel with wall securely fixed to walls and to span minimum 3 no. joists at maximum 1200mm c/c. At strap positions provide pack and noggin to joists. Solid strutting to be installed mid-span where span of joists between 2.5m and 4.5m. For spans in excess of 4.5m position of struts at 1/3 rd span. Double up floor joists locally under bath feet and hot water cylinder where applicable. All doubled up joists to be bolted together at 600mm centres.

Roof Construction
Roof tiles (see site plan for details) on 38 x 25mm softwood treated timber battens on underfelt to BS747 (Type 1F) lapped 150mm horizontally and 100mm vertically. Prefabricated roof trusses at 600mm c/c and pitch as stated in accordance with BS5268, 1985. Provide 25 x 100mm timber bracing and fix in accordance with truss manufacturers instructions. All trusses and gable ladders (if any) to be strapped to 50 x 100mm timber wallplate, the gable wall at verges and ceiling level with 30 x 5mm mild steel anchor and lateral restraint straps to span minimum 3 no. trusses at a maximum of 1200mm c/c. At strap positions provide pack and noggins to trusses. Main contractor to supply local authority building control with roof truss calculations 28 days prior to erection on site. Provide concrete padstones at compound truss supports where required by roof design. Water storage tanks to be installed in accordance with Technical Bulletin No. 41.T.P.A. with timber support members to span 4 no. trusses.

Fascia and Bargeboards
To be 25 x 75mm PSE with 6 mm groove to accept 6mm thick exterior grade plywood soffit.

Ceilings
To all insulated roof ceilings provide 12.5mm Gyproc Duplex plasterboard of 10kg/m² or similar and either 5mm skim or Artex finish. To remaining ceilings provide 12.5mm Gyproc plasterboard or similar with finishes as above.

Lintels
All coded lintels as stated in Schedule or marked on plan to be by I.G. To be installed in strict accordance with manufacturers instructions. Form d.p.c. cavity tray above all lintels. To all exposed lintels i.e. not sheltered from overhanging eaves, etc. to have proprietary weepholes to joints of brickwork at approximately 450mm c/c. To be confirmed on site with Building Control Surveyor

Opening at eaves level to be L1/E lintels by I.G. or similar approved.

All windows to give minimum 1/20th of floor area as ventilation and to be double-glazed.

All external lintels to be insulated type.

All external joinery to be fully draught proofed.

Loft hatch to be draught sealed and latched shut.

Insulation in roof space to meet with insulation in external cavity walls to prevent cold bridging.

Seal all openings and joints to perimeter walls.

All doors, windows and any loft hatches to be effectively sealed and draught proofed.

First floor habitable rooms shall have means of escape windows with openings of at least 450mm wide x 450mm high and a minimum area of 0.33m². Escape windows to be within 1.1m of floor.

General Notes

Do not scale from this drawing.

This drawing is copyright and may not be altered, traced, copied, photographed or used for any purpose other that that for which it is issued without written permission from Messrs Status Design

The General Contractor is to check all dimensions on site and report discrepancies to the Architect

All details shown on this drawing are based upon typical site conditions related to the area. No responsibility can be accepted for abnormal conditions unless reported to the Architects so that design amendments may be considered. Site soil surveys are recommended at request of foundations to establish specific site conditions before foundation work is undertaken

Please note this drawing is not a conveyance drawing

Proposed on-site soakaways to be maintained by the owner for the life duration of the property.

This drawing is limited to the amount of information contained and does not purport to contain a full specification of the works. It is solely for the purpose of obtaining Planning and Building Regulations approval. This drawing must not be used as a contract document alone. The works will not be supervised or inspected by Status Design unless specifically contracted to do so. It is the client or their agent's responsibility to control workmanship, substitution of materials, reference to specification, variations to contract, etc.


All materials to be new unless stated otherwise and all components and materials, etc. to be used, fixed and installed, etc. in strict accordance with manufacturers' instructions and relevant Code of Practice. Materials should conform to appropriate British Standard specifications or BBA Certificate or European Code equivalent.

The Employer/Client shall ensure that the selected contractor is conversant with and adopts all measures necessary to achieve compliance with Health and Safety Legislation for Building Sites and Work Places. The Employer/Client is advised that should the works need to comply with the Construction Design and Management Regulations 2015 (CDM) and Health and Safety at Work, etc. Act 1974 (HSW Act) an independent Planning Supervisor will be required, whom should be supplied with a set of all relevant drawings, etc.


The works shall comprise of all that shown on the drawings and information, etc. Works that may not specifically be shown but may be reasonably inferred as necessary to carry out the works shall be deemed to be included.

These notes relate to this drawing and all associated drawings.

It is the property/landowner's responsibility to be aware of the Party Wall, etc. Act 1996 when building or carrying out alterations in close proximity to adjoining neighbour's boundaries.

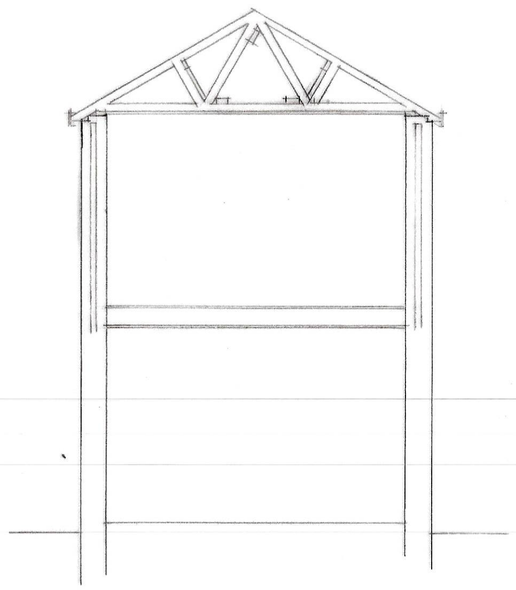

SECTION

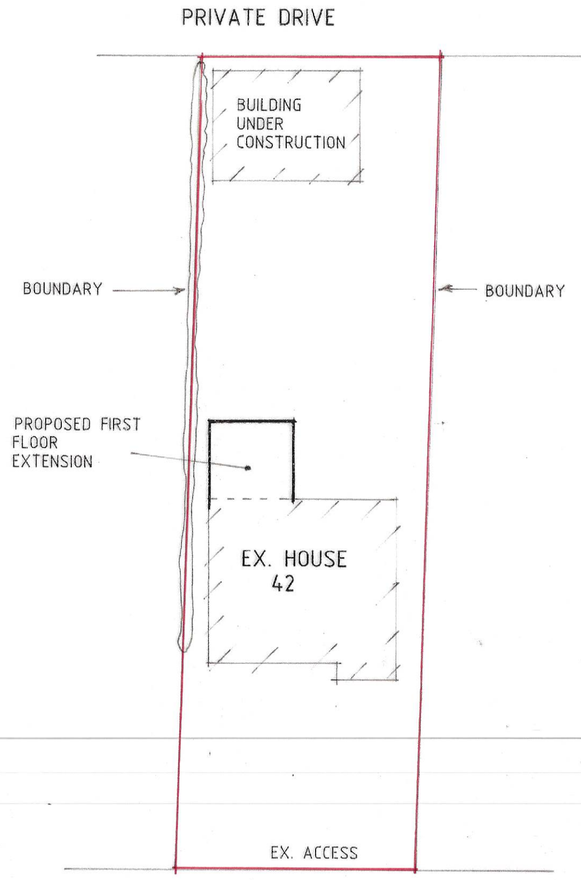

SITE PLAN

THIS DRG. TO BE READ IN CONJUNCTION WITH SD20-012/1, SD20-012/2

Status DESIGN
CONSULTANTS IN ARCHITECTURE & PLANNING

PROPOSED EXTENSION AT 42 STATION ROAD, LONG SUTTON FOR

MR. D. BROWN.

SECTION / SITE PLAN

1:50	1:200	SD20-012/3
AUG-20		B.GILHAM.

2 Edinburgh Walk, Holbeach, Spalding, Lincs. PE12 7AP
Tel: 01406 424343 Fax: 01406 490702