PROPOSED RESIDENTIAL DEVELOPMENT AT SEAGATE ROAD, LONG SUTTON, SPALDING, PE12 9AD

FLOOD RISK ASSESSMENT



View from eastern side of site

S M Hemmings B Sc C Eng MICE MIWEM,
40 Celta Road,
Peterborough,
PE2 9JD

This flood risk assessment has been prepared solely to support the planning application for a development at Seagate Road, Long Sutton. The author has made every effort to provide an accurate assessment of the flood risk but accepts no liability should the information be found to be incorrect or incomplete, or if it is used for any other purposes other than for which it was originally commissioned.

Introduction


An application is due to be made to South Holland District Council for Planning Permission to carry out a residential development on land west of Seagate Road at Long Sutton. The land is at present agricultural land and is south of the centre of Long Sutton and south of the A 17 road.

The site is within Flood Zone 3 as shown on the Environment Agency's Flood Zone Map. These maps do not take into account existing flood defences.

The Planning Application requires a Flood Risk Assessment to be carried out as specified in the Practice Guidance to the National Planning Policy Framework Development and Flood Risk. The site is shown within the defended area of the South Holland District Council's Strategic Flood Risk Assessment (SHDC SFRA) map and is located in the South Holland Internal Drainage Board district.

Environment Agency (EA) Flood Zones

The map below is taken from the Environment Agency website and shows the flood zones in the area.

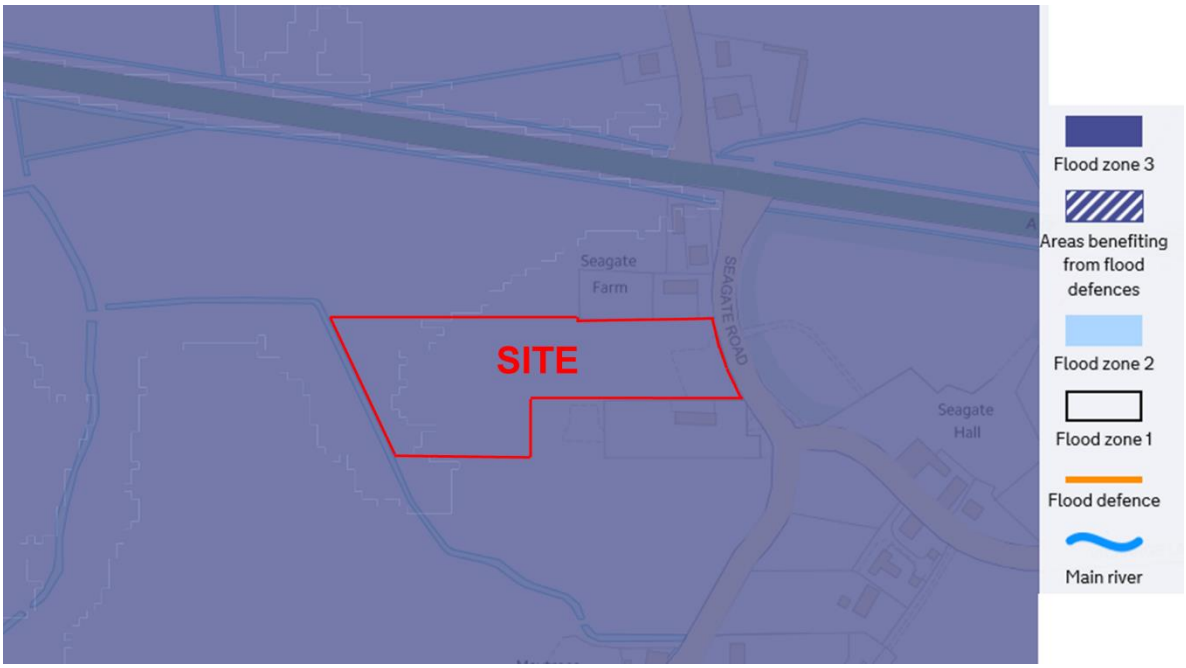

It can be seen that the whole of this area on the southern side of Long Sutton is in Flood Zone 3.

Application Site

The development is located on the western side of the River Nene. The National Grid Reference of the site is 543450 321750.

The location of the site is shown on the plan at the end of this document.

As the site is within a defended area the proposed development can be considered to be within Flood Zone 3(a) as detailed on the Environment Agency's flood zone maps without defences, as defined in Table 1 of the Technical Guidance.

Applying the flood risk vulnerability classification in Table 2 of the Guidance, a development consisting of a dwelling house is classified as “more vulnerable”.

Table 3 of the Guidance is shown below:

Flood Zones	Flood Risk Vulnerability Classification				
	Essential infrastructure	Highly vulnerable	More vulnerable	Less vulnerable	Water compatible
Zone 1	✓	✓	✓	✓	✓
Zone 2	✓	Exception Test required	✓	✓	✓
Zone 3a †	Exception Test required †	✗	Exception Test required	✓	✓
Zone 3b *	Exception Test required *	✗	✗	✗	✓*

Therefore it can be seen that for “More vulnerable” development the sequential and the exception tests need to be applied to the development.

Sequential Test

The aim of the Sequential Test, as set out in the Planning Practice Guidance, is to ensure that a sequential approach is followed to steer new development to areas with the lowest probability of flooding. The flood zones as defined in the Strategic Flood Risk Assessment for the area provide the basis for applying the Test. The aim is to steer new development to Flood Zone 1 (areas with a low probability of river or sea flooding). Where there are no reasonably available sites in Flood Zone 1, local planning authorities in their decision making should take into account the flood risk vulnerability of land uses and consider reasonably available sites in Flood Zone 2 (areas with a medium probability of river or sea flooding), applying the Exception Test if required. Only where there are no reasonably available sites in Flood Zones 1 or 2 should the suitability of sites in Flood Zone 3 (areas with a high probability of river or sea flooding) be considered, taking into account the flood risk vulnerability of land uses and applying the Exception Test if required.

The whole of this area on the south side of Long Sutton, as can be seen from the map on page 2 of this report, is in Flood Zone 3. Therefore it would be difficult to find a similar site for development in the vicinity of Long Sutton that is in a lower flood zone. The site has similar predicted flood depths for all of the area south of Long Sutton, and therefore the flood hazard on all sites to the south of Long Sutton is also similar. The safety of the development will be delivered by ensuring the floor level of the proposed new dwellings is above predicted residual flood levels for this area.

The South Holland District Council Core Strategy states that there is a limited number of sites outside the town of Spalding available for residential development. Therefore

there is a requirement for further land to be brought forward and used for residential development.

Therefore I consider that the sequential test has been passed.

Exception Test

The Sequential Test has demonstrated that it is not possible, consistent with wider sustainability objectives, for the development to be located in zones with a lower probability of flooding. Therefore the Exception Test must be applied and for this to be passed:

- It must be demonstrated that the development provides wider sustainability benefits to the community that outweigh flood risks, informed by the Strategic Flood Risk Assessment; and
- A site-specific flood risk assessment must demonstrate that the development will be safe for its lifetime taking into account of the vulnerability of its users, without increasing flood risk elsewhere, and where possible will reduce flood risk overall.

Both parts of this test must be satisfied in order for the development to be considered appropriate in terms of flood risk. There must be robust evidence in support of every part of the test.

The first section will be demonstrated by the Supporting Planning Statement and compliance with South Holland District Council's planning policies.

This flood risk assessment will demonstrate that the development will be safe for its lifetime and it will not increase flood risk elsewhere.

Strategic Flood Risk Assessment

Consultants have produced a Strategic Flood Risk Assessment (SFRA) for the South Holland District Council (SHDC). This document provides details of the flood risk in the Council's area. Reference to the maps in this document give the following information for the flood risk and hazard at the site for the 1% fluvial event and 0.5% tidal event.

The maps illustrate the actual flood hazard which is as follows:

For the present day	Depth of flooding … zero
	Extent of flooding .. Low or medium
	Velocity ……. Nil
For year 2115	Depth of flooding … 0 – 500mm
	Extent of flooding .. High
	Peak Velocity …… 0.1 – 0.25 m/sec

The maps showing the residual flood hazard were revised in the 2016 update of the South Holland District Council Strategic Flood Risk Assessment which can be found

on the website of the South East Lincolnshire Joint Planning Committee. The hazards are as follows for the 1% fluvial or 0.5% tidal event probability:

For the present day	Depth of flooding….	zero
	Extent of flooding …	low or medium
	Hazard …….	zero
	Velocity ……..	zero
For the year 2115	Depth of flooding ….	250mm – 500mm
	Extent of flooding …	High
	Hazard ……	Danger for some (0.75 – 1.25)
	Velocity …….	0 – 0.3m/sec

Figure 16 of the general maps shows that the site is not within the rapid inundation zone for the present day or in 2115.

Maximum flood level and bank levels in the River Nene

The maximum levels in this tidal section of the River Nene 4.6km east of the site are as follows:

	2007	2115
Peak 1 in 200 year level	5.85m OD	6.19m OD
Peak 1 in 1000 year level	6.99m OD	7.33m OD

The defence level (top of left bank) between South Holland Main Drain and the A17 Bridge is approximately 7.00m OD. However there is a low section adjacent to the bridge itself at a level of 5.95m OD. Levels of the defence north of the A17 bridge are approximately 6.30m OD.

Information from Environment Agency

The Environment Agency has produced mapping which shows the maximum hazard, depth and velocity predicted following breaching of the tidal defences of the tidal River Nene east of the site. The EA have stated that the site would not be affected by overtopping of the defences.

The maps of breaching show the following predictions for hazard, maximum depth and maximum velocity on the site of the proposed house and garage:

	Maximum Hazard	Maximum Depth	Maximum Velocity
1 in 200 year in 2006	zero	zero	zero
1 in 1000 year in 2006	zero	zero	zero
1 in 200 year in 2115	0.75 – 1.25	250mm – 500mm	0 – 0.3m/sec
1 in 1000 year in 2115	0.75 – 1.25	250mm – 500mm	0 – 0.3m/sec

The maps supplied by the Environment Agency are reproduced on pages 13 – 16 of this report.

Existing Flood Alleviation Measures

The site is within a defended flood plain, as defined in Appendix 1 of the Environment Agency's "Policy and Practice for the Protection of Flood Plains", which is considered to be passive until such time that a flood greater than the defences can withstand occurs. The likelihood of flooding occurring due to overtopping or failures of the defences is considered to be very low.

The site is located approximately 4.6 km from the tidal section of the River Nene, which is maintained by the Environment Agency.

There are watercourses in the area that are maintained by South Holland IDB.

Existing Ground Levels

A topographical study of the part of the site where the new house and garage will be located has been carried out which will be submitted as part of the planning application. The levels from this study in the proposed location of the house and garage have been used to produce a cross section west to east across the site which is shown on page 9 of this report.

The lowest part of this site is on the western side where levels are approximately 2.80m OD. The levels rise towards Seagate Road to levels of approximately 3.00m OD. The level of Seagate Road rises from 2.75m OD at southern end alongside the site to 3.21m OD on the northern end alongside the site.

Potential Sources of Flooding

The potential sources of flooding to the site are:-

1. Failure or overtopping of tidal defences of the River Nene.
2. High water levels in IDB drainage channels.
3. Localised flooding due to failure of highway drainage

1. Failure or overtopping of tidal defences of the River Nene

The west bank of the River Nene is approximately 4.6 km east of the site of the proposed development, and the Wash Banks are 8 km north of the site at their nearest point. The hazard from the River Nene east of the development site if a breach occurred in the length of bank between the South Holland Main Drain Outfall and the A17 bridge will be considered to be the major risk to the site.

The maps in the SFRA do not predict any actual flooding to this area of Long Sutton in a 1 in 200 year event in the present day, but the 2115 map predicts flood depths of up to 500mm in depth.

The maps supplied by the Environment Agency predict flood depths of between 250mm and 500mm if a breach were to occur in a 1 in 200 year event in 2115. It is

likely that this flood water will take at least 24 hours to reach the site, during which time residents will have been warned of the eventuality. The EA breach mapping also assumes no attempt is made to immediately repair the breach. It is also likely that the EA will undertake further bank raising within the next 100 years to ensure that there is a continuing 1 in 200 year defence to Long Sutton and Sutton Bridge.

The predicted hazard will be mitigated by raising ground floor levels of the proposed buildings above the predicted flood level in a 1 in 200 year event in 2115.

2. **High Water Levels in IDB drains**

Although the whole of this area is below high tide level in the Wash and the River Nene, the retained water levels in the drainage channels ensure that the risk of flooding is extremely low. South Holland IDB maintains a system of sluices, pumping stations, and drainage channels which convey surface water into the River Nene and the wash and control water levels throughout the South Holland IDB area.

This area of Long Sutton is within the “Free Discharge” catchment which depends on drainage into the South Holland Main Drain. There is an IDB maintained drain on the western boundary of the site, which is approximately 150 metres west of the proposed house. This flows into a watercourse which flows southwards in open watercourses alongside St James Road and Spendla’s Lane and discharges into the South Holland Main Drain. This watercourse flows eastwards and discharges into the River Nene during low tide periods.

The channels maintained by South Holland IDB in urban areas are classified as high priority watercourses and as such receive a higher maintenance priority.

There are possibilities of failure of outfall sluices, but these are mitigated by the high level of maintenance given to these structures by the IDB. If a failure did occur the IDB would immediately be warned of the problem by their telemetry system and take action to repair the fault or to bring in temporary pumps to reduce the risk of any flooding in the area. Similarly any failures of culverts or other blockages would be dealt with immediately.

IDB systems are designed to provide a freeboard of between 600mm and 1000mm to all land in a 1 in 10 year return period rainfall event. This normally provides a standard of service of between 1 in 50 years and 1 in 100 years against flooding. In an extreme event water levels will rise but this will be a slow process and it would be at least 24 hours before levels were high enough to begin to flood low land in the area, and after this the level of the flood water would need to rise another 1.0 metre before the development site would be affected.

Therefore the risk of flooding from IDB drainage channels can be considered to be extremely low, and will be mitigated by the raising the ground floor levels to the levels required to be above the 1 in 200 year tidal flood.

3. **Localised Flooding due to failure of highway drainage**

It is anticipated that the surface water from the new house and garage will be discharged into the soakaways, and smaller areas of hardstandings and site access roads would be constructed with pervious concrete paving, or similar porous materials, with a suitable granular sub base to adequately soakaway the surface water from these areas. These would be designed to BRE digest 365 using rainfall values for a 1 in 100 year event with 30% increase for climate change and approved under the Building Regulations.

The raising of ground floor level of the proposed house will mitigate the risk of surface water flooding to the proposed house and garage.

Extent of known Flooding

During the preparation of this assessment, no evidence was discovered of the site or any of the adjoining properties having been flooded in the past.

Probabilities and Trends of Flooding

The probability of this development flooding from Environment Agency main river is very low. In an extreme event any effect on this location would not be sudden and there would be time for residents to take precautionary measures to limit the impact of any flooding that may occur.

Residual Risk – Extreme Events

The residual risk from extreme events is very low on this site. The major risk to the site is from a breach or overtopping of the tidal defences

The risk of this happening in this case is low and the hazard from any flooding is also low.

Climate Change

The predictions of flood depths for this flood risk assessment use information provided by the Environment Agency which was produced in 2006. The EA have issued new guidance on recommended contingency allowances for predicted sea level rises, fluvial flows and rainfall intensities which from 19th February 2016 needs to be considered in the FRA. The effects of these new recommendations are considered in Appendix A of this report (pages 17 to 20). It is concluded that no extra mitigation measures are necessary to comply with the new guidance on climate change.

South East Lincs Advice Matrix

Advice can be found on the recommended mitigation required by referring to a spreadsheet on the South East Lincolnshire website. As the development is in flood zone 3 and the predicted flood hazard is between 0.75 and 1.25 (Danger for some) this development fall in category should be made to Category E8 which states:

The NPPF requires that the proposal is accompanied by a Flood Risk Assessment which contains evidence that appropriate mitigation measures / flood resilience techniques have been incorporated into the development.


The applicant is advised to refer to the document "Improving Flood Performance of New Buildings Flood Resilient Construction (DCLG2007).

Finished floor levels (FFL) should be informed by the predicted flood depth maps (refer to the relevant 2115 1% fluvial and 0.5% tidal maximum depth map) and set as required below. Single storey proposals must set FFL's above the 0.1% event breach depth in the 2115 scenario. For depths between 250mm and 500mm finished floor levels should be set 500mm above ground level with flood resilient construction to a height of 300mm above the predicted flood depth.

Summary of Risk of Flooding to the Site


The main risk of flooding to the site is if a breach were to occur in the west bank of the tidal River Nene. The risk of this happening along this section of bank can be considered to be low. The bank has a wide top and bank slopes are not steep.

The relevant part of the Environment Agency map showing the predicted peak depths in this area if a breach occurred in the west bank of the River Nene in 2115 in a 1.0% fluvial and 0.5% tidal event probability is shown below

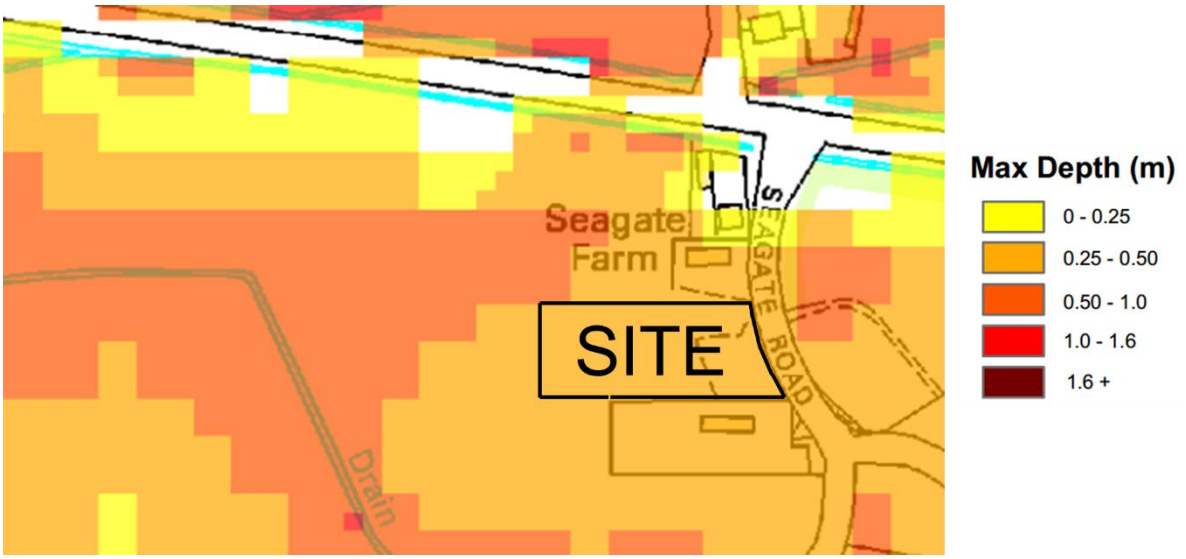

The map above predicts flood depths of between 250mm and 500mm across the site.

A cross section has been drawn from west to east across the site using the levels on the topographical study, and the information from the breaching map has also been shown.

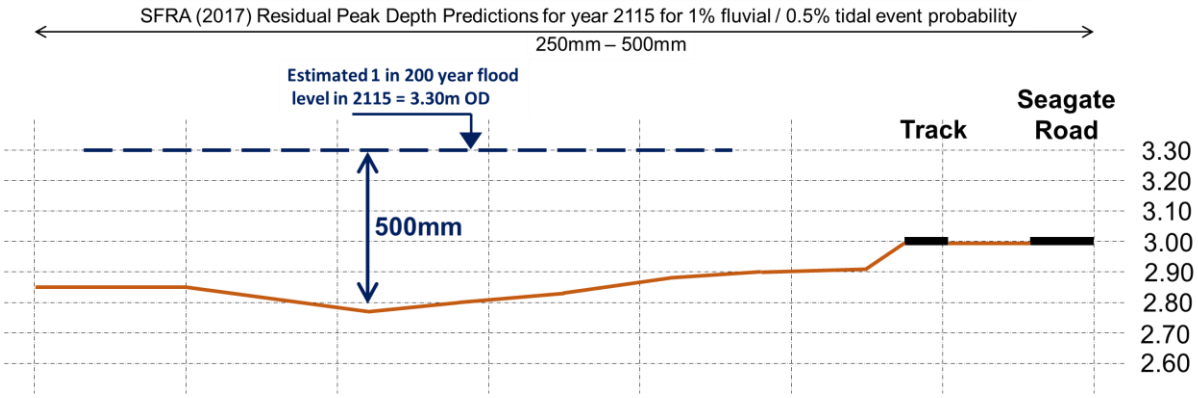

It can be concluded that the highest estimated flood level at this site is 3.30m OD in a 1 in 200 year event in 2115.

Recommendations

In any area at risk of flooding it is recommended that any new dwellings should be of two story construction with all bedrooms at first floor level. This will provide a refuge for residents if the building becomes flooded after a major breach of the tidal bank, and ensure there is no danger to residents when they are asleep.

The ground floor level of the proposed house should be a minimum of 3.30m OD which is approximately 400mm above the existing ground level.

Flood resilient construction should be incorporated to a minimum height of 300mm above the predicted flood level, and all of the electrical installation should be a similar height above finished floor level.

Occupiers of the property should register with the Environment Agency's Floodline Warnings Direct Service.

Surface water from the roofs of the proposed buildings should be discharged into soakaways and these should be designed to BRE Digest 365 and approved under Building regulations.


All future owners and occupiers of the building should be given a copy of the Flood Risk Assessment so that they are fully aware of the risk of flooding in this area.

S M HEMMINGS B Sc C Eng MICE MIWEM


stuart.hemmings@btinternet.com

12th October 2019


LOCATION PLAN

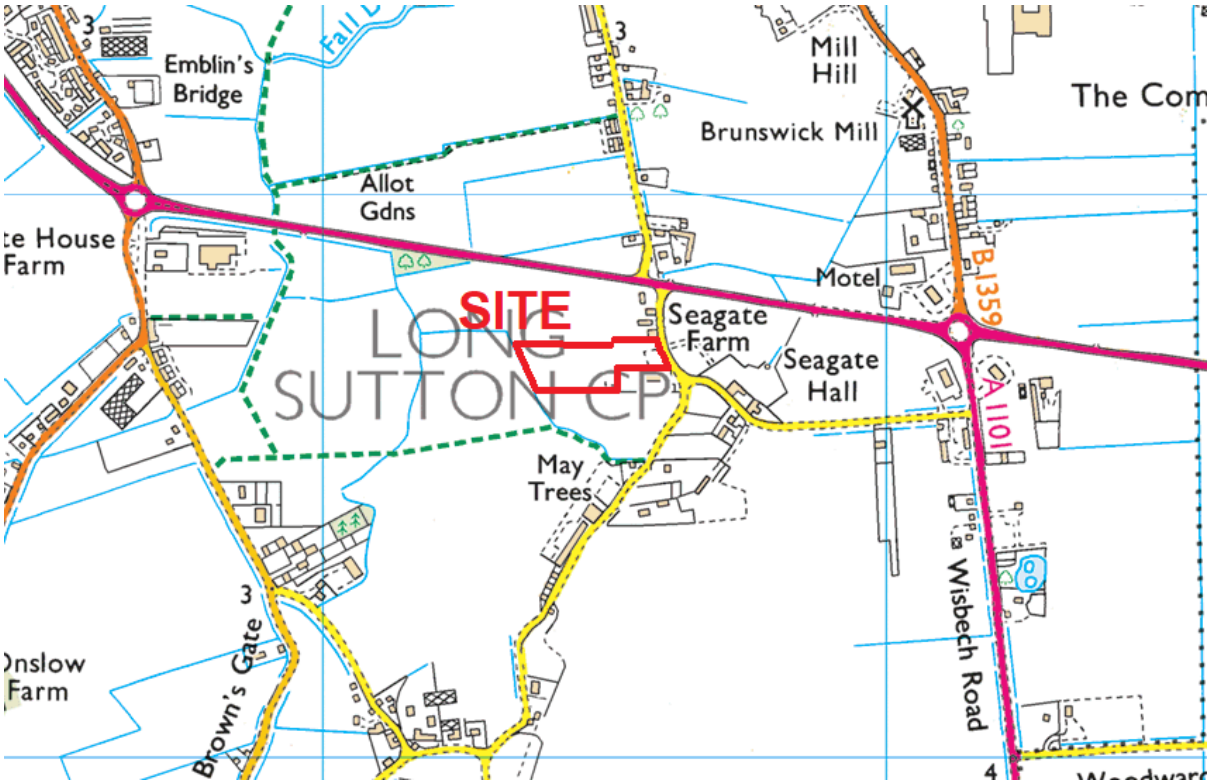


PLAN OF IDB DRAINS

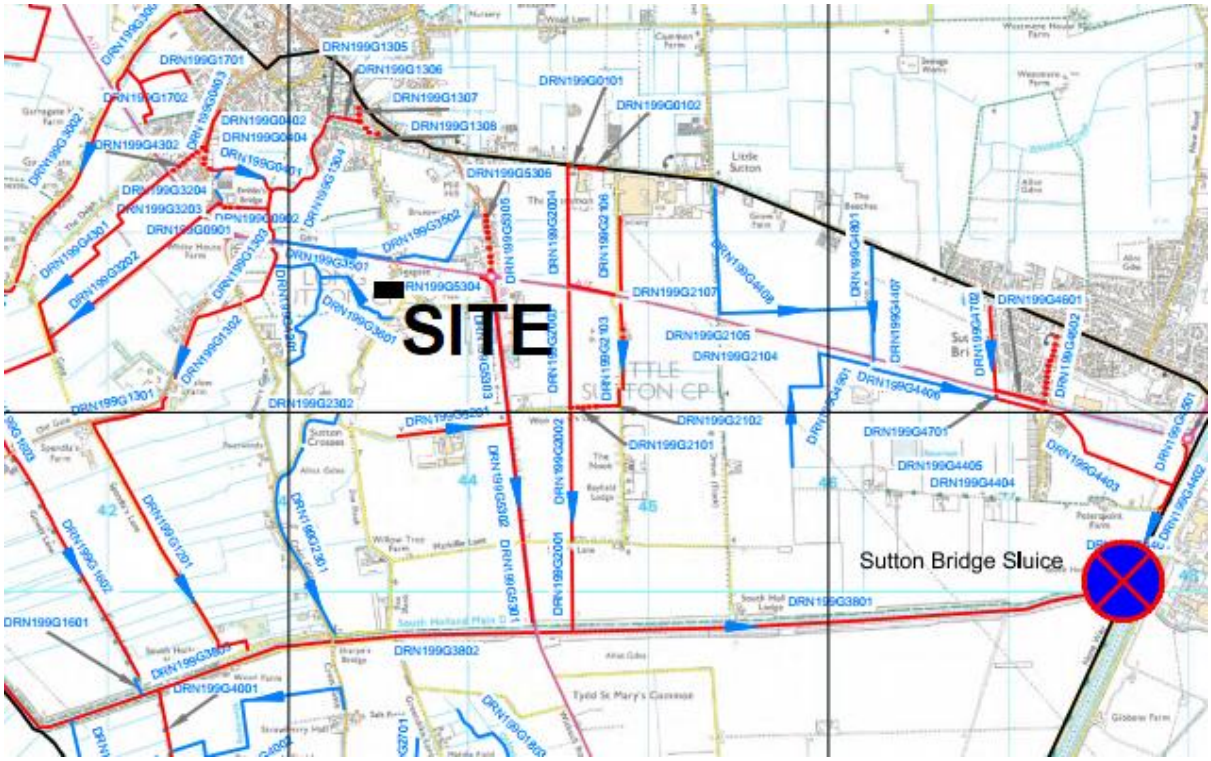


PLAN OF PROPOSED DEVELOPMENT

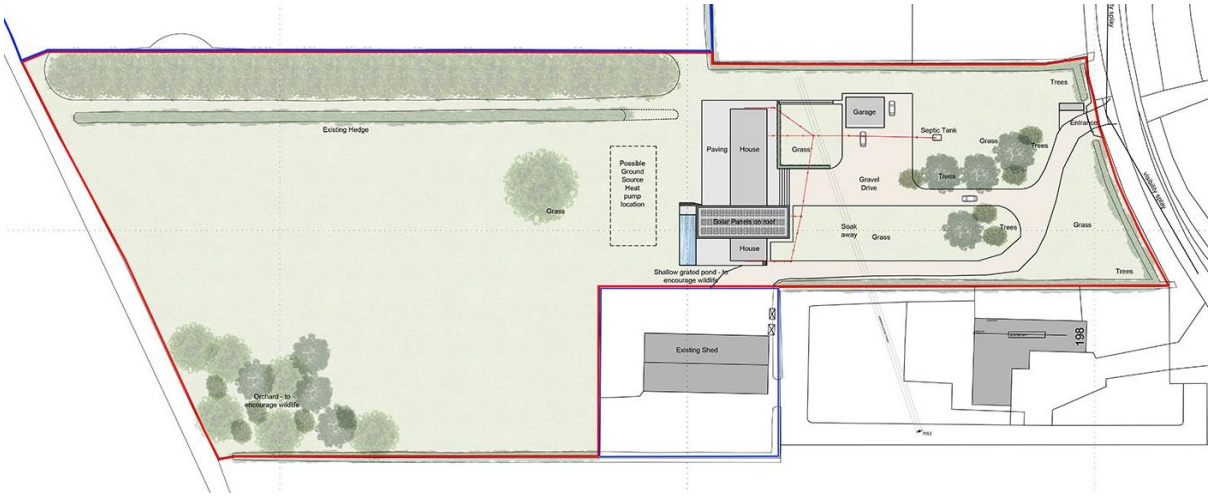

EA MAP SHOWING TIDAL BREACHING HAZARDS IN 1 in 200 YEAR EVENT IN 2006

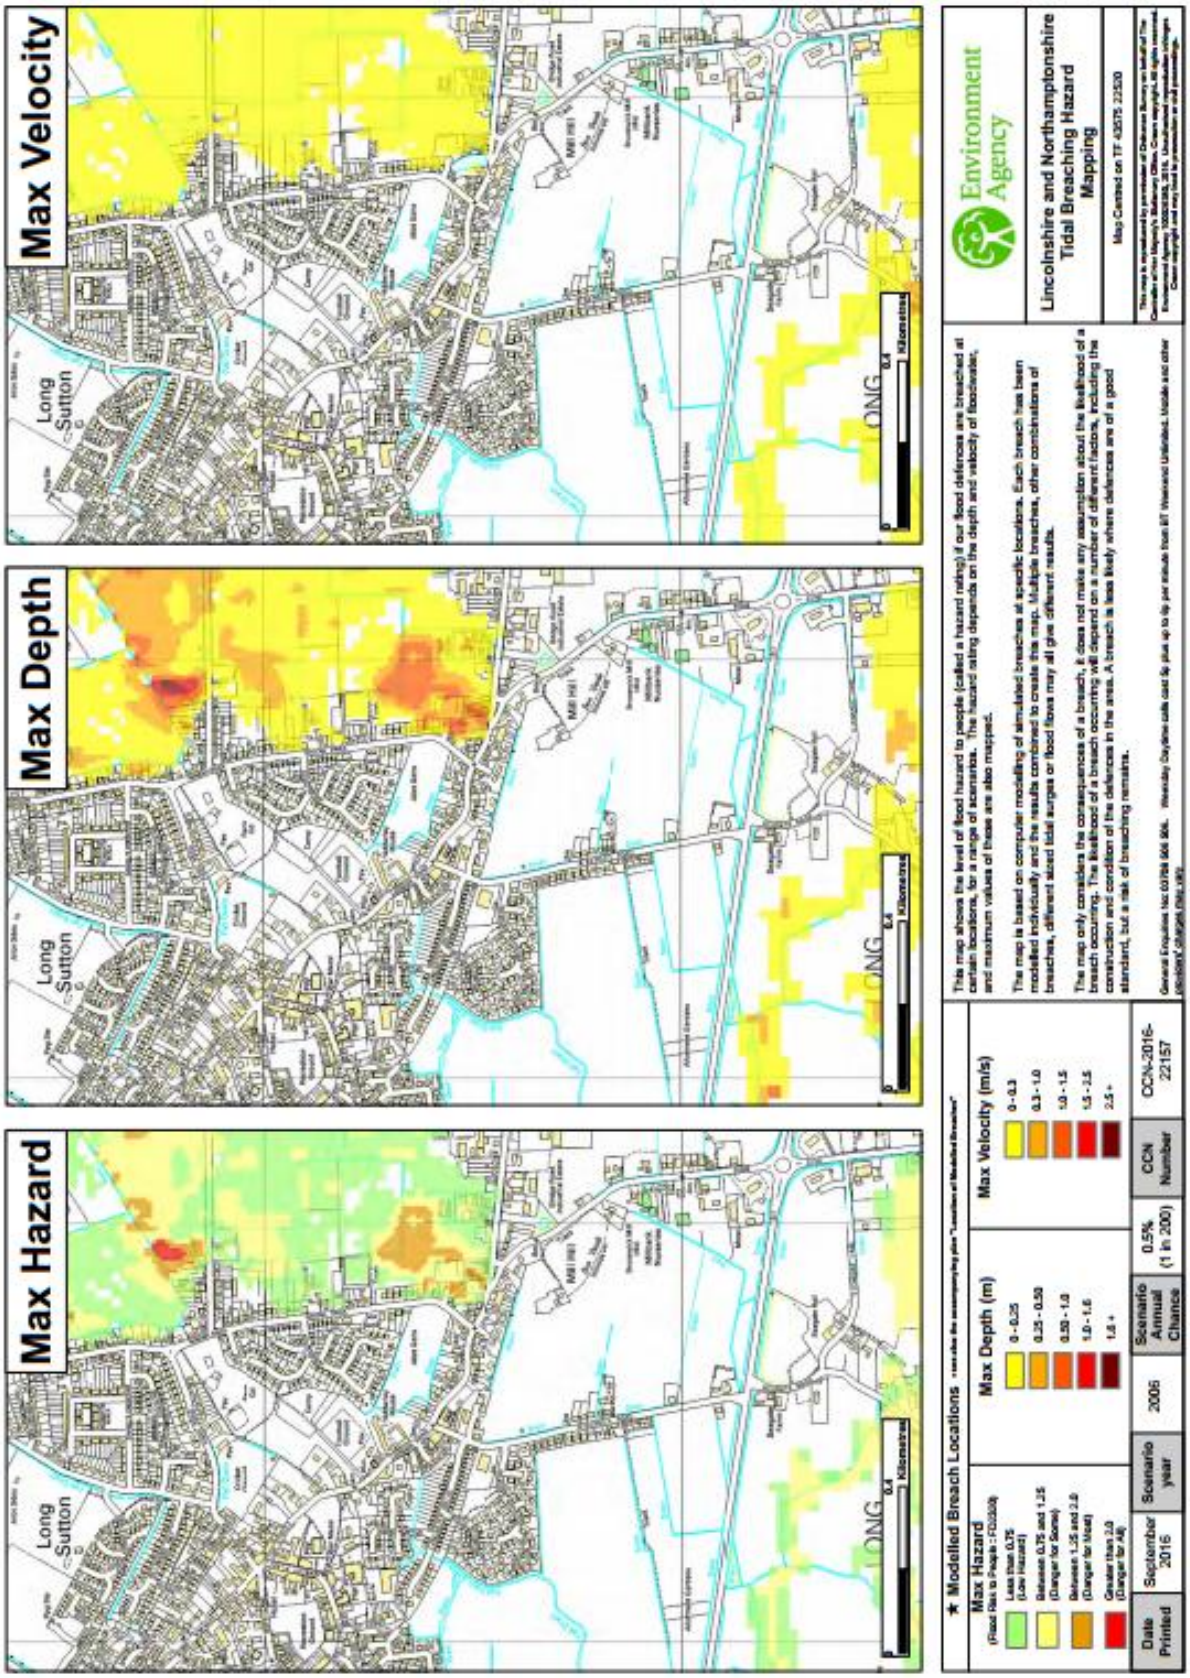


EA MAP SHOWING TIDAL BREACHING HAZARDS IN 1 in 1000 YEAR EVENT IN 2006

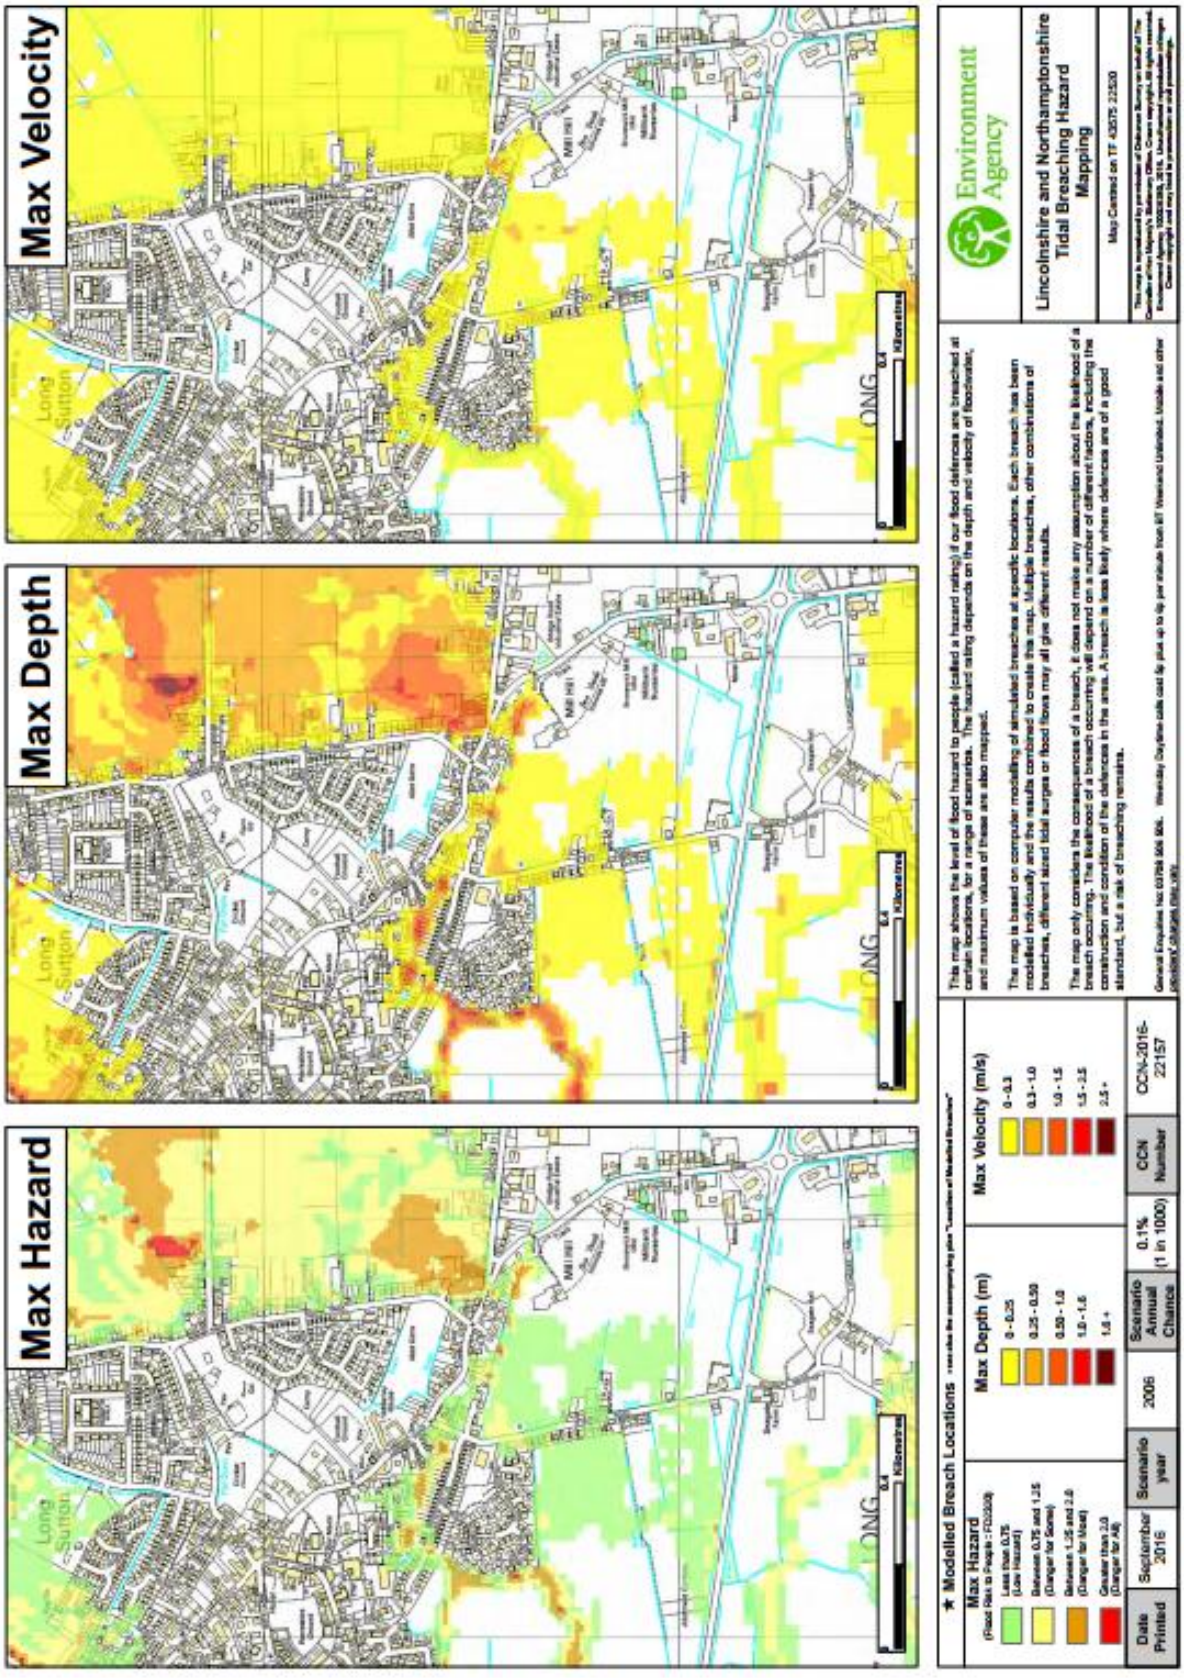


EA MAP SHOWING TIDAL BREACHING HAZARDS IN

1 in 200 YEAR EVENT IN 2115

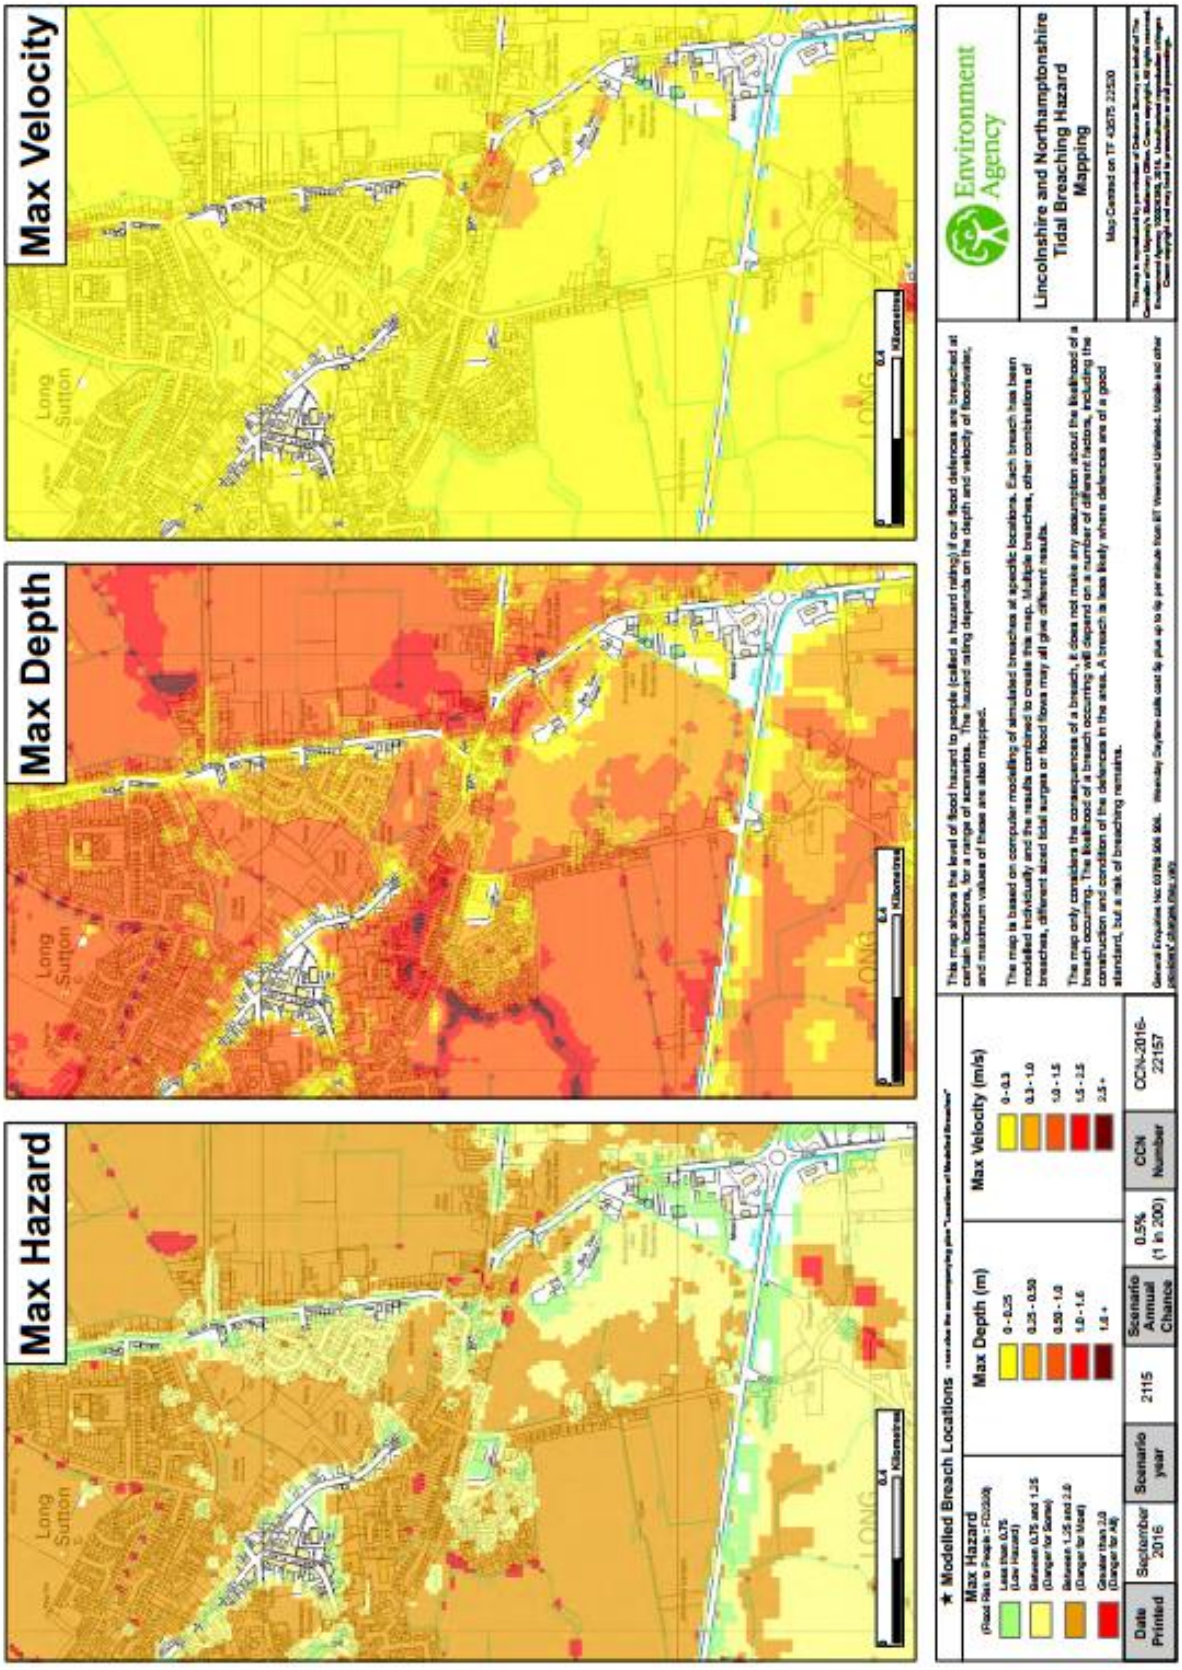

EA MAP SHOWING TIDAL BREACHING HAZARDS IN

1 in 1000 YEAR EVENT IN 2115

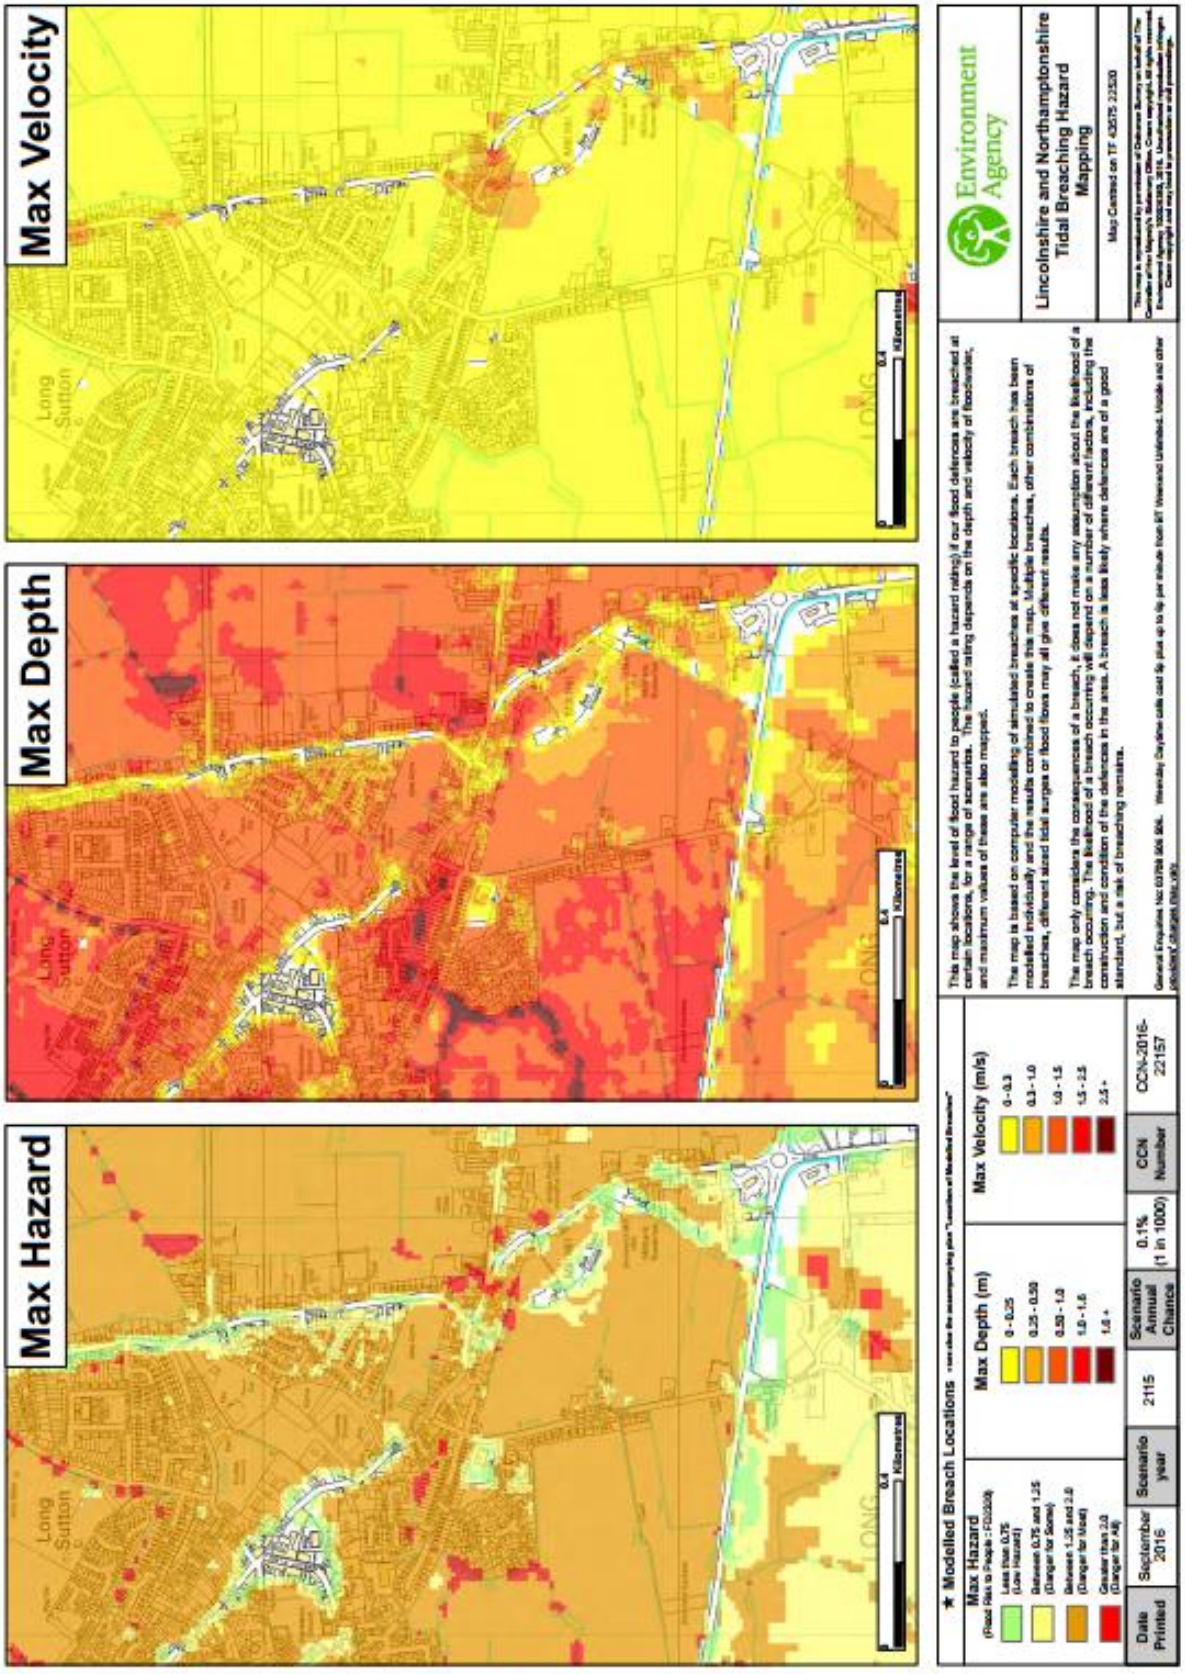

APPENDIX A CLIMATE CHANGE

The Environment Agency has issued revised guidance on climate change and have now stated that the new predictions should be considered and incorporated into all flood risk assessments produced after 19th February 2016.

Listed below are the climate change allowances in three documents:

- South Holland SFRA
- EA guidance (2013)
- Revised EA guidance

The recommendations in each document are shown below.

2010 South Holland DC SFRA

The SHDC SFRA states that the the following allowances have been made for climate change:

4.4 Climate Change

Scenarios for the years 2055 and 2115 include for climate change contingency allowances to the amount suggested by PPS25[1]. These allowances are expressed in *Table 2*. Percentage increases are relative to the present-day.

Table 2 – Adopted Climate change contingency allowances

Parameter	Year 2055	Year 2115
Sea level rise (m)	+ 0.33	+ 1.14
Extreme wave height	+ 10%	+ 10%
Peak river flow and volume	+ 20%	+ 20%
Peak rainfall intensity	+ 20%	+30%

Where flows arise from pumping rather than natural run-off, notably in the Vernatt's Drain and for the Fenland subcatchments of the South Forty Foot Drain, peak flow rates for future eras have been taken as equal to current rates since this SFRA assumes all flood risk management measures will remain in their current state.

2013 Guidance to Planners

Guidance to planners was issued by EA in September 2013

Table 1: Recommended contingency allowances for net sea level rises (Net sea level rise (mm per year) relative to 1990)

	1990 to 2025	2025 to 2055	2055 to 2085	2085 to 2115
East of England, east midlands, London, south-east England (south of Flamborough Head)	4.0	8.5	12.0	15.0
South-west England	3.5	8.0	11.5	14.5
North-west England, north-east England (north of Flamborough Head)	2.5	7.0	10.0	13.0

document is out of date

Table 2: Recommended national precautionary sensitivity ranges for peak rainfall intensity, peak river flow, offshore wind speed and wave height

Parameter	1990 to 2025	2025 to 2055	2055 to 2085	2085 to 2115
Peak rainfall intensity	+5%	+10%	+20%	+30%
Peak river flow	+10%	+20%		
Offshore wind speed	+5%		+10%	
Extreme wave height	+5%		+10%	

s been withdrawn (19

Revised 2016 EA Guidance

Table 1 peak river flow allowances by river basin district (use 1961 to 1990 baseline)

River basin district	Allowance category	Total potential change anticipated for '2020s' (2015 to 39)	Total potential change anticipated for '2050s' (2040 to 2069)	Total potential change anticipated for '2080s' (2070 to 2115)
Anglian	Upper end	25%	35%	65%
	Higher central	15%	20%	35%
	Central	10%	15%	25%

For more vulnerable development in flood zone 3(a) the higher central and upper end should be used to assess the range of allowances.

Table 2 peak rainfall intensity allowance in small and urban catchments (use 1961 to 1990 baseline)

Applies across all of England	Total potential change anticipated for 2010 to 2039	Total potential change anticipated for 2040 to 2059	Total potential change anticipated for 2060 to 2115
Upper end	10%	20%	40%
Central	5%	10%	20%

Table 3 sea level allowance for each epoch in millimetres (mm) per year with cumulative sea level rise for each epoch in brackets (use 1990 baseline)

Area of England	1990 to 2025	2026 to 2050	2051 to 2080	2081 to 2115	Cumulative rise 1990 to 2115 / metres (m)
East, east midlands, London, south east	4 (140 mm)	8.5 (212.5 mm)	12 (360 mm)	15 (525 mm)	1.24 m

Table 4 offshore wind speed and extreme wave height allowance (use 1990 baseline)

Applies around all the English coast	1990 to 2050	2051 to 2115
Offshore wind speed allowance	+5%	+10%
Offshore wind speed sensitivity test	+10%	+10%
Extreme wave height allowance	+5%	+10%
Extreme wave height sensitivity test	+10%	+10%

Effects on Predictions of Flood Risk in FRA

The FRA has identified the main source of flooding where the new climate change recommendations could affect the predictions of flood levels in 2115 at the development site is flooding from the tidal River Nene

The contingency allowance in metres for the years 2055 and 2115 using 1990 as a baseline in the SFRA compared with the guidelines is as follows

Year	SFRA	2013 guidance	Revised 2016 guidance
2055	0.33	0.395	0.412
2115	1.14	1.205	1.24

Therefore it can be seen that the revised guidance increases the maximum allowance for sea rise in 2115 by 100mm. This will not have the effect of increasing the predicted flood level at the site in a 1 in 200 year breach event in 2115 by the maximum of 100mm, but it will probably be only between 10mm and 50mm. It is unlikely that this increase will significantly change the maps of flood risk at present issued by the Environment Agency.

Flooding from IDB drainage system

As the development is in flood zone 3 and is classed as more vulnerable, the advice from the Environment Agency is that the higher central climate change allowance, which is 35%, should be considered. After considering the effects of this increase the upper end allowance, which is 65%, should be considered to assess the effect of this.

IDB's have been using an allowance of 20% for climate change over the past few years in their assessments and modelling of their systems. Generally IDB's are happy that their systems provide a 1 in 100 year standard to most urban areas at the present time.

South Holland IDB, and all IDB's, are aware that climate change will affect the operations of pumping stations, sluices and drainage channels. Pumping stations and sluices only have a 30 year life and will need to be refurbished or rebuilt within this timespan. It is assumed that South Holland IDB will continue to review the modelling they have already carried out and when the Board consider these refurbishments adequate arrangements will be made to incorporate the latest climate change projections in order that the Board continues to provide the same standard of service as the present day.

Therefore it is considered that the mitigation proposed for the development, with the recommendation that the floor levels should be a minimum level of 3.30m OD, is satisfactory.