




Energy Rating: Windows (WER)

WINDOW SYSTEM DETAIL	
SYSTEM:	SUITE: Sculptured PROFILE: 4 Chamber TYPE: Casement
BEAD:	OUTER FRAME: LSW041 SASH: LSW041
OUTER FRAME:	LSW011
SASH:	LSW031
TRANSOM:	LSW022
GLAZING FLIPPER:	N
THERMAL DAM:	N
NOTES:	

GLAZING DETAIL	
GLAZING:	4-20-4
EXTERNAL PANE:	Optifloat
MIDDLE PANE:	n/a
INTERNAL PANE:	K Glass S
SPACER BAR:	Superspacer Premium
SPACER BAR SEALANT:	Hot Melt
GAS FILL:	Argon

THERMAL PERFORMANCE	
LINIAR SIMULATION REF:	W1464 rev. a
ENERGY INDEX: (kWh/m ² /year)	5.76
THERMAL TRANSMITTANCE: (u window)	1.32
SOLAR FACTOR: (g window)	0.71
AIR LEAKAGE: (L factor)	0.00

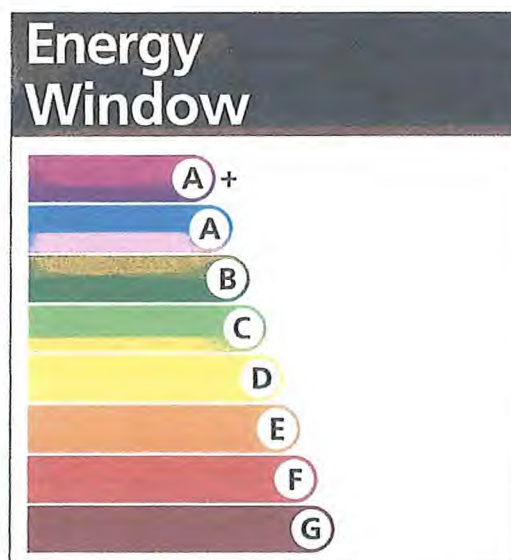

A RATING

This label is not a statutory requirement. It is a voluntary label provided as a customer service to allow consumers to make informed decisions on the energy performance of competing products.

Information should be used for guidance only.