

FLOOD RISK ASSESSMENT FOR INDUSTRIAL DEVELOPMENT AT POPLAR FARM, SPALDING

FINAL REPORT

ELLINGHAM CONSULTING LTD

ECL0059-1/ G H MYERS LTD

DATE OCTOBER 2019

DISCLAIMER

This document has been prepared solely as a Flood Risk Assessment in support of a planning application for Industrial Development at Poplar Farm, Moulton. "Ellingham Consulting Ltd" accepts no responsibility or liability whatsoever for any use made of this document other than by the client "G H Myers Ltd" for the purposes it was originally commissioned and prepared. All comments and opinions made are based upon information available to "Ellingham Consulting Ltd" during the necessary investigative process, and the conclusions and recommendations, could therefore, differ in the event of material subsequently being found erroneous, incomplete or misleading. "Ellingham Consulting Ltd" therefore, accepts no liability should this prove to be the case.

CONTENTS

1.0 INTRODUCTION

2.0 SITE LOCATION AND DESCRIPTION

- 2.1 Site Location
- 2.2 Existing Site
- 2.3 The Development
- 2.4 Local Development Documents
- 2.5 Available Flood Risk Information

3.0 FLOOD RISK VULNERABILITY

- 3.1 The Sequential and Exception Test
- 3.2 Vulnerability Classification
- 3.3 Application of the Sequential Test

4.0 SITE SPECIFIC FLOOD RISK

- 4.1 Local Flood Assets
- 4.2 Sources of Flooding
- 4.3 Probability of Flooding
- 4.4 Historic Flooding
- 4.5 Climate Change

5.0 FLOOD RISK MITIGATION AND RESIDUAL RISKS

- 5.1 Summary of Risks
- 5.2 Mitigation Measures
- 5.3 Residual Risks

6.0 CONCLUSIONS AND RECOMMENDATIONS

ATTACHMENT 1 – Location Plan and Existing Site Plan

1.0 INTRODUCTION

This Flood Risk Assessment has been prepared in accordance with National Planning Policy Framework (NPPF) and supporting planning practice guidance (PPG) on Flood Risk and Coastal Change.

In areas at risk of flooding or for sites of 1 hectare or more, developers are required to undertake a site-specific Flood Risk Assessment to accompany an application for planning permission. This Flood Risk Assessment has been produced on behalf of G H Myers Ltd in respect of the change of use from agriculture to industrial for an existing development that consists three buildings at Poplar Farm, Austendike Road, Moulton.

A planning application for the change in use is to be submitted by 3D Planning Ltd.

2.0 SITE LOCATION AND DESCRIPTION

2.1 Site Location

The site is located at Poplar Farm, Austendike Road, Moulton, PE12 6BZ. The National Grid Reference of the site is 52994/32166.

The location of the site is shown in Figure 1.

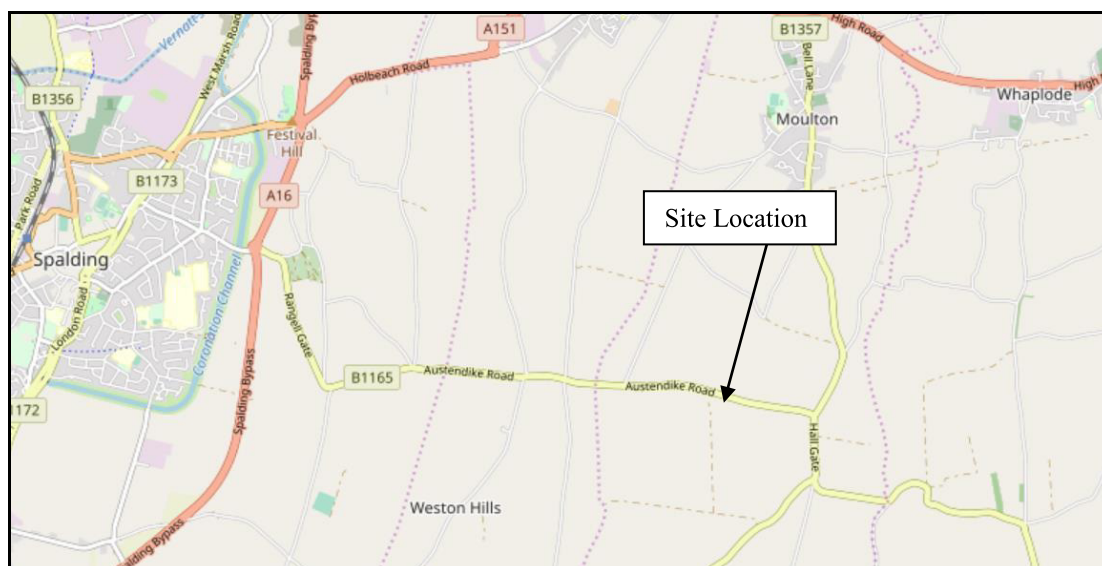


Figure 1 – Location Plan (© OpenStreetMap contributors)

2.2 Existing Site

The site is on the southern side of Austendike Road. The site consists of three buildings constructed and originally used for agriculture. The area of development is approximately 1.8 hectares.

Environment Agency LIDAR data shows that typical ground levels at the site are between +3.2m OD and +3.3m OD. Austendike Road is at a level of +3.5m OD adjacent to the site.

The site is in the South Holland Internal Drainage Board (IDB) District. The site and the surrounding land are within the Little Holland catchment and drains to Little Holland Pumping Station and discharge to the tidal River Nene at the Sutton Bridge Outfall Sluice.

The online British Geological Survey maps indicate that the site is likely to be underlain by West Walton Formation mudstone. The bedrock is shown to be overlain with superficial deposits of clay, silt and sand.

2.3 The Development

The development is for the change in use of the three buildings. The buildings were used for agriculture and will be used for industry.

2.4 Local Development Documents

The South East Lincolnshire Local Plan 2011 – 2036, adopted in March 2019, is the Local Plan for the district. Policy 4: Approach to Flood Risk states the requirements for flood risk reduction.

The South East Lincolnshire Level 1 and Level 2 Strategic Flood Risk Assessment (SFRA) was prepared in June 2017.

The Joint Lincolnshire Flood Risk and Drainage Management Strategy has been prepared by Lincolnshire County Council as the Lead Local Flood Authority. The purpose of the Strategy is to increase the safety of people across Lincolnshire by reducing the number of people at risk of flooding, increasing the resilience of local communities and reducing the impact of flooding

2.5 Flood Zones

The site is located within Flood Zone 3, an area with a high probability of flooding, of the Environment Agency Flood Maps for Planning as shown in Figure 2.

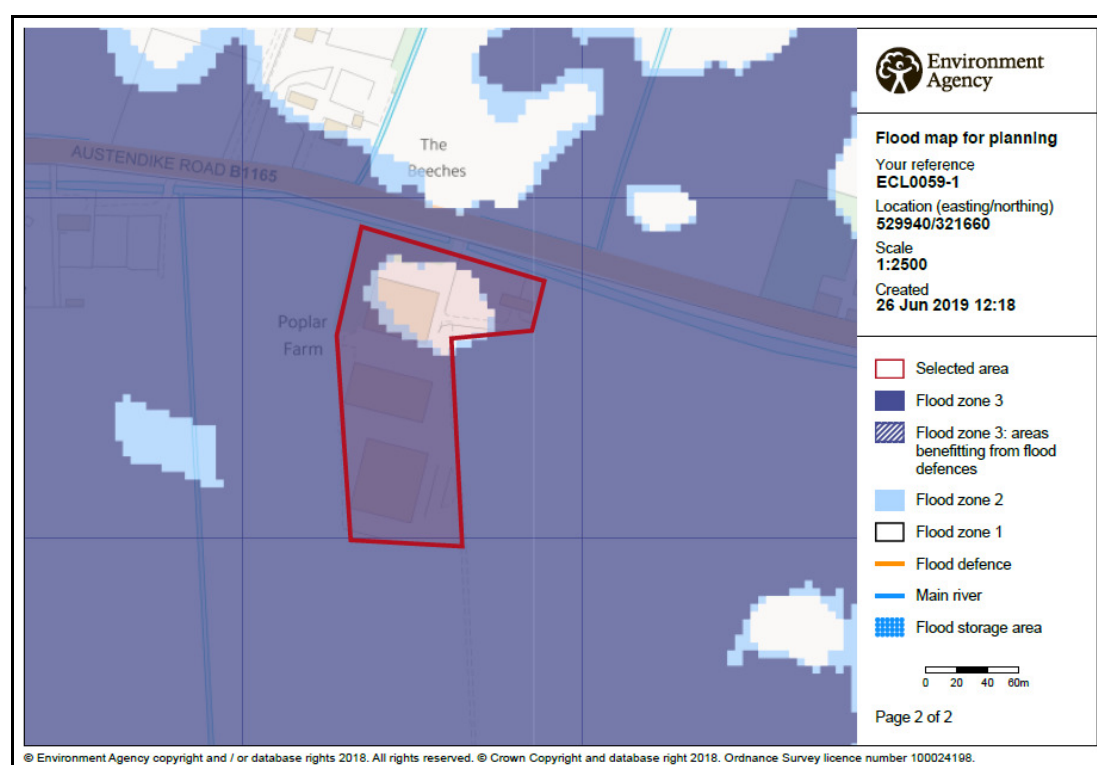


Figure 2 – Environment Agency Flood Map for Planning

The Environment Agency Long Term Flood Risk maps show that:

- the site has a medium risk of flooding from rivers or the sea (annual probability between 1% and 3.3%);
- a small area within the site is at risk of surface water flooding; and
- the site is not within an area at risk of reservoir flooding.

Within the South East Lincolnshire SFRA:

- the Residual Flood Hazard Map for the present day 1% fluvial and 0.5% tidal event shows that the site is outside of the 'Low Hazard' area;
- the Residual Flood Hazard Map for the 2116 1% fluvial and 0.5% tidal event shows that the site is outside of the 'Low Hazard' area;
- the Residual Peak Depth Map for the present day 1% fluvial and 0.5% tidal event shows that the site is not at risk of flooding; and
- the Residual Peak Depth Map for the 2116 1% fluvial / 0.5% tidal event shows that the site is not at risk of flooding.

3.0 FLOOD RISK VULNERABILITY

3.1 The Sequential and Exception Test

The NPPF requires the application of a Sequential Test to ensure that new development is in areas with the lowest probability of flooding.

The Exception Test is a method to demonstrate and help ensure that flood risk to people and property will be managed, while allowing necessary development to go ahead in situations where suitable sites at lower risk of flooding are not available.

3.2 Vulnerability Classification

Table 2 of the PPG Flood Risk and Coastal Change categorises different types of uses and development according to their vulnerability to flood risk. The development is covered by the description of buildings used for industry and is classified as 'Less Vulnerable'.

Table 3 of the PPG Flood Risk and Coastal Change sets out Flood Risk Vulnerability and flood zone 'compatibility'. The site is in Flood Zone 3 and the development is 'Less Vulnerable' therefore the development is considered appropriate. The development therefore does not require the application of the Exception Test.

PPG Flood Risk and Coastal Change defines that the lifetime of the development in terms of flood risk and coastal change is 100 years.

3.3 Application of the Sequential Test

The Sequential Test is required to be applied by the Local Planning Authority.

Large parts of the South Holland district between the River Welland and River Nene lie within Flood Zone 3. As such the opportunities to undertake the development at an alternative site within Flood Zone 1 are limited. The development is utilising previously developed land.

The River Nene and River Welland have defences that provide protection during the 0.5% annual probability (1 in 200 chance each year) event. The SFRA states that it is necessary to use the refined flood risk information (hazard and depth maps) to assist with the application of the sequential test. The hazard and depth maps show that the site is not at risk. Together with the standard of protection provided by the Environment Agency defences the site is considered to pass the sequential test.

4.0 SITE SPECIFIC FLOOD RISK

4.1 Local Flood Assets

The site is approximately 5km east of the River Welland and 4km east of the Coronation Channel. The Coronation Channel is a bypass channel of the River Welland constructed in the 1950's to convey river flows around Spalding. The Coronation Channel together with the Crowland and Cowbit Washes offer flood reduction to Spalding and the surrounding district. North of Spalding, downstream of the confluence with the Coronation Channel, the area is protected by the River Welland has tidal defences. The River Welland and the Coronation Channel are the responsibility of the Environment Agency.

There is a long-term strategy for the maintenance of the Environment Agency defences which is reviewed and updated every 5 years.

There is an extensive local drainage network managed by South Holland IDB. The Austen Dike, which runs along the northern boundary of the site, is an IDB High Priority Watercourse. The site and surrounding land are part of the Little Holland catchment and drain by gravity to Little Holland Pumping Station. The pumped water enters the South Holland Main Drain that discharges to the tidal River Nene at the Sutton Bridge Outfall Sluice.

During the operation and maintenance of its pumping stations, associated structures and channel systems, the IDB seeks to maintain a general standard capable of providing flood protection to its district. A routine maintenance programme is in place to ensure that the Boards assets are commensurate with the standard of protection that is sought.

Current maintenance standards of the South Holland IDB and the Environment Agency are generally good.

4.2 Sources of Flooding

The potential sources of flooding that have been identified during this assessment are:

- local blockages to the South Holland Internal Drainage Board main drain system;
- an event in the local drainage network greater that exceeds the standard of protection;
- failure of Little Holland Pumping Station;
- overtopping and/or breaching of the Coronation Channel defences; and
- overtopping and/or breaching of the River Welland tidal defences.

4.3 Probability of Flooding

The probability of flooding associated with blockages in the South Holland IDB drainage system is low due to the maintenance standards achieved and managed by the IDB.

The standard of drainage provided by South Holland IDB is assessed at 2% annual probability (1 in 50 chance each year), compatible with the Department of the Environment, Food and Rural Affairs (DEFRA) target level of service for rural drainage and flood defence works. The risk associated with flooding due to events greater than 2% annual probability (1 in 50 chance each year) is lowered due to the South Holland IDB high priority watercourses incorporating a freeboard. This provides storage during events greater than 2% annual probability (1 in 50 chance each year).

The Coronation Channel earth embankment has a minimum crest level of +6.0m OD. The 1% annual probability (1 in 100 chance each year) peak flood level inclusive of climate change during the next 100 years in the River Welland is +5.45m OD. The Coronation Channel embankment provides a standard of protection of 1% annual probability (1 in 100 chance each year) with a minimum 0.55m freeboard.

The River Welland tidal defences provide protection during a 0.5% annual probability (1 in 200 chance each year) event.

4.4 Historic Flooding

During the preparation of this assessment, no evidence was discovered of the site being flooded.

4.5 Climate Change

Climate change is likely to impact the site through increased rainfall intensity and duration affecting the local drainage network and increased tide levels.

The South East Lincolnshire SFRA includes maps demonstrating the impact of climate change in 2116. The Residual Peak Depth maps within the SFRA indicate the maximum flood depths associated with a breach and overtopping of defences. These show that when the climate change allowances are applied to the combination of a 1% annual probability (1 in 100 chance each year) fluvial event and a 0.5% annual probability (1 in 200 chance each year) tidal event the site is not at risk of flooding. An extract from this map is shown in Figure 3 below.

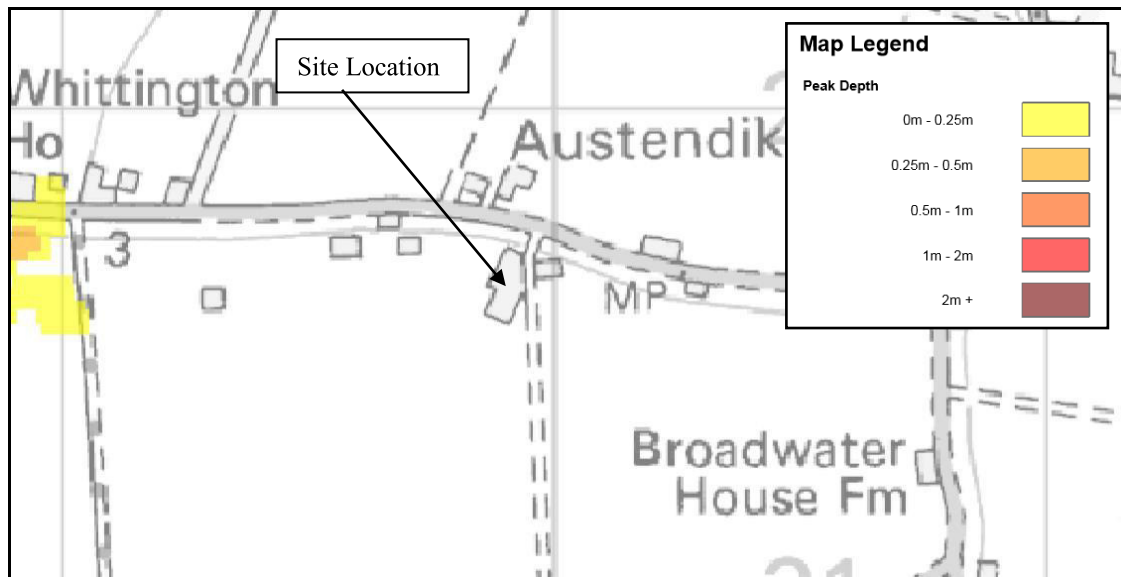


Figure 3 – SFRA 2116 Residual Peak Depth Map

5.0 FLOOD RISK MITIGATION AND RESIDUAL RISKS

5.1 Summary of Risks

The probability of this development flooding from localised drainage systems is low. Failure of Little Holland Pumping Station could occur due to mechanical breakdown or power supply being disrupted.

The probability of the site flooding from any Environment Agency system is less than 1% annual probability (1 in 100 chance each year) because of the standards of the existing flood defences. During the design life of the development the residual peak depth maps show that the site is not at risk.

Over time there will be a gradual increase in risk to the site due to climate change.

If during extreme events, levels of floodwater rose to such an extent that the site was affected, the situation would not be sudden.

5.2 Mitigation Measures

Based upon the information available during the preparation of this flood risk assessment no additional flood risk mitigation is required for the change in use.

Should there be a failure of Little Holland Pumping Station and conditions were such to put properties and land at risk of flooding, the Internal Drainage Board would take emergency action to maintain the drainage level of service by utilising temporary pumping equipment.

The developer should ensure that the occupiers of the buildings are sufficiently aware of the risk of flooding, and the standard of the existing defences. The Environment Agency provides a Flood Warning Service which includes Flood Warning Codes and uses direct warning methods where the risks and impacts of flooding are high.

In addition to direct and indirect flood warnings, the Environment Agency operates a 24 hour a day Floodline Service providing advice and information on flooding. The occupiers of the buildings should register with the Floodline Direct Warnings Service to receive any future flood warnings.

5.3 Residual Risks

The residual risk at the site from extreme events is low because of its location within the South Holland IDB district and the protection provided by the defences to the Coronation Channel and River Welland.

During an extreme event it is anticipated that sufficient time would be available to take precautionary actions to limit the potential impact of flooding. Safe access and

egress, in the case of evacuation being required, would be in a northerly direction to Moulton which is in Flood Zone 1.

6.0 CONCLUSIONS AND RECOMMENDATIONS

As a result of the assessment, the following conclusions have been reached.

- The development is in a defended floodplain. It is in the floodplain of the River Welland and Coronation Channel and protected during the 1% annual probability (1 in 100 chance each year) fluvial event. During the design life of the development, including an allowance for climate change, the site is not at risk of flooding.
- The site is located within an Internal Drainage Board catchment with a minimum standard of drainage of 2% annual probability (1 in 50 chance each year) which accords with DEFRA guidelines for rural development. The risk of flooding is lowered further due to the South Holland IDB high priority watercourses incorporating a significant freeboard. This provides storage during events greater than 2% annual probability (1 in 50 chance each year).
- Based upon the information available during the preparation of this flood risk assessment no additional flood risk mitigation is required for the change in use.
- The development passes the Sequential Test and is therefore suitable.


ATTACHMENT 1

LOCATION PLAN

(Dwg 349SK01)

EXISTING SITE PLAN

(Dwg 349SK02)



SITE AREA 14,800M²
APPROX UNIT GFA
1- 359M²
2- 345M²
3- 218M²
4- 399M²
5- 292M²
6- 380M²
7- 319M²
8- 218M²
9- 931M²
10- 218M²
11- 218M²
12- 218M²

Crown Copyright and database rights 2019. OS 100031961 National Map Centre. Purchased 11/07/2019 1 year licence.

Rev	Date	Detail
B	15/07/19	APPROX AREAS ADDED
A	30/07/19	NUMBERS ADDED



**i-UP
DESIGN LTD**
INTERIOR DESIGN | ARCHITECTURE | PROJECT MANAGEMENT
28-29 Newmill Road, Peterborough PE2 7JE
Tel: 01733 396181 info@i-ud.co.uk
www.i-ud.co.uk

Client: HOLT MYRES



Job Title:
POPULAR FARM
WESTON HILLS
SPALDING
PE12 8BZ

Scale: 1:1250 @ A3	Date: 15/07/19
Drawing Title	
SITE LOCATION PLAN	
Drawing No.	Revision
349SK01	B

ALL DRAWINGS ARE THE COPYRIGHT OF I-UD DESIGN



Metres

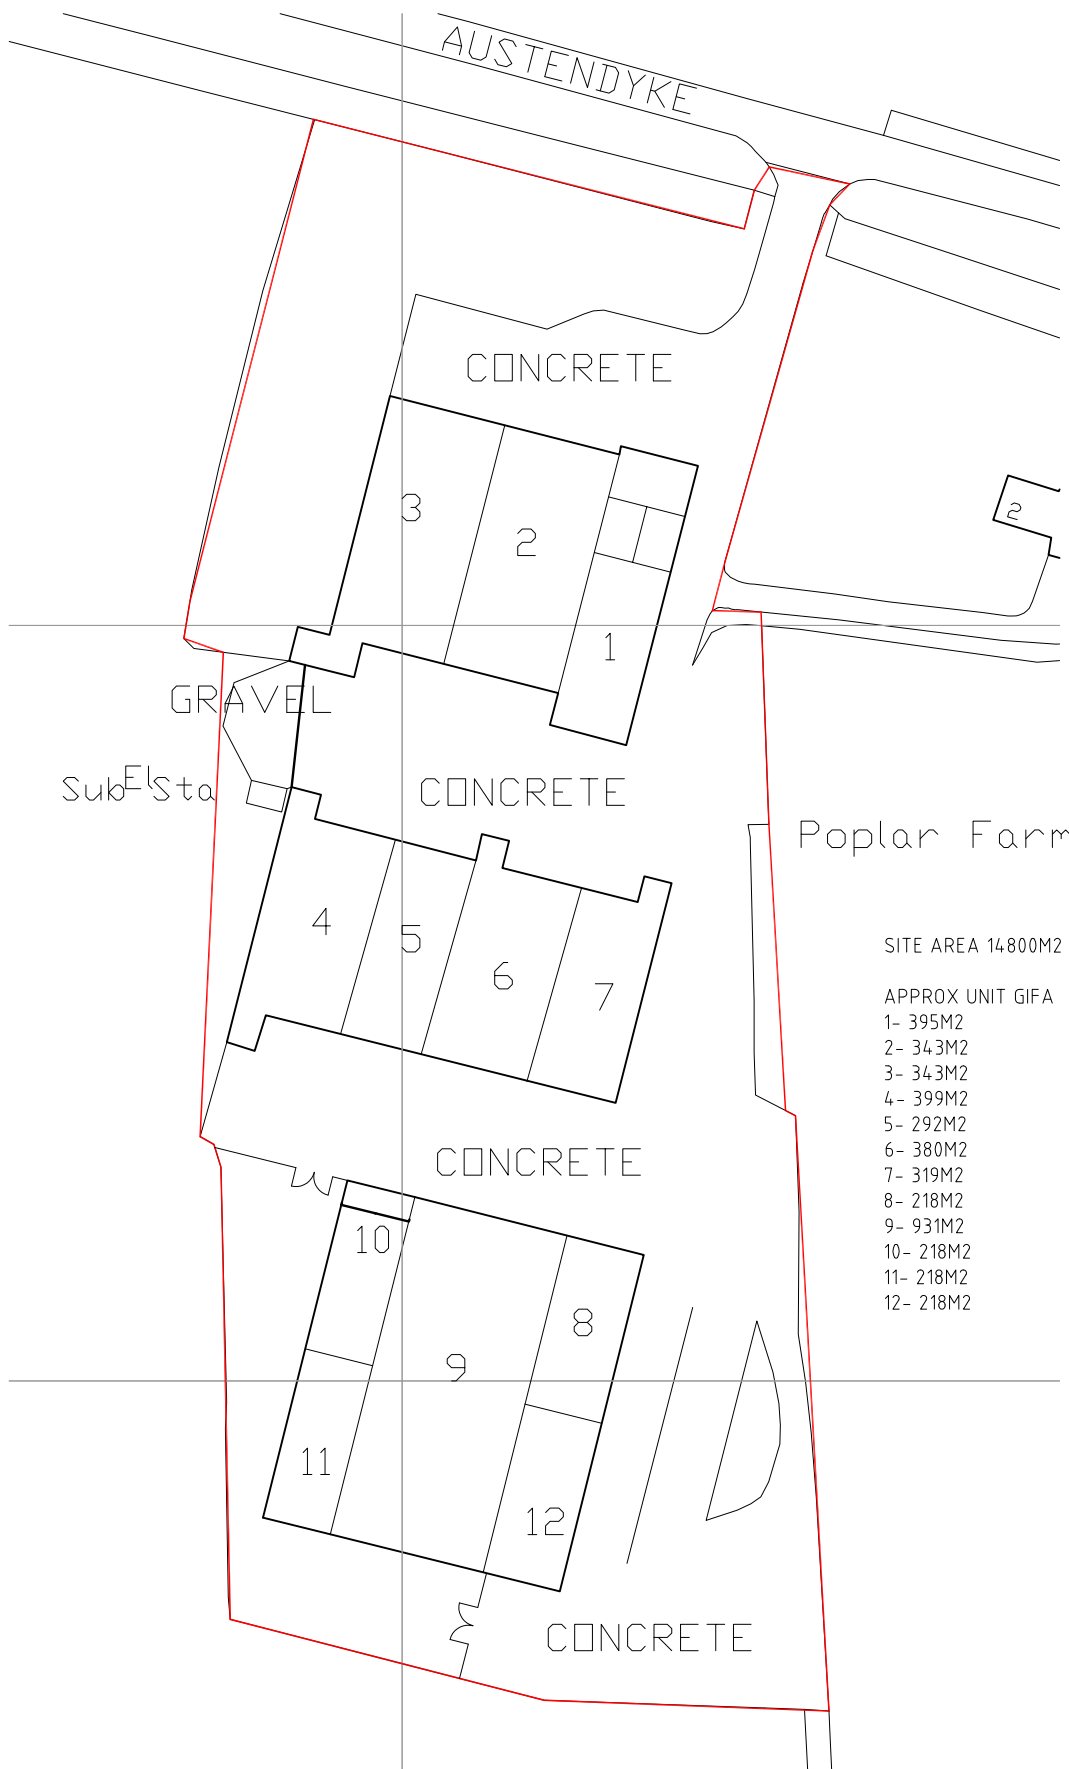

SITE AREA 14800M2

APPROX UNIT GIFA

- 1- 395M2
- 2- 343M2
- 3- 343M2
- 4- 399M2
- 5- 292M2
- 6- 380M2
- 7- 319M2
- 8- 218M2
- 9- 931M2
- 10- 218M2
- 11- 218M2
- 12- 218M2

Rev	Date	Detail
1	15/07/19	APPROX AREAS ADDED
2	15/07/19	REVISIONS ADDED
HOLT MYRES DESIGN LTD 25-29 Maxwell Road, Peterborough PE2 7JE Tel: 01733 390181 Email: info@hmt.co.uk www.hmt.co.uk		
Client: HOLT MYRES Job Title: POPULAR FARM, AUSTENDYKE RD, WESTON HILLS, SPALDING, PE12 6BZ Scale: 1:500 @ A2 Date: 15/07/19 Drawn by: TBH EXISTING SITE PLAN Drawing No: 349SK02 Revision: B All dimensions are the copyright of S&B 2018/8		