


Contractor to check all Dimensions on site prior to ordering materials / commencing work.Do Not Scale from this Drawing - If in doubt then please ask


PROTECTION OF EXISTING TREES

- In order to avoid damage to existing trees, the following precautions should be taken during development operations:
- Before construction commences, trees should be fenced around the Root Protection Area or the extent of the canopy, whichever is greatest, to prevent the storage of materials, lighting of fires or excavations, erection of site accommodation, deposition of waste due to tipping or leakage, ground compaction by traffic or any other actions likely to affect the health of the tree.
 - The fence should be a min of 1.2m tall and should be in place prior to any work commencing. The fencing should be clearly signposted indicating that it should not be removed.
 - The fence should be properly maintained during construction to provide adequate protection.
 - The fencing should be inspected frequently during works to ensure that trees are not being damaged.

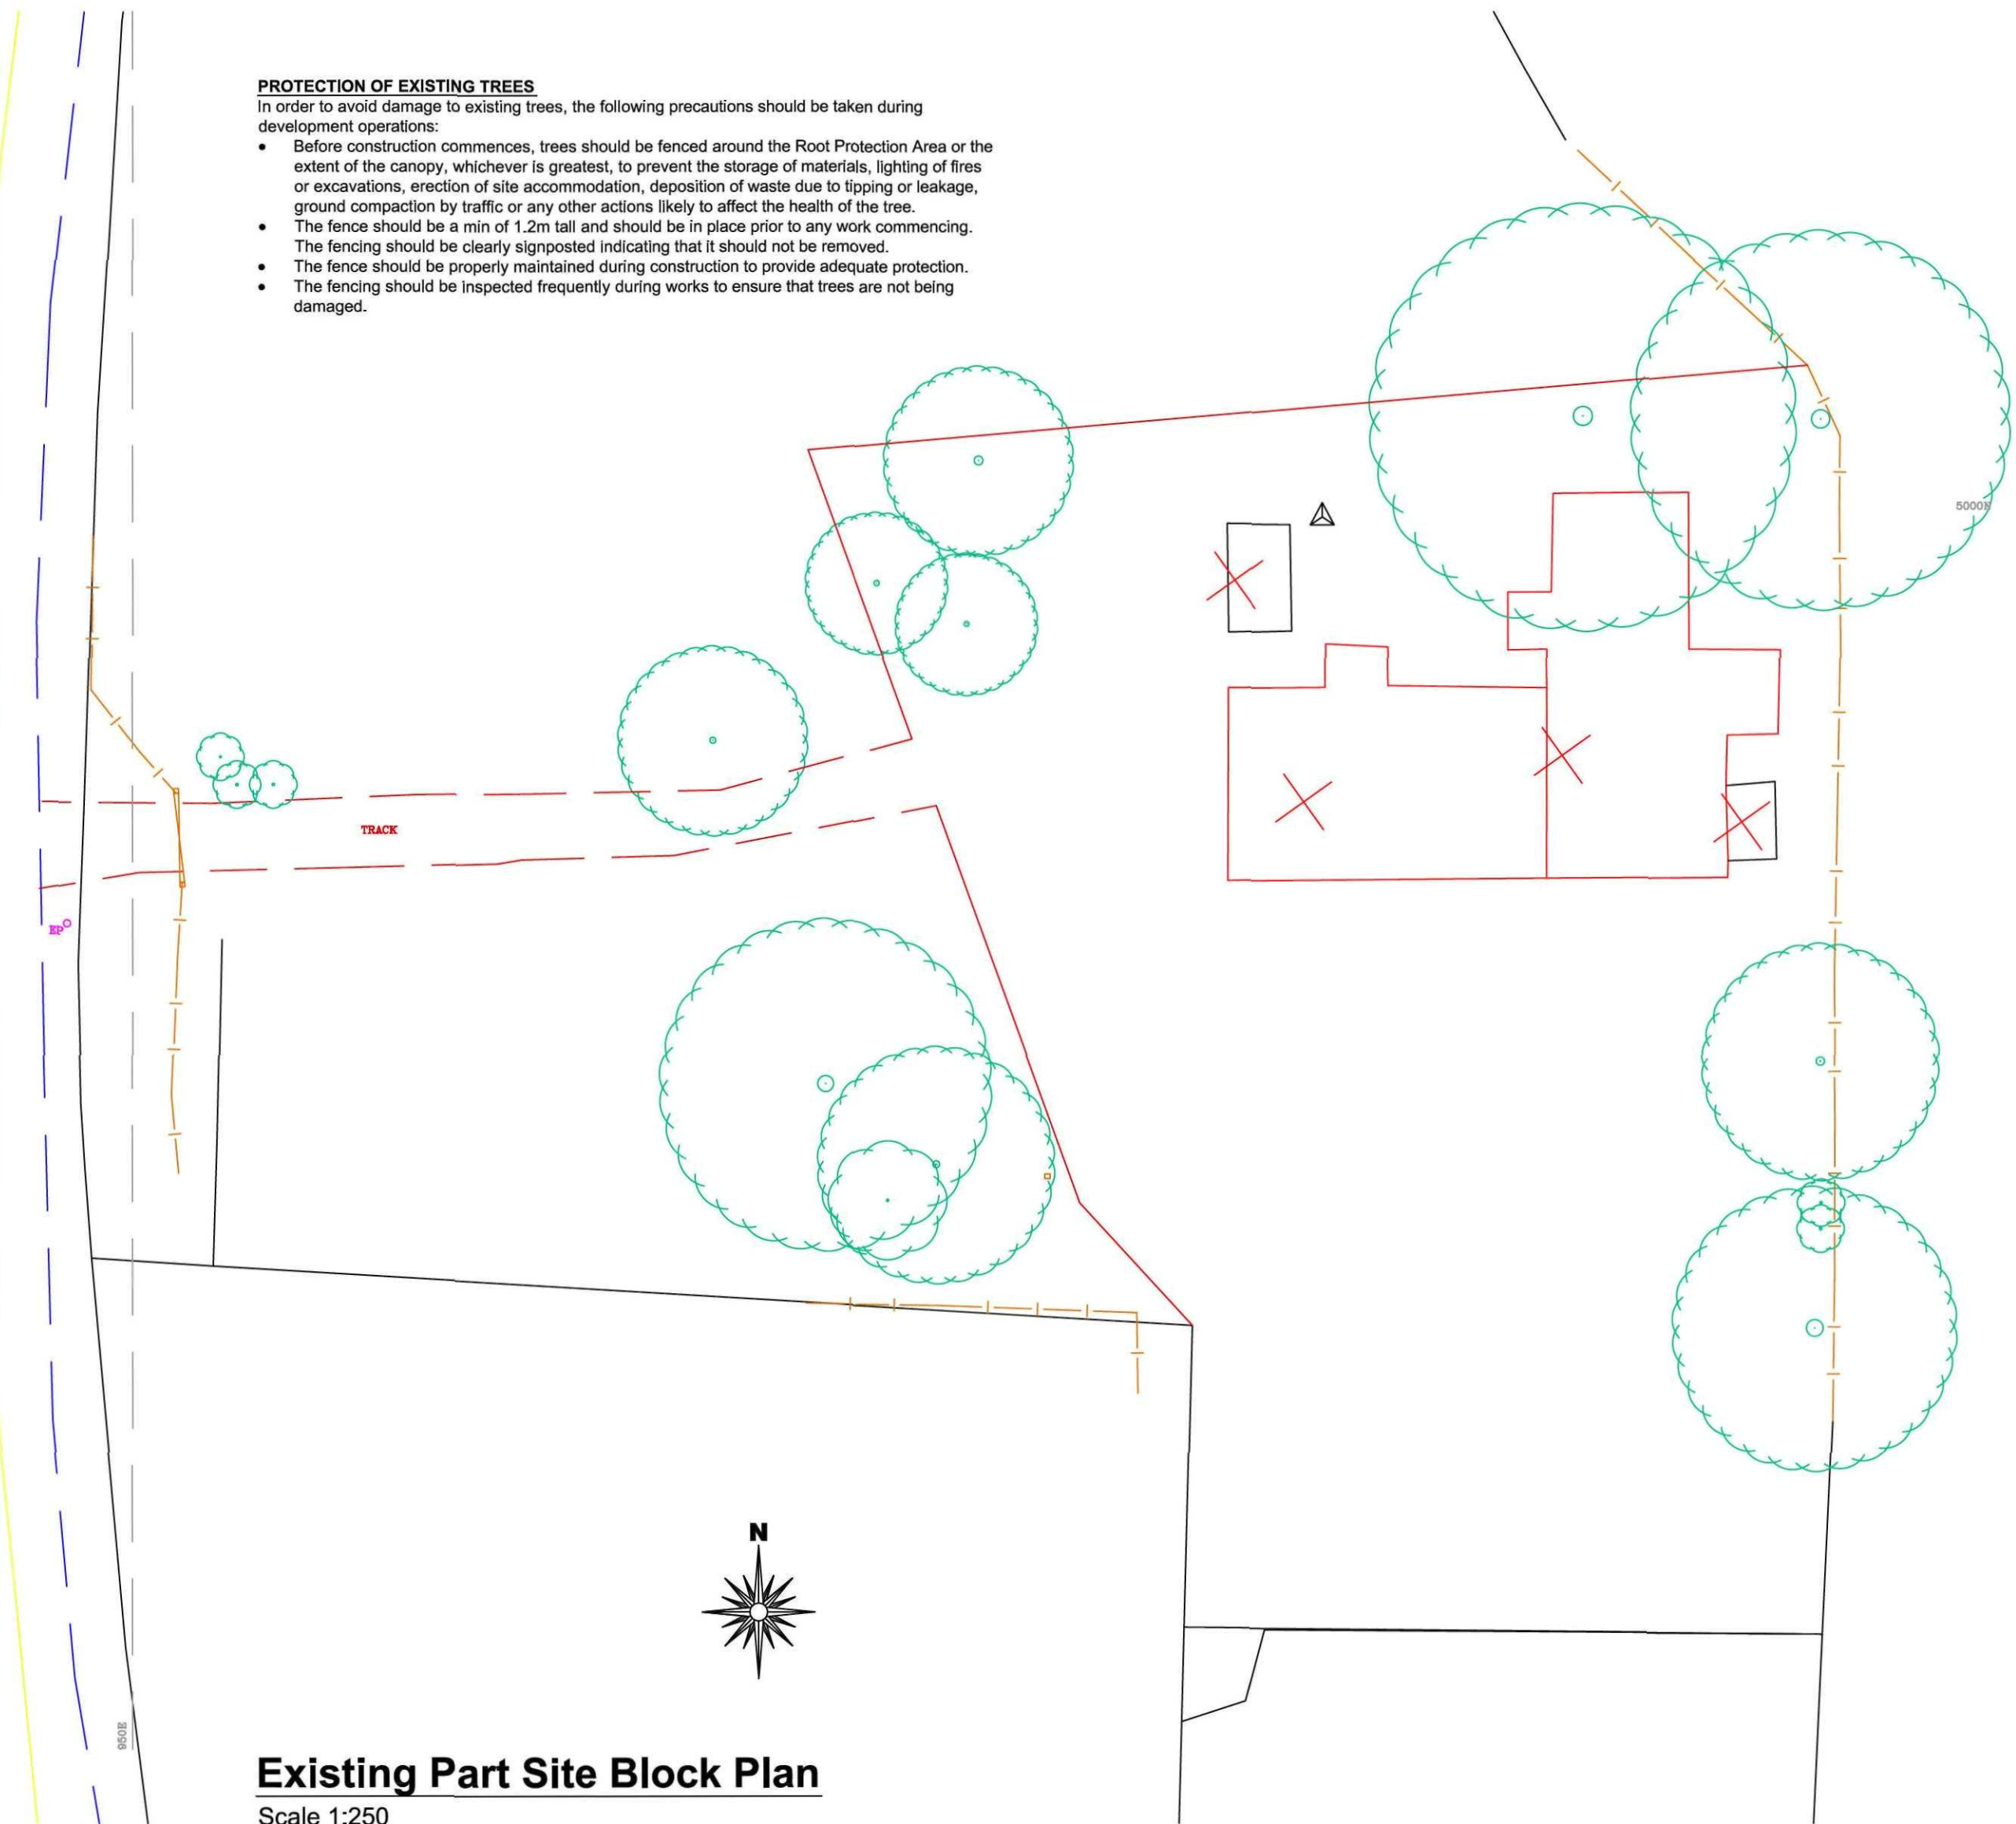

Existing Part Site Block Plan

Scale 1:250

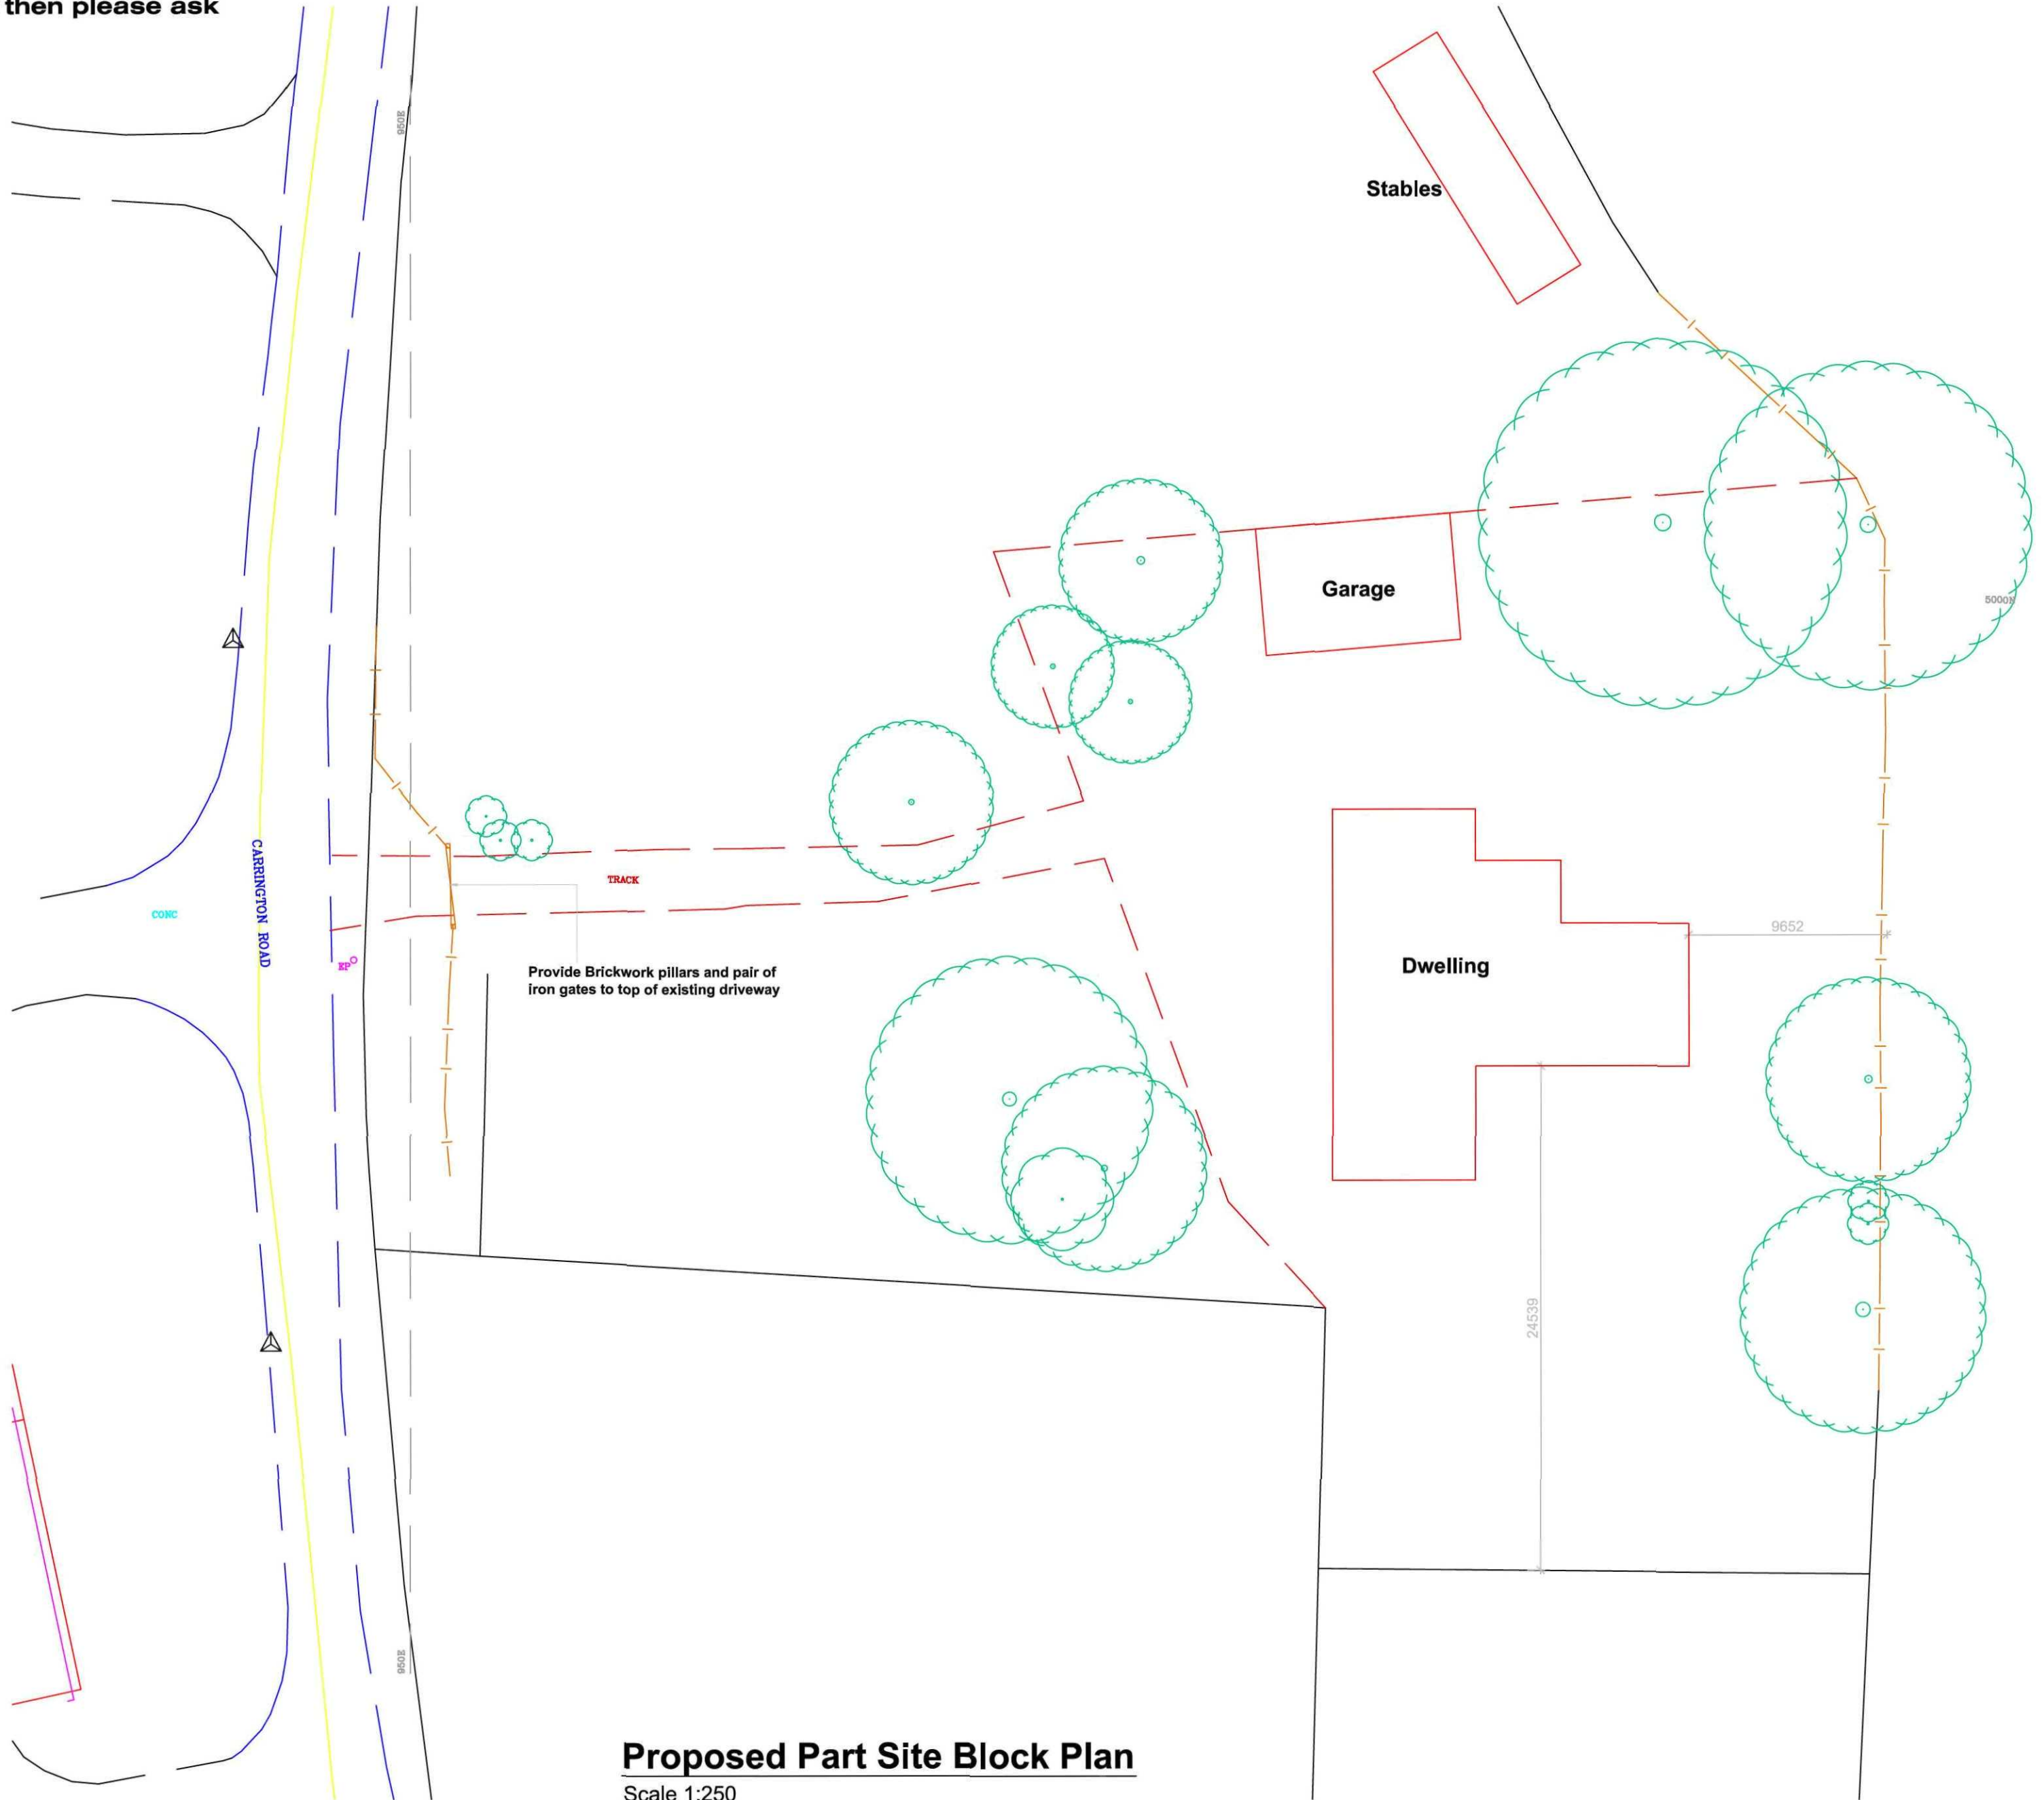

Proposed Part Site Block Plan

Scale 1:250



Site Location Plan

Scale 1:1250

Client :

Mr & Mrs N Allen
Kinder Lodge
Church Lane
Newton
PE13 5HF

Site :

Replacement Dwelling:
Old Crown Farm
Carrington Road
Moulton Seas End

Drawing:

**Site Location and
Block Plan**



2 Red Lion Street
Spalding
PE11 1SX
Tel / Fax: 01775 768 921
Mobile : 07815 112 058
e-mail: jason@remwaydesign.co.uk

Date : **oct07**

Scale : **As Noted**

Drawing No:

2040 - 01