
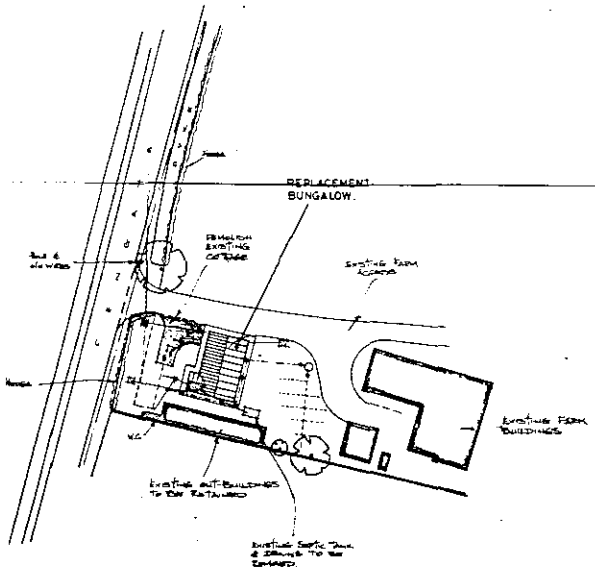


SITE LAYOUT.
SCALE: 1/500.

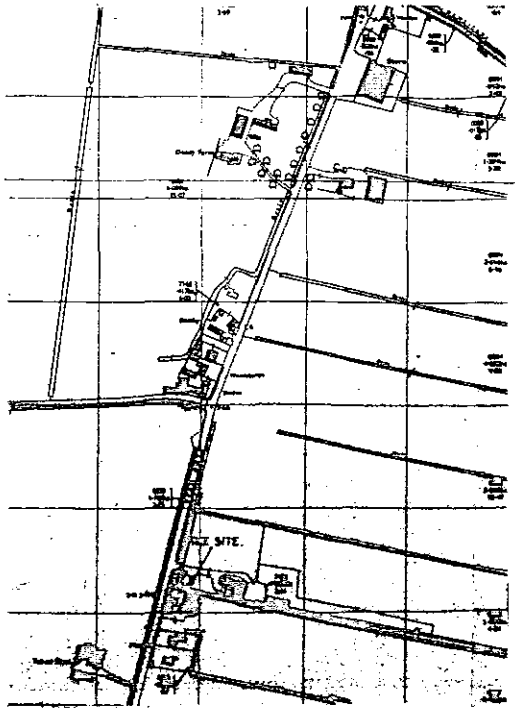

LOCATION PLAN.
SCALE: 1/2500.

SEPTIC TANK.
Connect foul water drains to 600 gallon capacity 'Klargester' type septic tank constructed in accord. with L.A. requirements. The sub-irrigational drainage system to the septic tank is to be determined by percolation test in accord. with the provisions of clause 15.3.2. of BS:6297, 1983. The applicant is responsible for carrying out the tests and the minimum requirement is 25 metres of sub-irrigational drainage or such length as may be determined by the test, whichever is the greater.

DRAINS
100 ϕ uPVC drains surrounded in 150 mm gravel. Lintel over pipes at wall abutments. Laid to even falls 1 in 70. 450 ϕ uPVC inspection chambers. All above ground drainage to BS:5572. All underground drainage to BS:8301.

RAINWATER DISPOSAL.
PVC rainwater goods. 100 H.R. gutters 68 ϕ down pipes to 100 ϕ uPVC drains to 1m² brick rubble soakaways sited at least 5m from any buildings.

G. R. MERCHANT
LEng AMICE, FAWO.
ARCHITECTURAL, STRUCTURAL & LAND DRAINAGE CONSULTANT
TEL: HOLBEACH (0406) 370653.

PROJECT:
5 BEDROOM BUNGALOW & GARAGE.
MOULTON HARRAGE FARM.
FINGATE.
MOULTON CHAPEL.

CLIENT:
MOULTON HARRAGE EDUCATIONAL TRUSTEES
C/O MARLERS & CO.
28 HIGH ROAD.
BURNHAM.
LINCS.

SCALES:	DATE:
As Indicated	April 1991.
G.R. Merchant	DRAWING No.: M.H.E.F. 6/2.

REVISIONS: