
AUSTIN JOHN LTD



WINDOW DETAILS

Proposed Replacement Windows at Boyfield, 9 High Street, Moulton, PE12 6QB

Prepared for: Ms Lal


Prepared by: Austin John Ltd, Rualen, Mill Green Road, Pinchbeck, Spalding PE11 3PU

On Behalf of: South Holland District Council

By Lauren Austin, August 2026


AUSTIN JOHN LTD

OD50 - 52 = SLIM GLAZED CILL MEET RAIL 4.5mm

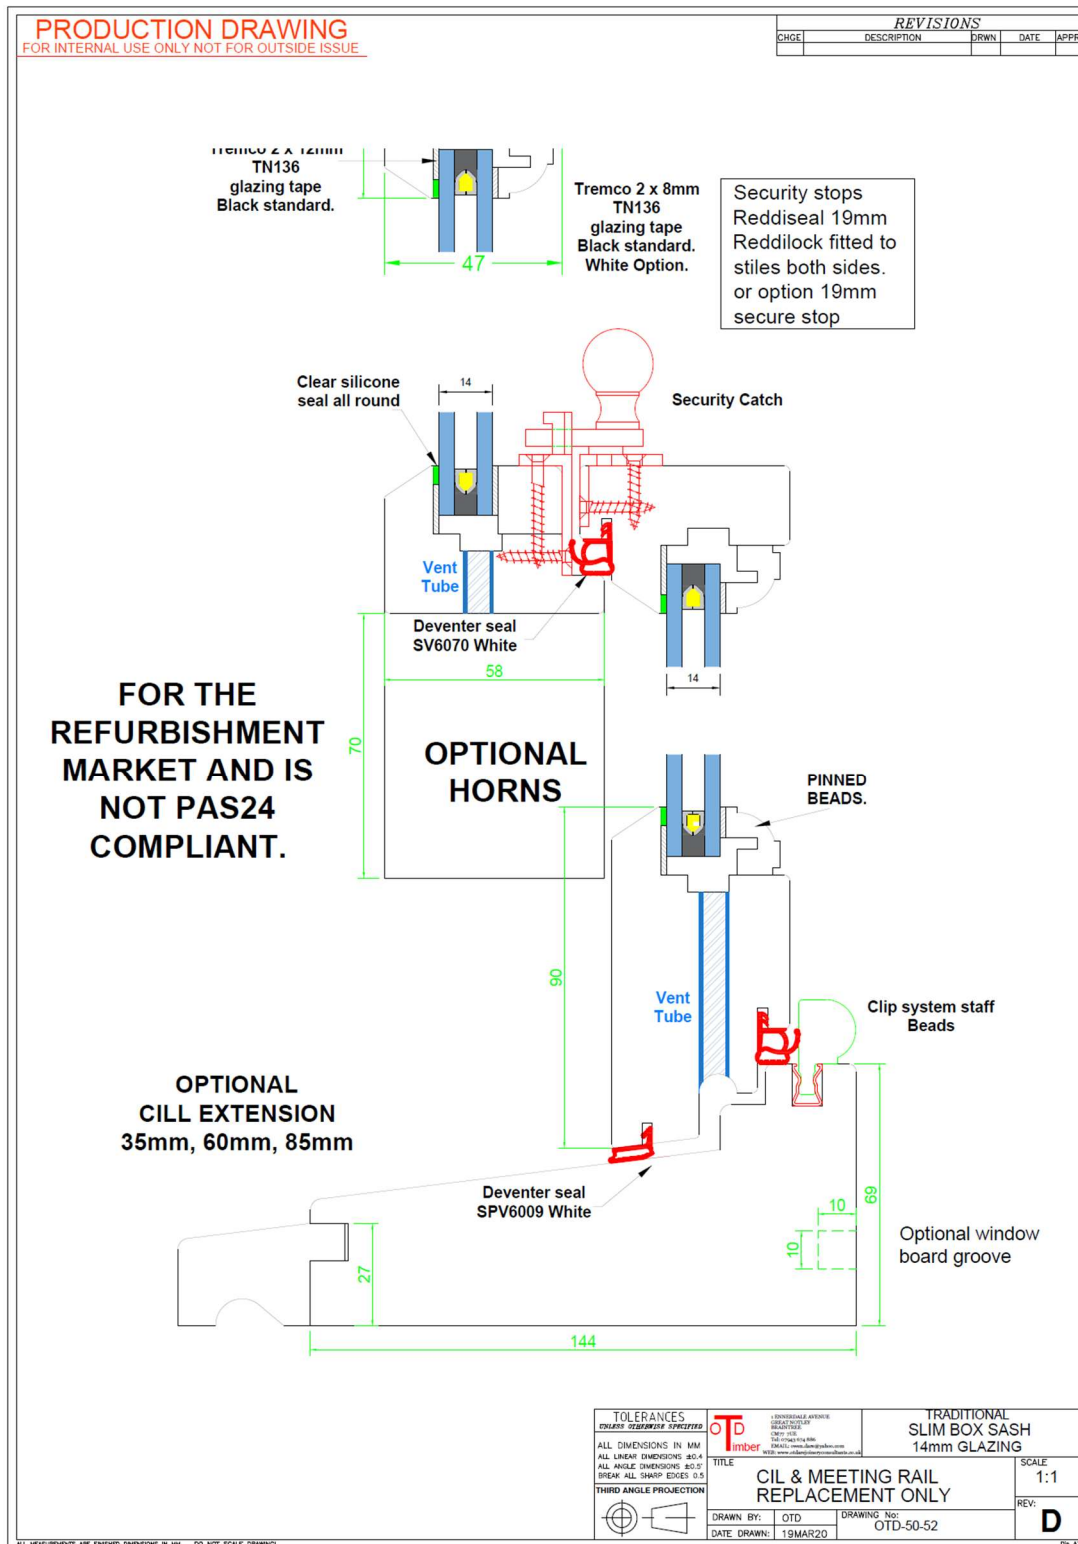


AUSTIN JOHN LTD

OD50 - 53 = SLIM GLAZED JAMBS

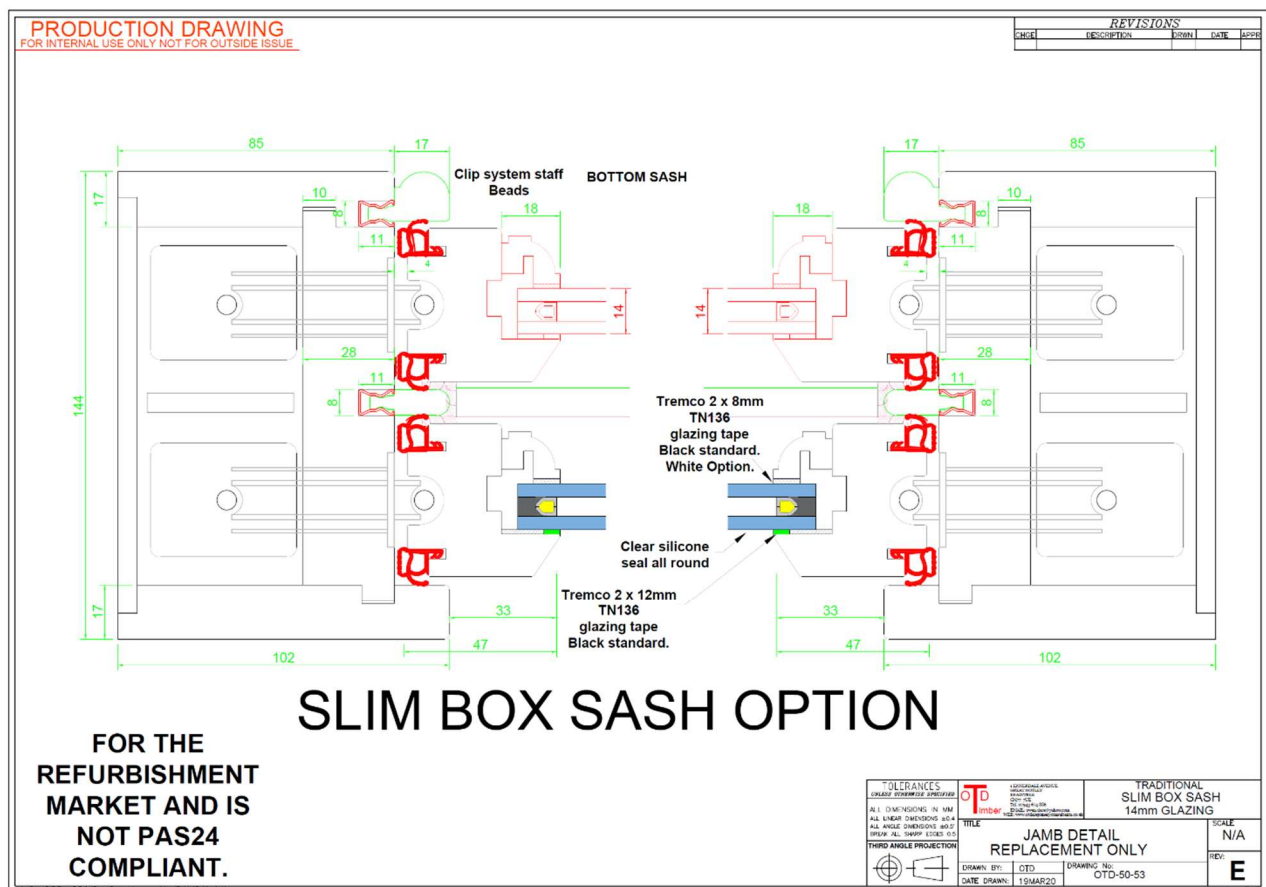

AUSTIN JOHN LTD

OD01-29 = TRICKLE VENT CONCEALED

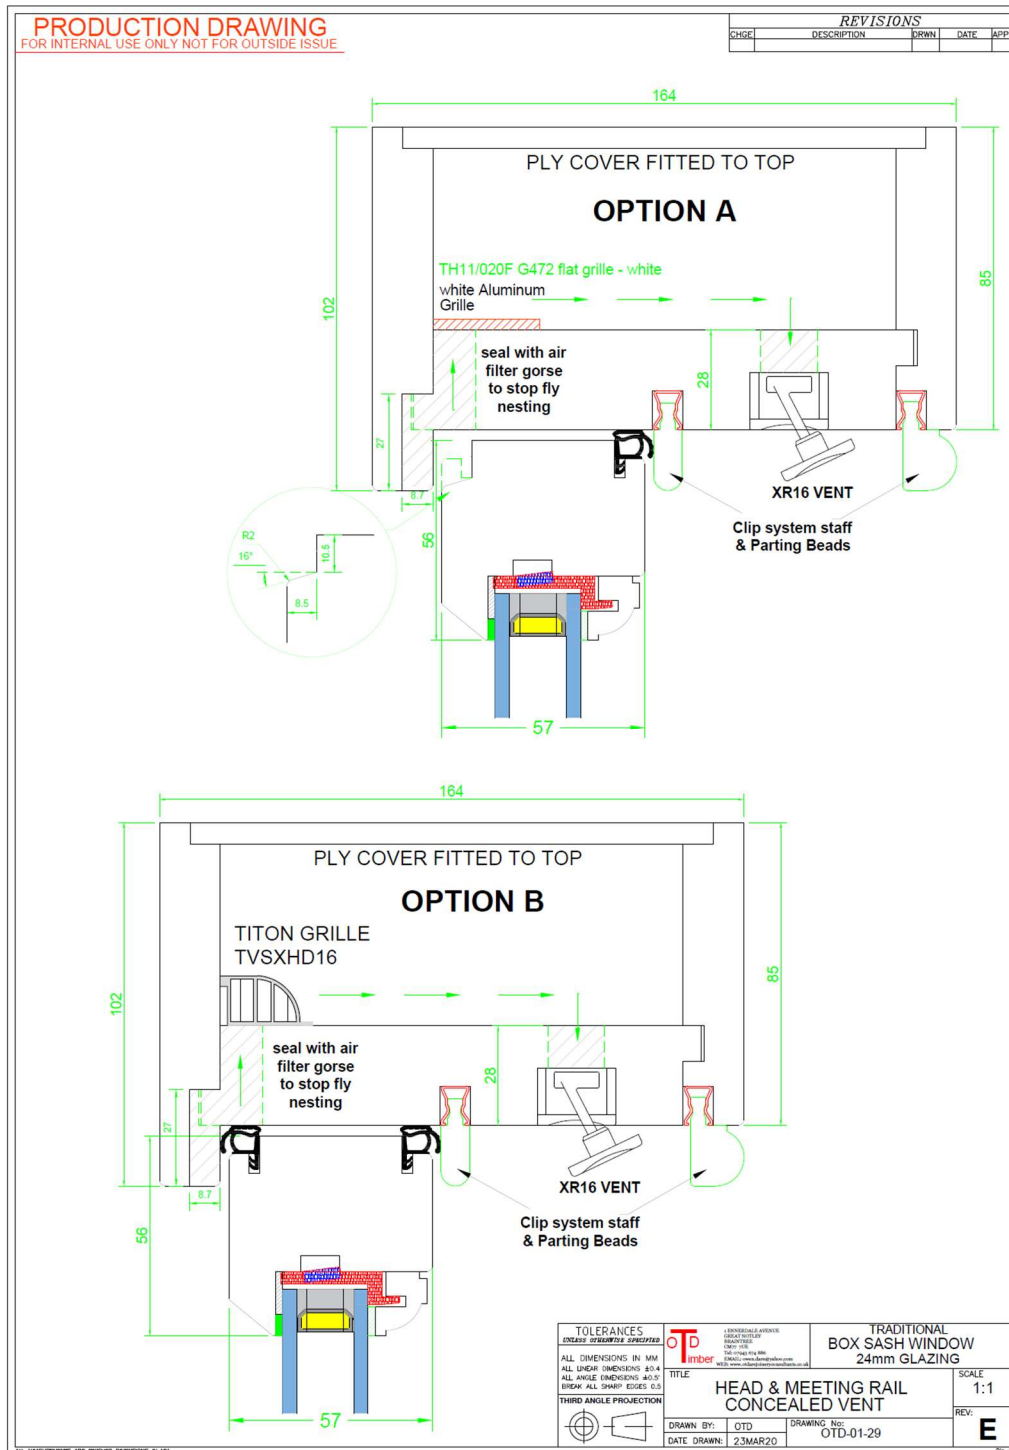

AUSTIN JOHN LTD

The general specification is as follows:

Timber	Sapele African Hardwood – Kiln dried – FAS Grade	https://www.lathamtimber.co.uk/contentfiles/files/Timber_Guide_Digital_Aug25_LoRes.pdf
Spray finished coating	Anker Stuy Hydrolux- A full three coat system with two layers of Hydrolux Filling Primer/ Iso Primer and a layer of Hydrolux	https://www.ankerstuishop.co.uk/products/copy-of-17-064x-hydrolux-topcoat-full?variant=47747558572366 https://cdn.shopify.com/s/files/1/0790/6911/8798/files/17-0648_Hydrolux_Topcoat_THIX_SM_459e9ba0-40a6-4a8e-9f03-1200d7c6f271.pdf?v=1721749072
Glazing	4mm Toughened Soft Coat 1.0 Min Delete / 6mm White Spacer / 4mm Toughened Clear, Argon Fill, Furniture Stamp HERITAGE SIGHT LINE ~8.5MM Toughened where required by BC Regs Unit spacing to be confirmed based on maximum manufacturing parameters Units to be internally beaded. Putty effect moulding to external face of sash. Bead to be moulded internally to match existing.	https://safe-guardglass.co.uk/clarity-classic/
Ironmongery	Casement fasteners – from the hardwick range. Design and finish to be confirmed.	https://hardwick.co.uk/collections/window-fasteners/products/lyndon-casement-window-nightvent-fastener
	Casement stay – from the hardwick range. Design and finish to be confirmed.	https://hardwick.co.uk/collections/window-casement-stays/products/10-lyndon-casement-stay
	Ball bearing hinges – eclipse Finish to be confirmed.	https://www.frisco.co.uk/our-products/grade-7-stainless-steel-ball-bearing-hinge/
	Pulley wheels - from the hardwick range. Finish to be confirmed. Nylon sash cord	https://hardwick.co.uk/collections/sash-pulleys/products/square-end-ball-bearing-sash-window-pulley
	Claw sash fastener - from the hardwick range. Finish to be confirmed.	https://hardwick.co.uk/products/locking-claw-sash-fastener?variant=47867885912375
	Sash Lifts - from the hardwick range. Finish to be confirmed.	https://hardwick.co.uk/collections/sash-handles-lifts-eyes-rings/products/sash-window-lift
Draught sealing	Sliding sash draught seal - Deventer SV5920 Sliding Sash Flipper Seal	https://www.marchesironmongery.co.uk/deventer-sv5920-sliding-sash-flipper-seal-96m-various-colours.html
	Casement sash seals - Schlegel - Aquamac 63 (Qlon QL 3005) Weatherseal	https://www.marchesironmongery.co.uk/aquamac-63-weatherseal.html
Parting bead and staff beads for sliding sashes	Exiwood staff and parting beads	https://www.marchesironmongery.co.uk/exiwood-solid-parting-bead-25mm-x-8mm-x-3m-white-pack-10.html https://www.marchesironmongery.co.uk/exiwood-solid-staff-bead-20mm-x-15mm-x-3m-white-pack-10.html