

PROPOSED DEVELOPMENT
AT CHURCH LANE, MOULTON, SPALDING, PE12 6NS
FLOOD RISK ASSESSMENT



View from northern boundary of the site

S M Hemmings B Sc C Eng MICE MIWEM,
69 Charlotte Way
Peterborough
PE39ER

This flood risk assessment has been prepared solely to support the planning application for a development at Church Lane, Moulton, Spalding. The author has made every effort to provide an accurate assessment of the flood risk but accepts no liability should the information be found to be incorrect or incomplete, or if it is used for any other purposes other than for which it was originally commissioned.

Introduction


A new residential development is proposed on east side of Church Lane, Moulton, Spalding, PE12 6NS. The site is at present part of a field opposite existing properties. The site is on the north side of the village of Moulton and is approximately 4 km from Spalding.

Most of the site is within Flood Zone 3 as shown on the Environment Agency's Flood Zone map.

The Planning Application requires a flood risk assessment to be carried out as specified in the Practice Guidance to the National Planning Policy Framework Development and Flood Risk. The site is within a defended area as specified on the South Holland District Council's Strategic Flood Risk Assessment (SHDC SFRA) map and is located in the South Holland Internal Drainage Board District.

Environment Agency (EA) Flood Zones

The map below is taken from the Environment agency website and shows the flood zones in this area.

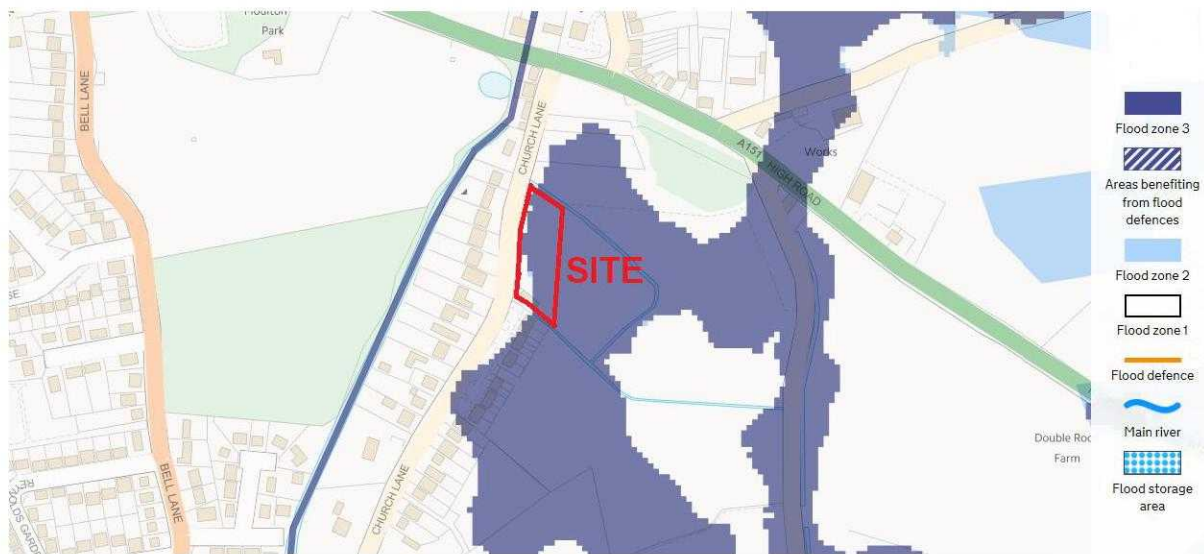

It can be seen that most of the site is in Flood Zone 3, although the properties on the west side of the road are within flood zone1.

Application Site

The National Grid Reference of the site is 531010 324590.

The position and extent of the site is shown on the plan at the end of this document.

As the site is within a defended area the proposed development can be considered to be within Flood Zone 3(a) as defined in Table 1 of the Technical Guidance.

Applying the flood risk vulnerability classification in Table 2 of the Guidance, a development consisting of dwelling houses is classified as “more vulnerable”.

Table 3 of the Guidance is shown on the next page:

<u>Flood Zones</u>	<u>Flood Risk Vulnerability Classification</u>				
	Essential infrastructure	Highly vulnerable	More vulnerable	Less vulnerable	Water compatible
Zone 1	✓	✓	✓	✓	✓
Zone 2	✓	Exception Test required	✓	✓	✓
Zone 3a †	Exception Test required †	X	Exception Test required	✓	✓
Zone 3b *	Exception Test required *	X	X	X	✓*

Therefore it can be seen that for “More Vulnerable” development the sequential and the exception tests need to be applied to the development.

Sequential Test

The aim of the Sequential Test, as set out in the Planning Practice Guidance, is to ensure that a sequential approach is followed to steer new development to areas with the lowest probability of flooding. The flood zones as defined in the Strategic Flood Risk Assessment for the area provide the basis for applying the Test. The aim is to steer new development to Flood Zone 1 (areas with a low probability of river or sea flooding). Where there are no reasonably available sites in Flood Zone 1, local planning authorities in their decision making should take into account the flood risk vulnerability of land uses and consider reasonably available sites in Flood Zone 2 (areas with a medium probability of river or sea flooding), applying the Exception Test if required. Only where there are no reasonably available sites in Flood Zones 1 or 2 should the suitability of sites in Flood Zone 3 (areas with a high probability of river or sea flooding) be considered, taking into account the flood risk vulnerability of land uses and applying the Exception Test if required.

As can be seen from the map on page 2 of this report Church Lane is categorised in flood zone 1 but the development site, which is only 100mm - 200mm below the road is categorised in flood zone 3. All of the area in flood zone 1 has been developed so any new development will need to be in flood zone 3.

The South Holland District Council Core Strategy states that there is a limited number of sites outside the town of Spalding available for residential development. The site of this development can be considered an ideal level site within an existing residential area. There is a requirement for further land to be brought forward and used for

residential development to enable the Council to meet the RSS and Structure Plan requirement for 2021.

Therefore I consider that the sequential test has been passed.

Exception Test

The Sequential Test has demonstrated that it is not possible, consistent with wider sustainability objectives, for the development to be located in zones with a lower probability of flooding. Therefore the Exception Test must be applied and for this to be passed:

- It must be demonstrated that the development provides wider sustainability benefits to the community that outweigh flood risks, informed by the Strategic Flood Risk Assessment; and
- A site-specific flood risk assessment must demonstrate that the development will be safe for its lifetime taking into account of the vulnerability of its users, without increasing flood risk elsewhere, and where possible will reduce flood risk overall.

Both parts of this test must be satisfied in order for the development to be considered appropriate in terms of flood risk. There must be robust evidence in support of every part of the test.

The first section will be demonstrated by the Supporting Planning Statement and compliance with South Holland District Council's planning policies.

This flood risk assessment will demonstrate that the development will be safe for its lifetime and it will not increase flood risk elsewhere.

Strategic Flood Risk Assessment

Consultants have produced a Strategic Flood Risk Assessment (SFRA) for the South Holland District Council (SHDC). This document provides details of the flood risk in the Council's area. Reference to the maps in this document give the following information for the flood risk and hazard at the site.

The maps illustrate the actual flood hazard for the 1% fluvial event and 0.5% tidal event, and for the 0.1% event.

For the present day	Depth of flooding ... zero
	Extent of flooding .. Low or medium flood probability
	Peak Velocity Nil
For year 2115	Depth of flooding ... zero
	Extent of flooding.... Low or medium flood probability
	Peak Velocity Nil

The maps showing the residual flood hazard were revised in the 2016 update of the South Holland District Council Strategic Flood Risk Assessment which can be found

on the website of the South East Lincolnshire Joint Planning Committee. The hazards are as follows for the 1% fluvial or 0.5% tidal event probability:

For the present day	Depth of flooding ...zero
	Extent of flooding .. Low or medium flood probability
	Hazard.....None
	Peak Velocity .. Nil
For the year 2115	Depth of flooding ... zero
	Extent of flooding .. Low or medium flood probability
	Hazard.....None
	Peak Velocity .. Nil

Figure 16 of the general maps show that the site is not within the rapid inundation zone for the present day and 2115.

Maximum flood level and bank levels in the River Welland

Tables in the SFRA show the following details of the defence bank on the east side of the tidal section of the River Welland north of the A16 road bridge and 4.5km west of the development site, between chainage 19.8km and 20.8km.

	2007	2055	2115
Peak 1 in 200 year extreme tide level	5.98m OD	6.31m OD	7.12m OD
Peak 1 in 1,000 year extreme tide level	6.27m OD	6.60m OD	7.41m OD

With an average defence crest level between 7.80 and 7.90 m OD the freeboards are as follows:

	2007	2055	2115
Peak 1 in 200 year freeboard	1870mm	1540mm	730mm
Peak 1 in 1,000 year freeboard	1580mm	1250mm	440mm

Tables in the SFRA show the following details for the defence bank on the east side of the Coronation Channel between chainage 0 km and 2.0 km.

	2007	2115
Peak 1 in 100 year flood level	4.32m OD	4.69m OD
Peak 1 in 1,000 year flood level	4.34m OD	4.69m OD

The bank levels on this section vary between 5.35m OD and 6.0m OD. Therefore it can be seen there is a minimum freeboard of 650mm to the predicted design maximum levels in 2115.

The Wash banks are at least 14.0 km north of the site. The tidal defences are earth banks with an average level of 7.80m OD. The maximum predicted 1 in 200 year tide level in 2115 in the SFRA is 7.11m OD.

Environment Agency Tidal Breach Hazard Mapping

The Environment Agency has published mapping which predicts the depths, velocities and hazard following a breach in the tidal defences for a 1 in 200 and 1 in 1000 year event in 2115. The maps have been produced by modelling breaches along the whole length of the tidal defences and combining these into one map.

The Environment Agency has confirmed that no flooding is predicted in a 1 in 1000 year event in 2115 to the development site following a breach or overtopping of the tidal defences.

Existing Flood Alleviation Measures

The site is within a defended flood plain, as defined in Appendix 1 of the Environment Agency's "Policy and Practice for the Protection of Flood Plains", which is considered to be passive until such time that a flood greater than the defences can withstand occurs. The likelihood of flooding occurring due to overtopping or failures of the defences is considered to be very low.

The site is located approximately 4.5 km south of the tidal section of the River Welland, which has a tidal defence bank which is maintained by the Environment Agency.

The site is located approximately 5.0 km from the west bank of the Coronation Channel which is maintained by the Environment Agency.

There is a watercourse maintained by South Holland IDB on the western side of Church Lane.

Existing Ground Levels

The level of the north end of Church Lane where it meets the A 151 is 4.30m OD and levels alongside the proposed development site are 3.30m OD on the north end and 3.15m OD on the southern end.

Ground levels on the site are approximately 3.10m OD, with the lowest levels of 3.00m OD near the northern boundary and some higher levels of 3.30m OD around the existing building on the southern end of the site. Levels in the field east of the site are similar to the site itself.

The road camber slopes towards the site. There is a shallow dyke on the northern boundary of the site.

A full topographical study has been carried out for this area and a simplified plan showing some of these levels is shown on page 13 of this report.

Potential Sources of Flooding

The potential sources of flooding to the site are:-

1. Failure or overtopping of tidal defences of the River Welland or the Wash
2. Failure or Overtopping of the Coronation Channel

3. High water levels in IDB drainage channels.
4. Localised flooding in the area.

1. Failure or overtopping of tidal defences of the River Welland or the Wash

As shown above, the east bank of the River Welland, which is approximately 4.5 km from the site, provides at a 1 in 200 year standard of protection in 2115. The latest information from the EA indicates that if there is a breach in the tidal defences no flooding would occur at the site in a 1 in 1000 year event in 2115.

2. Failure or Overtopping of the Coronation Channel

The SFRA states that the maximum design level in the Coronation Channel is 4.69m OD. The minimum crest level of the east bank of the Channel is 5.14m OD, which gives a minimum freeboard of 450mm. However, generally there is a freeboard of 600 mm along this bank of the Channel.

If the Channel were to breach water would flow eastwards towards the site. However, it would be retained for a short time by the A16 which is higher than the surrounding land. The SFRA indicates that with a serious breach water would not reach the site in a 1 in 100 year event.

With the site being 5.0 km from the Coronation Channel the risk from this source is so low it can almost be discounted.

3. High Water Levels in IDB drains

Although the whole of this area is below high tide level and levels in the rivers, the retained water levels in the drainage channels ensure that the risk of flooding is extremely low. South Holland IDB maintains a system of sluices, pumping stations, and drainage channels which convey surface water into the River Welland, the Wash and the River Nene to control water levels throughout the South Holland IDB area.

There is an IDB watercourse behind the existing houses on the western side of Church Lane. Dykes on the east side of Church Lane flow into this drain. The drain is shown below where it flows under Church Lane south of the site.



This drain is Moulton River and it continues to flow southwards alongside Hall Gate, Engine Gate and Daws Gate, where it discharges into the Little South Holland Drain. The level of the Little South Holland Drain is controlled by Little Holland Pumping Station which is 5.5 km east of Catherines Bridge and 8 km south east of the development site. The South Holland IDB have advised that the maximum 1 in 100 year predicted level at the pumping station is 0.30m OD. and the maximum 1 in 100 year level in IDB drainage channels near the site is not likely to exceed 2.00m OD.

Little Holland Pumping Station is operated and maintained in excellent condition by South Holland IDB and the likelihood of flooding due to this source is low. IDB systems are designed to provide a freeboard of between 600mm and 1000mm to all land in a 1 in 10 year return period rainfall event. South Holland IDB watercourses generally state that their watercourses provide a standard of 1 in 100 years with a freeboard of 300mm in urban areas. In an extreme event water levels will rise but this will be a slow process and it would be at least 24 hours before levels were high enough to begin to flood low land in the area, and after this the level of the flood water would need to rise another 1.0 metre before the development site would be affected.

The channels maintained by South Holland IDB in urban areas are classified as high priority watercourses and as such receive a higher maintenance priority.

There are possibilities of failure of outfall sluices, but these are mitigated by the high level of maintenance given to these structures by the IDB. If a failure did occur the IDB would immediately be warned of the problem by their telemetry system and take action to repair the fault or to bring in temporary pumps to reduce the risk of any flooding in the area. Similarly any failures of culverts or other blockages would be dealt with immediately.

Therefore the risk of flooding from IDB drainage channels can be considered to be extremely low.

4. Localised Flooding in the area

The roof water from the houses will be disposed of into soakaways. The hardstandings will be constructed of permeable block paving. As the houses will be constructed approximately 100mm above the level of Church Lane and at least 300mm above the existing field level this source of flooding will be adequately mitigated.

Extent of known Flooding

During the preparation of this assessment, no evidence was discovered of this area of land or any of the properties alongside Church Lane having been flooded in the past.

Probabilities and Trends of Flooding

The probability of this development flooding from Environment Agency main river is very low. In an extreme event any effect on this location would not be sudden and

there would be time for residents to take precautionary measures to limit the impact of any flooding that may occur.

Residual Risk – Extreme Events

The residual risk from extreme events is very low on this site. The major risk to the site is from a breach or overtopping of the tidal defences

The risk of this happening in this case is low and the hazard from any flooding is also low.


Climate Change

The recommendations for flood depths for this flood risk assessment use information mostly taken from the South Holland DC SFRA which was last updated in 2010. The EA have issued new guidance on recommended contingency allowances for predicted sea rises, fluvial flows and rainfall intensities which from 19th February 2016 needs to be considered in the FRA. The effects of these new recommendations are considered in Appendix A of this report (pages 13 to 16). It is concluded that no extra mitigation measures are necessary to comply with the new guidance on climate change.

Conclusions

The site is in flood zone 3, but land adjacent to the site with similar ground levels is within flood zone 1.

The plan (shown below) of predicted depths of flooding in the recently updated SFRA does not show any flooding in a 1 in 100 year fluvial or 1 in 200 year tidal event in 2115.

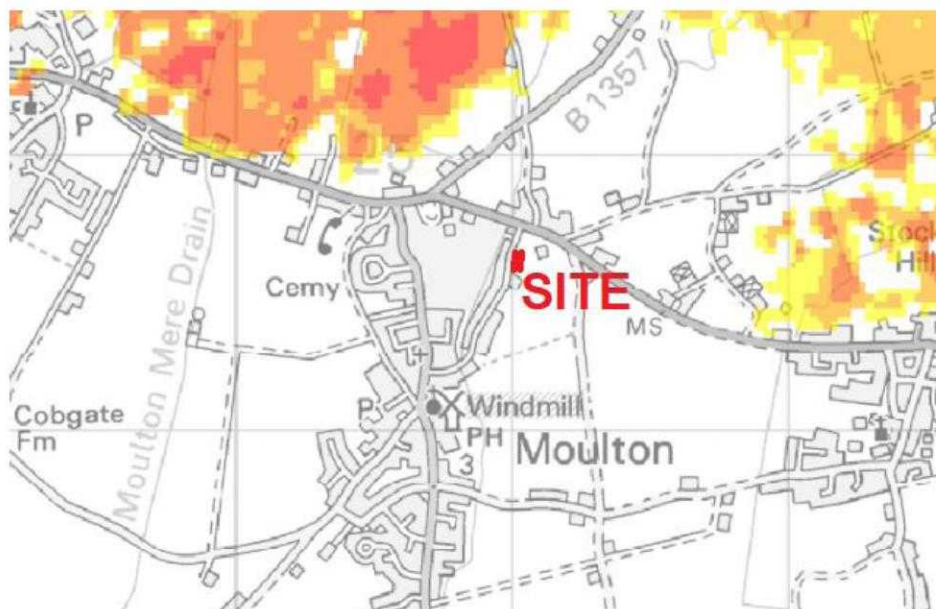

The Environment Agency have stated that no flooding is predicted on the site in a 1 in 1000 year event in 2115.

The Environment Agency have also stated that their policy is to continue to maintain tidal banks in the future with at least a 1 in 200 year standard of service.

The risk of flooding to the building from IDB drains can be considered low, and will be adequately mitigated by raising ground floor levels 300mm above ground level.

The IDB have adequate arrangements to bring in contractors and use their own staff if a failure of any part of the sluices occurred. If drains become full any flooding that would occur would happen very slowly and affect land at levels between 2.50m OD and 3.0m OD before the development site. It would be very unlikely to reach a level above 3.00m OD and flood the proposed development.

The proposed development is not in a functional flood plain as defined by PPS 25.

Recommendations

In any area at risk of flooding it is preferable that new dwellings should be of two story construction with all bedrooms at first floor level. This is to provide a refuge for residents if the buildings were to become flooded after a major breach of the tidal bank, and ensure there is no danger to residents when they are asleep.

The ground floor level of the proposed dwellings should be approximately 300mm above the average existing ground levels.

The developer should advise owners and occupiers of the properties to register with the Environment Agency's Floodline Warnings Direct Service.

Rainwater from the roofs of the buildings should be discharged into soakaways and these should be designed to BRE Digest 365 and approved under Building Regulations. Hardstandings around the buildings should be constructed with permeable paving.


It is recommended that the developer should consider forming a small swale on the east side of Church Lane in front of the proposed development to collect excess surface water from the road. This should be connected to the dyke on the northern boundary of the site.

S M HEMMINGS B Sc C Eng MICE MIWEM


stuart.hemmings@btinternet.com

25th October 2017


LOCATION PLAN

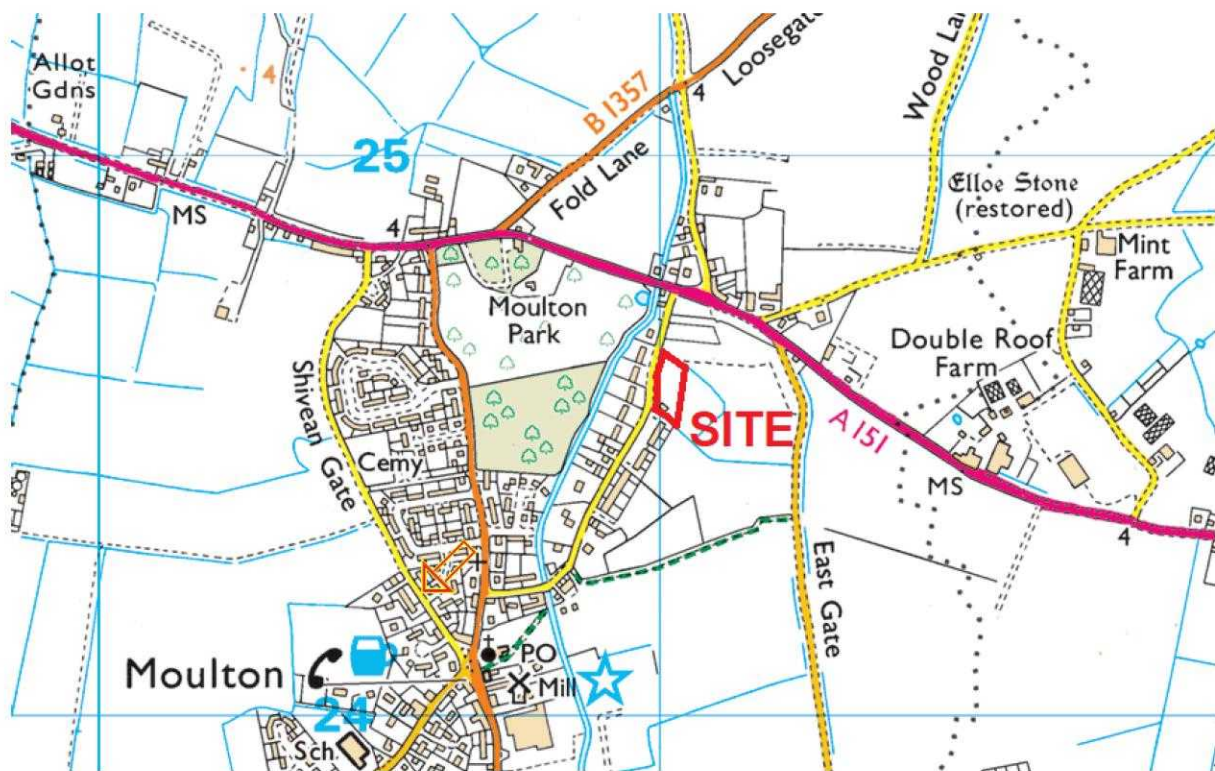

PLAN OF IDB DRAINS

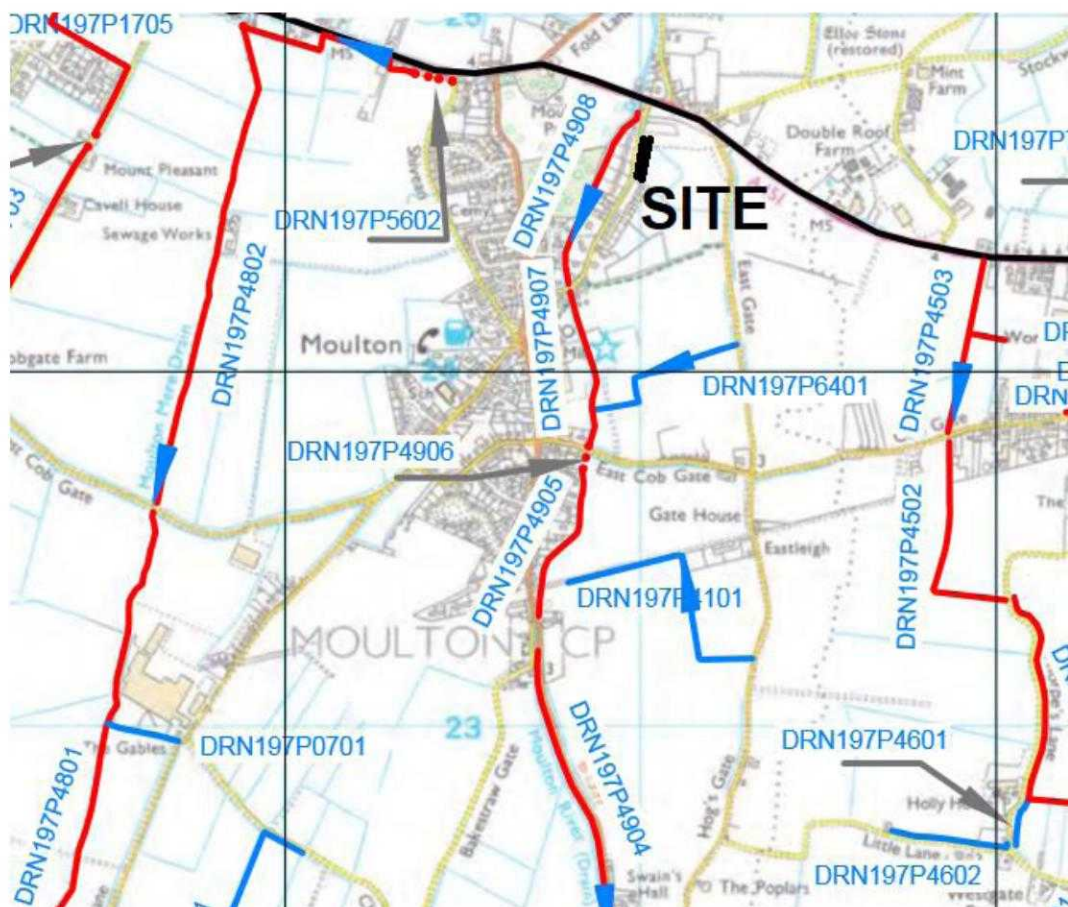

PLAN SHOWING SITE LEVELS

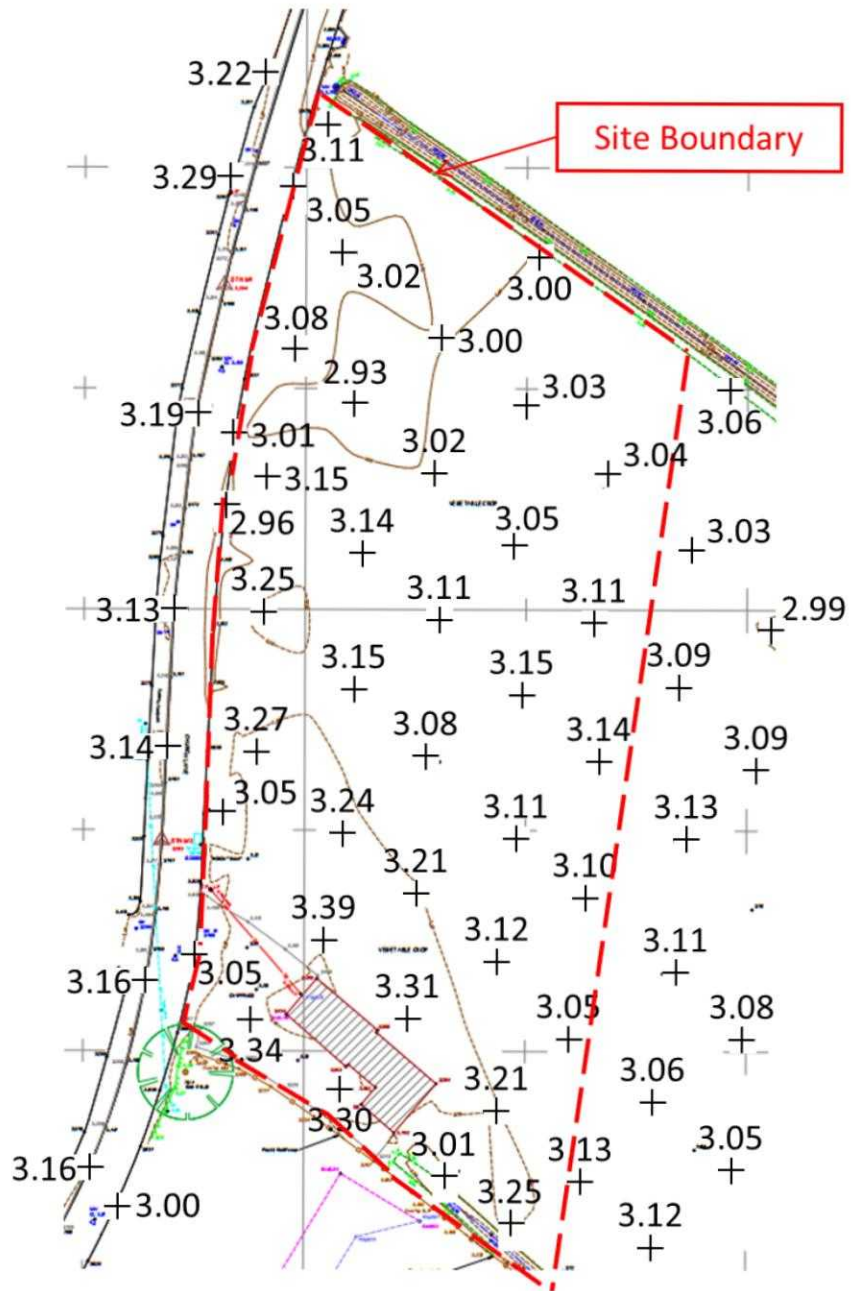

APPENDIX A CLIMATE CHANGE

The Environment Agency has issued revised guidance on climate change and have now stated that the new predictions should be considered and incorporated into all flood risk assessments produced after 19th February 2016.

Listed below are the climate change allowances in three documents:

- South Holland SFRA
- EA guidance (2013)
- Revised EA guidance

The recommendations in each document are shown below.

2010 South Holland DC SFRA

The SHDC SFRA states that the the following allowances have been made for climate change:

4.4 Climate Change

Scenarios for the years 2055 and 2115 include for climate change contingency allowances to the amount suggested by PPS25¹. These allowances are expressed in Table 2. Percentage increases are relative to the present-day.

Table 2 – Adopted Climate change contingency allowances

Parameter	Year 2055	Year 2115
Sea level rise (m)	+ 0.33	+ 1.14
Extreme wave height	+ 10%	+ 10%
Peak river flow and volume	+ 20%	+ 20%
Peak rainfall intensity	+ 20%	+30%

Where flows arise from pumping rather than natural run-off, notably in the Vernatt's Drain and for the Fenland subcatchments of the South Forty Foot Drain, peak flow rates for future eras have been taken as equal to current rates since this SFRA assumes all flood risk management measures will remain in their current state.

2013 Guidance to Planners

Guidance to planners was issued by EA in September 2013

Table 1: Recommended contingency allowances for net sea level rises (Net sea level rise (mm per year) relative to 1990)

	1990 to 2025	2025 to 2055	2055 to 2085	2085 to 2115
East of England, east midlands, London, south-east England (south of Flamborough Head)	4.0	8.5	12.0	15.0
South-west England	3.5	8.0	11.5	14.5
North-west England, north-east England (north of Flamborough Head)	2.5	7.0	10.0	13.0

Table 2: Recommended national precautionary sensitivity ranges for peak rainfall intensity, peak river flow, offshore wind speed and wave height

Parameter	1990 to 2025	2025 to 2055	2055 to 2085	2085 to 2115
Peak rainfall intensity	+5%	+10%	+20%	+30%
Peak river flow	+10%	+20%		
Offshore wind speed	+5%		+10%	
Extreme wave height	+5%		+10%	

Revised 2016 EA Guidance

Table 1 peak river flow allowances by river basin district (use 1961 to 1990 baseline)

River basin district	Allowance category	Total potential change anticipated for '2020s' (2015 to 39)	Total potential change anticipated for '2050s' (2040 to 2069)	Total potential change anticipated for '2080s' (2070 to 2115)
Anglian	Upper end	25%	35%	65%
	Higher central	15%	20%	35%
	Central	10%	15%	25%

For more vulnerable development in flood zone 3(a) the higher central and upper end should be used to assess the range of allowances.

Table 2 peak rainfall intensity allowance in small and urban catchments (use 1961 to 1990 baseline)

Applies across all of England	Total potential change anticipated for 2010 to 2039	Total potential change anticipated for 2040 to 2059	Total potential change anticipated for 2060 to 2115
Upper end	10%	20%	40%
Central	5%	10%	20%

Table 3 sea level allowance for each epoch in millimetres (mm) per year with cumulative sea level rise for each epoch in brackets (use 1990 baseline)

Area of England	1990 to 2025	2026 to 2050	2051 to 2080	2081 to 2115	Cumulative rise 1990 to 2115 / metres (m)
East, east midlands, London, south east	4 (140 mm)	8.5 (212.5 mm)	12 (360 mm)	15 (525 mm)	1.24 m

Table 4 offshore wind speed and extreme wave height allowance (use 1990 baseline)

Applies around all the English coast	1990 to 2050	2051 to 2115
Offshore wind speed allowance	+5%	+10%
Offshore wind speed sensitivity test	+10%	+10%
Extreme wave height allowance	+5%	+10%
Extreme wave height sensitivity test	+10%	+10%

Effects on Predictions of Flood Risk in FRA

1) Flooding from Tidal River Welland

The FRA has identified the main source of flooding where the new climate change recommendations could affect the predictions of flood levels in 2115 at the development site is flooding from the tidal River Welland.

The contingency allowance in metres for the years 2055 and 2115 using 1990 as a baseline in the SFRA compared with the guidelines is as follows

Year	SFRA	2013 guidance	Revised 2016 guidance
2055	0.33	0.395	0.412
2115	1.14	1.205	1.24

Therefore it can be seen that the revised guidance increases the maximum allowance for sea rise in 2115 by 100mm for the maps in the SFRA and 40mm for maps issued by the Environment Agency. The EA maps indicate that flood water from a breach in the tidal banks in a 1 in 1000 year event in 2115 will only reach the northern side of

the A151 road which is 350 metres north of the site. Therefore a small increase will not change this map significantly and cause any flooding on the site in this event.

2) Flooding from Coronation Channel and the IDB drainage system

As the development is in flood zone 3 and is classed as more vulnerable, the central climate change allowance, which is 35%, should firstly be considered. After considering the effects of this increase the higher central, which is 65%, should be considered to assess the effect of this.

The EA have been using an allowance of 20% for climate change over the past few years in their assessments and modelling of their systems. The SHDC SFRA also has used this figure of 20%. The increase to 35% and 65% will not significantly change the conclusion in the SFRA of what might happen if a breach occurred in the bank of the Coronation Channel. If there are additional flows along this part of the Coronation Channel and River Welland it will lead to the storage systems of the Cowbit and Crowland Washes operating and additional overtopping over lower banks rather than any significant increase in levels in the river.

IDB's have been using an allowance of 20% for climate change over the past few years in their assessments and modelling of their systems. Generally IDB's are happy that their systems provide a 1 in 100 year standard to most urban areas at the present time.

South Holland IDB, and all IDB's, are aware that climate change will affect the operations of pumping stations, sluices and drainage channels. Pumping stations and sluices only have a 30 year life and will need to be refurbished or rebuilt within this timespan. It is assumed that South Holland IDB will continue to review the modelling they have already carried out and when the Board consider these refurbishments adequate arrangements will be made to incorporate the latest climate change projections in order that the Board continues to provide the same standard of service as the present day.

Therefore it is considered that the mitigation proposed for the development, with the recommendation that the floor levels should be raised by approximately 300mm is satisfactory.