
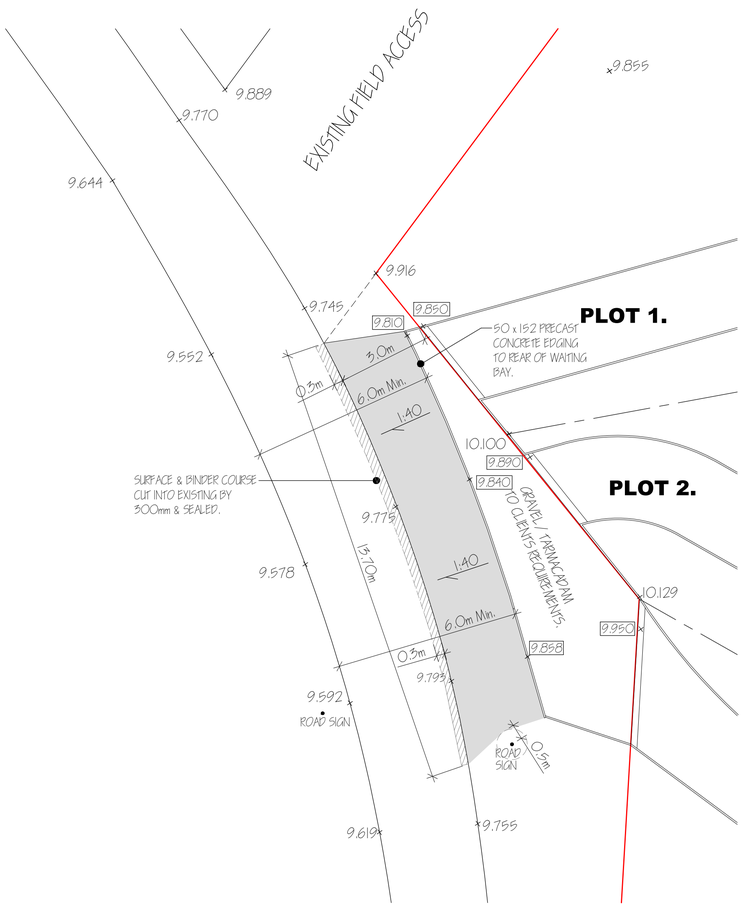
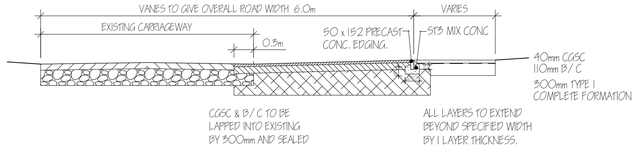


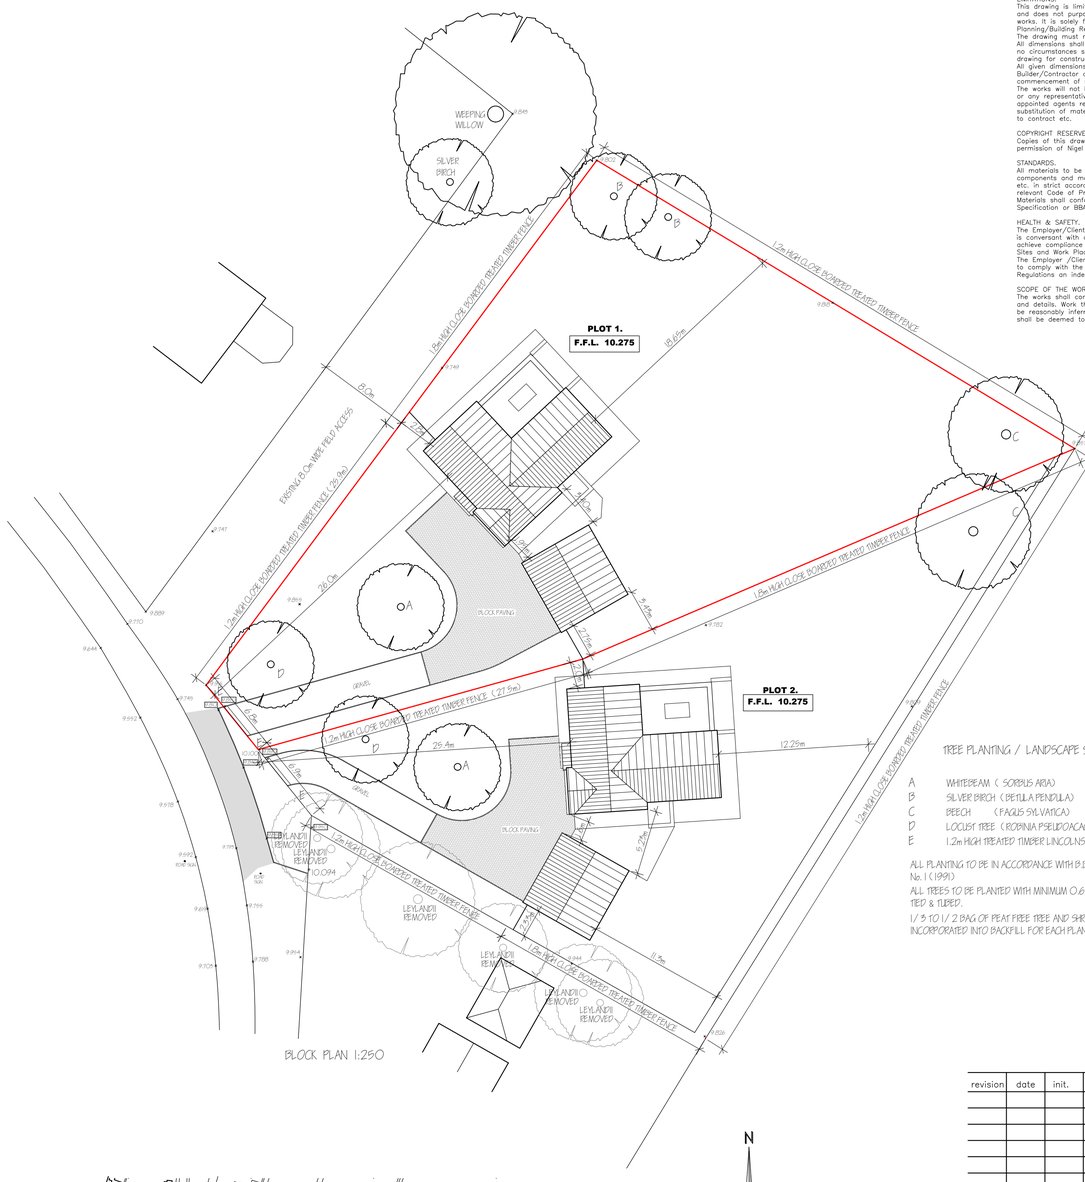

NOTES.

1. TREE STUMPS AND ROOTS WITHIN THE PROPOSED HIGHWAY SHALL BE REMOVED. HOLES LEFT BY DEMOLITION OF BUILDINGS, UPROOTED TREES ETC. SHALL BE FILLED IN ACCORDANCE WITH CLAUSE 6.1
2. ALL EXCAVATED MATERIALS TO BE REMOVED FROM SITE.
3. SURFACE COURSE SHALL BE 40mm OF 10mm NOMINAL SIZE CLOSE GRADED SURFACE COURSE (AC 10 CLOSE SURF. 70/100 OR 100/150) TO CLAUSE 9.5 COMPACTED IN ACCORDANCE WITH CLAUSE 7.2 TO A VOID CONTENT WITHIN RANGE 2-10%
4. BINDER COURSE MATERIAL SHALL BE 20mm NOMINAL SIZE RECIPE MIX DENSE BINDER COURSE (AC 20 DENSE BIT. 40/60 REC.) TO CLAUSE 9.1 LAID IN A SINGLE LAYER OR COMBINATION LAYERS NOT LESS THAN 90mm THICK NOR GREATER THAN 110mm THICK. COMPACTION SHALL BE IN ACCORDANCE WITH CLAUSE 7.2 TO A VOID BONDED TOGETHER.
5. SUB-BASE SHALL BE TYPE 1 TO CLAUSE 8.1. A MINIMUM IN-SITU CBR OF 30%. MINIMUM STIFFNESS OF 35MPA IS REQUIRED, DETERMINED BY PLATE BEARING TEST OR LIGHT WEIGHT DROP TEST RESPECTIVELY TO CLAUSE 8.2.
6. THE SURFACE AND BINDER COURSE SHALL BE LAPPED INTO THE EXISTING CONSTRUCTION BY 300mm AND SEALED.
7. THE REMAINING VERGE WIDTH SHALL BE GRADED BACK TO EXISTING WITH A MAXIMUM 1:2 SLOPE. ALL DISTURBED VERGES TO BE PREPARED AND GRASS SEEDED TO CLAUSE 6.3
8. ALL MATERIALS AND WORKMANSHIP TO BE IN ACCORDANCE WITH LINCOLNSHIRE COUNTY COUNCIL HIGHWAY AND FLOOD DEVELOPMENT AUTHORITY DEVELOPMENT ROAD SPECIFICATION AND CONSTRUCTION MARCH 2017 FORMATION
9. THESE TYPICAL DETAILS ARE FOR UNCLASSIFIED HIERARCHY CLASS 3 OR 4 CARRIAGEWAYS WITH LESS THAN 0.25 MSA TRAFFIC AND AN IN-SITU CBR OF 5%. THE HIGHWAYS OFFICER IS TO AGREE THESE FIGURES WITH THE DEVELOPER PRIOR TO ANY PERMIT BEING ISSUED AND THEREFORE THE AGREED CONSTRUCTION LAYER THICKNESS, BAY LENGTH AND WIDTH MAY BE VARIED TO SUIT THE LOCATION.


WEEPING WILLOW
SILVER BIRCH
1.2m HIGH CLOSE BOARDED TREATED TIMBER FENCE
PLOT 1.
F.F.L. 10.275
PLOT 2.
F.F.L. 10.275
1.8m HIGH CLOSE BOARDED TREATED TIMBER FENCE
EXISTING 6.0m WIDE FIELD ACCESS
1.8m HIGH CLOSE BOARDED TREATED TIMBER FENCE (27.5m)
1.8m HIGH CLOSE BOARDED TREATED TIMBER FENCE
1.2m HIGH CLOSE BOARDED TREATED TIMBER FENCE
1.8m HIGH CLOSE BOARDED TREATED TIMBER FENCE
15.07m
20.0m
20.0m
29.4m
12.29m
11.3m
27.15m
4.44m
BLOCK PAVING
GRAVEL
PLANTS REMOVED
LEYLANDII REMOVED
10.094
9.782
9.749
9.770
9.889
9.644
9.552
9.578
9.619
9.705
9.755
9.788
9.995
9.944
9.884
9.840
9.890
10.100
9.858
9.950
10.129
9.793
9.592
ROAD SIGN
ROAD SIGN
0.5m
1.2m
1.8m
1.8m
1.8