


REMOVE EXISTING TIMBER FENCING AND PUT ASIDE EXISTING METAL GATE FOR RE-USE
EXCAVATE FOR FOUNDATIONS 750 MM BELOW GROUND LEVEL (1·0 M IN CLAY)
AND PROVIDE 500 MM WIDE X MIN 225 MM CONCRETE STRIP FOUNDATIONS
CARE MUST BE TAKEN TO AVOID ANY SERVICES DURING EXCAVATION AND ENSURE FOOTINGS
BASE IS BELOW ANY EXISTING FOUL OR S.W. DRAINS INVERT. PROVIDE 50 MM GAP AROUND ANY PIPE
TO BE FILLED WITH COMPRESSIBLE MATERIAL AND LINTEL OVER.
SUB-STRUCTURE WALLING IN CLASS 'A' CONCRETE BLOCKWORK IN 1:3 CEMENT/SAND MORTAR
PROVIDE D.P.C. TO WALLS 150 MM ABOVE GROUND LEVEL
WALLING IN 225 MM THICKNESS RECLAIMED FACING BRICKWORK IN ENGLISH BOND (1:2:9 MORTAR)
(ALTERNATING COURSES OF HEADERS AND STRETCHERS) TO TERMINATE 1·8 M HIGH IN BWK ON EDGE
COPING ON 2 COURSE PLAIN TILE CREASING

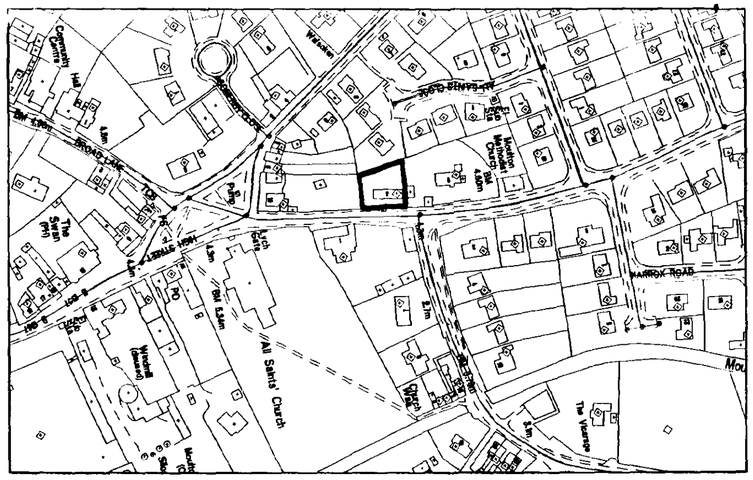


LOCATION PLAN 1:2500

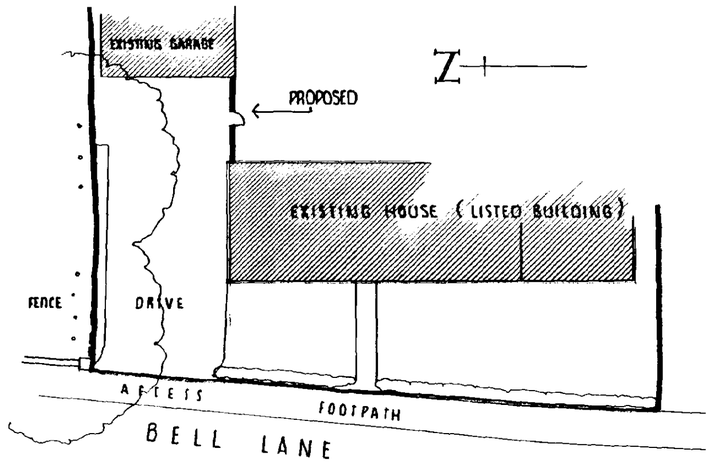

BLOCK PLAN 1:200

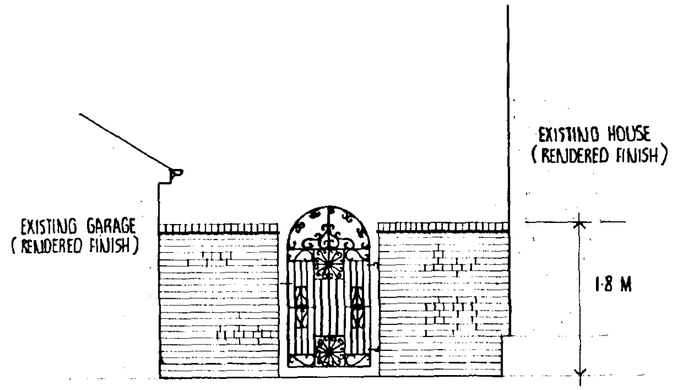

FRONT ELEVATION 1:50

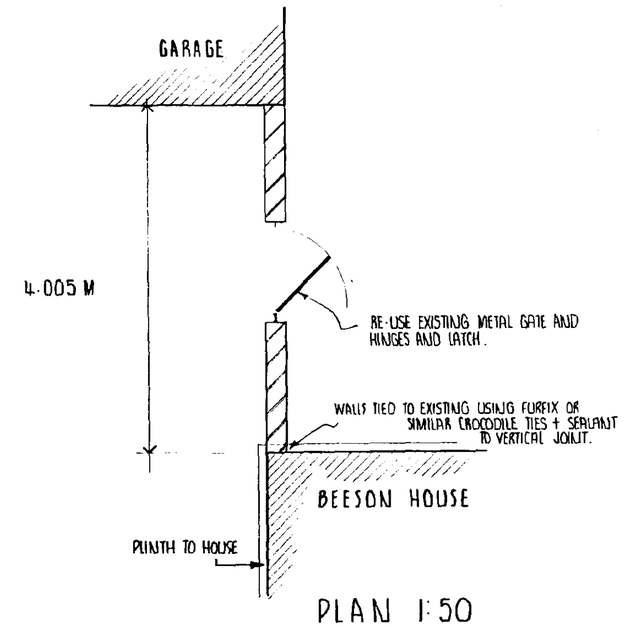

PLAN 1:50

SOUTH HOLLAND DC
HOUSING & PLANNING
17 NOV 1998
1115/98
DETERMINED
PLAN

CONTRACTOR TO CHECK ALL DIMENSIONS ON SITE BEFORE WORK COMMENCES.

revision	date	init.	revision details

PODDINGTONS
Architectural Design Consultants
44 Double Street, Spalding, Lincs. PE11 2AB
Tel: 0775 761856 & 768296. Fax: 0775 710218

project
PROPOSED WALL AT BEESON HOUSE
BELL LANE MOULTON SPALDING
LINCOLNSHIRE
CLIENT: MR. S. HASTINGS

drawing
PLAN PROPOSED

scale	drawing no
1:50 1:200 1:2500	2875
date: OCTOBER 1998	drawn: K Johnson / checked