




Flood Risk Assessment

Development at
Elsoms Way, Pinchbeck, Spalding, PE11 3JG

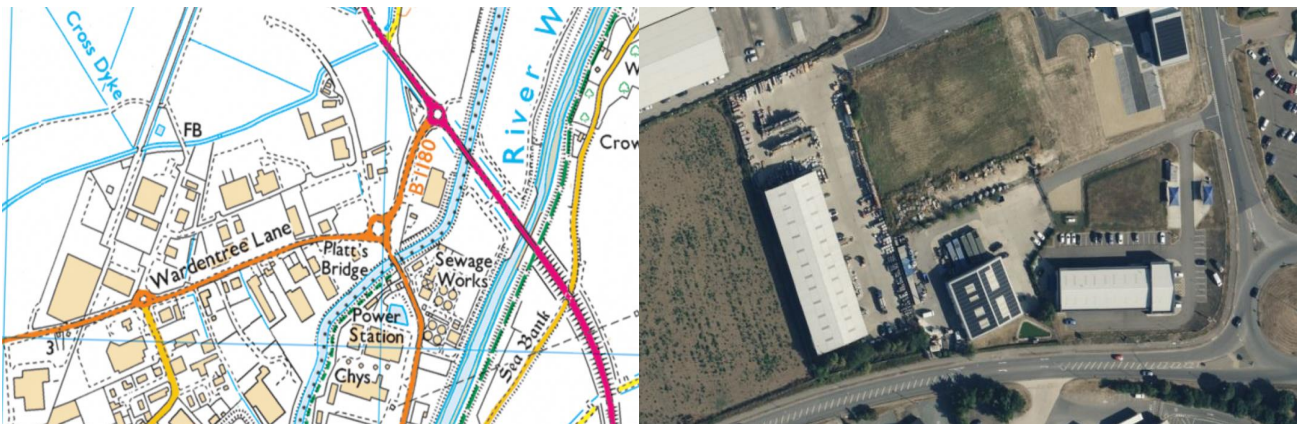

On behalf of
Maisie Odom

Date: 9th January 2024

Reference: WTFR-FRA-2024/09/Q04

Issue sheet

Revision	Prepared by	Date	Checked by	Date
0	JS	06/01/24	JH	09/01/24

Disclaimer

WtFR Ltd expressly disclaims responsibility for any error in, or omission from, this assessment arising from or in connection with any of the assumptions being incorrect.

The opinions, conclusions and any recommendations in this report are based on circumstances encountered and information evaluated at the time of preparation and WtFR expressly disclaims responsibility for any error in, or omission from, this report arising from or in connection with those opinions, conclusions and any recommendations.

WtFR does not accept any liability for the use of this report or its contents by any third party.

1. Introduction	1
2. Site Description	1
3. Flood Risk Assessment	3
3.1 National Planning Policy	3
3.2 Local Planning Policy	4
3.3 Flood Risk Zones, Vulnerability and Classification	4
4. Sources of flooding	8
4.1 Fluvial/Tidal	8
4.2 Historic Flooding	11
4.3 Surface Water Flooding	11
4.4 Reservoir	11
4.5 Groundwater	12
4.6 Geology	13
5. Proposed development	14
6. Surface Water Drainage	15
7. Hierarchy of disposing surface water	17
7.1 Infiltration	17
7.2 Surface Water Body	17
7.3 Surface Water or Combined Sewer	17
8. Use of SuDS	18
9. Management of flood risk	20
9.1 Fluvial/Tidal	20
9.2 Surface Water	20
9.3 Flood Resistance and Resilience Measures	21
9.4 Flood plan	21
10. Conclusions	23

1. Introduction

WtFR Ltd has been commissioned by Maisie Odom to undertake a Flood Risk Assessment (FRA) in connection with the planning application for the proposed development at Elsoms Way, Pinchbeck, Spalding, PE11 3JG.

This FRA has been produced to demonstrate how risks from all sources of flooding to the site and flood risk to others from the development will be managed, in order to satisfy the requirements, set out in the National Planning Policy Framework (NPPF).

A full assessment of the flood risk to the site and consideration of the surface water management as a result of the development has been considered as part of this analysis.

Data has been gathered from several other sources including: the Environment Agency (EA), the British Geological Society (BGS), National Soil Research Institute (NSRI), aerial photographs, Ordnance Survey (OS), commercially available historical mapping and relevant strategic documents developed by the South Holland District Council and Lincolnshire Council, in their capacity as both the Local Planning Authority and Lead Local Flood Authority.

2. Site Description

Area Size: 6000m²

Grid reference: TF 25844 25300

The proposals are for the construction of a new industrial unit at Elsoms Way, Pinchbeck, Spalding, PE11 3JG.

Figures 1 and 2 below show location details of the development site. Figure 3 shows an oblique aerial photograph of the development site.



Figure 1 – Location of the site, highlighted.

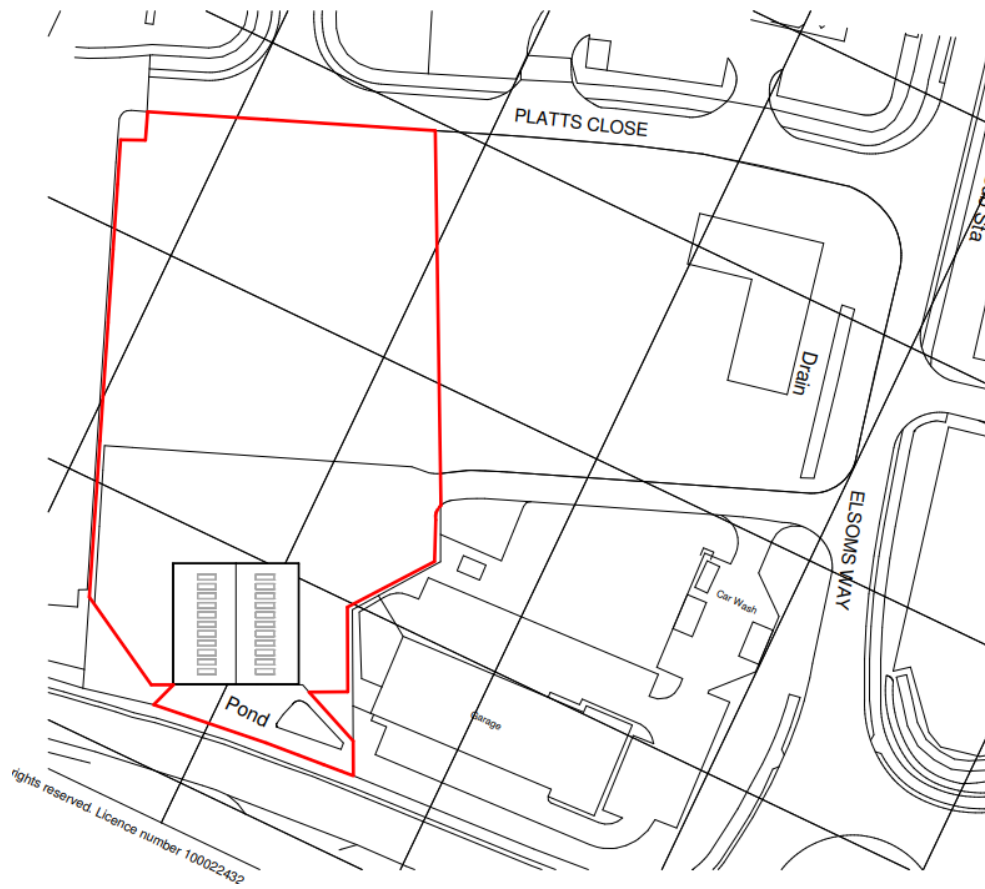


Figure 2 –detailed location of the development site, highlighted.

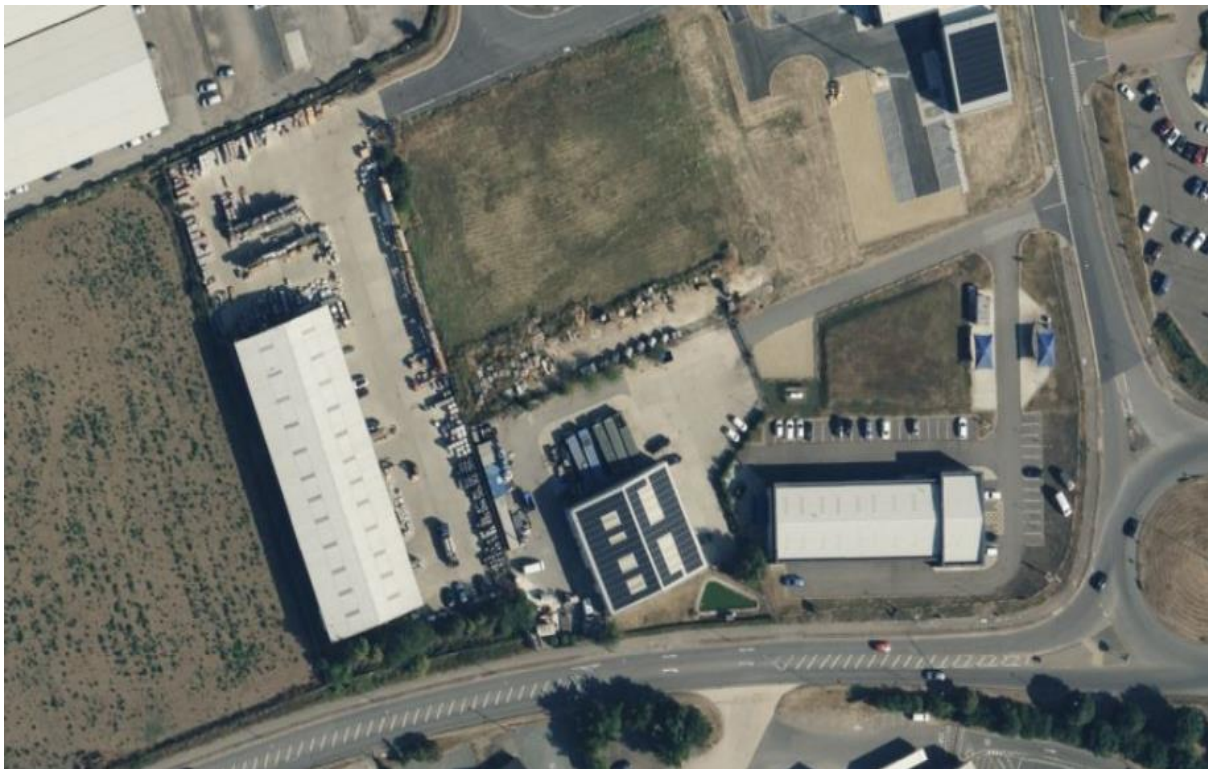


Figure 3 –oblique aerial photograph of the development site.

3. Flood Risk Assessment

3.1 National Planning Policy

Paragraph 167 of the NPPF states "When determining any planning applications, local planning authorities should ensure that flood risk is not increased elsewhere. Where appropriate, applications should be supported by a site-specific flood-risk assessment⁵⁰. Development should only be allowed in areas at risk of flooding where, in the light of this assessment (the sequential and exception tests, as applicable) it can be demonstrated that:

- a) within the site, the most vulnerable development is located in areas of lowest flood risk, unless there are overriding reasons to prefer a different location;
- b) the development is appropriately flood resistant and resilient;
- c) it incorporates sustainable drainage systems, unless there is clear evidence that this would be inappropriate;
- d) any residual risk can be safely managed; and
- e) safe access and escape routes are included where appropriate, as part of an agreed emergency plan".

Footnote 55 states "A site-specific flood risk assessment should be provided for all development in Flood Zones 2 and 3. In Flood Zone 1, an assessment should accompany all proposals involving: sites of 1 hectare or more; land which has been identified by the Environment Agency as having critical drainage problems; land identified in a strategic flood risk assessment as being at increased flood risk in future; or land that may be subject to other sources of flooding, where its development would introduce a more vulnerable use".

Furthermore paragraph 30 of the Planning Practice Guide on Flood Risk and Climate Change states "A site-specific flood risk assessment is carried out by (or on behalf of) a developer to assess the flood risk to and from a development site. Where necessary, the assessment should accompany a planning application submitted to the local planning authority. The assessment should demonstrate to the decision-maker how flood risk will be managed now and over the development's lifetime, taking climate change into account, and with regard to the vulnerability of its users.

The objectives of a site-specific flood risk assessment are to establish:

- whether a proposed development is likely to be affected by current or future flooding from any source;
- whether it will increase flood risk elsewhere;
- whether the measures proposed to deal with these effects and risks are appropriate;
- the evidence for the local planning authority to apply (if necessary) the Sequential Test, and;
- whether the development will be safe and pass the Exception Test, if applicable".

Continuing paragraph 31 of the Planning Practice Guidance quotes "The information provided in the flood risk assessment should be credible and fit for purpose. Site-specific flood risk assessments should always be proportionate to the degree of flood risk and make optimum use of information already available, including information in a Strategic Flood Risk

Assessment for the area, and the interactive flood risk maps available on the Environment Agency's web site.

A flood risk assessment should also be appropriate to the scale, nature and location of the development. For example, where the development is an extension to an existing house (for which planning permission is required) which would not significantly increase the number of people present in an area at risk of flooding, the local planning authority would generally need a less detailed assessment to be able to reach an informed decision on the planning application. For a new development comprising a greater number of houses in a similar location, or one where the flood risk is greater, the local planning authority would need a more detailed assessment".

3.2 Local Planning Policy

Local Authorities consider flood risk through relevant environmental and climate change policies which enforce the requirements of the NPPF. Relevant local policy, as outlined by South Holland District Council and Lincolnshire Council, is contained within the;

- i) Strategic Flood Risk Assessment
- ii) Local Flood Risk Management Strategy

The Strategic Flood Risk Assessment (SFRA) and the Local Flood Risk Management Strategy (LFRMS) are key sources of flood risk specific information for the area. The SFRA provides a more detailed review of flood risks and recommendations for ensuring developments can be constructed and operated safely in accordance with the NPPF.

3.3 Flood Risk Zones, Vulnerability and Classification

These Flood Zones refer to the probability of river and sea flooding, ignoring the presence of defences. They are shown on the Environment Agency's Flood Map for Planning available on the Environment Agency's web site, as indicated in the table below.

Table 1 – Flood Zones

Flood Zone	Definition
Zone 1 <i>Low Probability</i>	Land having a less than 1 in 1,000 annual probability of river or sea flooding. (Shown as 'clear' on the Flood Map – all land outside Zones 2 and 3)
Zone 2 <i>Medium Probability</i>	Land having between a 1 in 100 and 1 in 1,000 annual probability of river flooding; or Land having between a 1 in 200 and 1 in 1,000 annual probability of sea flooding. (Land shown in light blue on the Flood Map)
Zone 3a <i>High Probability</i>	Land having a 1 in 100 or greater annual probability of river flooding; or Land having a 1 in 200 or greater annual probability of sea flooding. (Land shown in dark blue on the Flood Map)
Zone 3b <i>The Functional Floodplain</i>	This zone comprises land where water has to flow or be stored in times of flood. Local planning authorities should identify in their Strategic Flood Risk Assessments areas of functional floodplain and its boundaries accordingly, in agreement with the Environment Agency. (Not separately distinguished from Zone 3a on the Flood Map)

Table 2 – Flood Risk Vulnerability Classification

Essential Infrastructure
• Essential transport infrastructure (including mass evacuation routes) which has to cross the area at risk. • Essential utility infrastructure which has to be located in a flood risk area for operational reasons, including electricity generating power stations and grid and primary substations; and water treatment works that need to remain operational in times of flood. • Wind turbines.
Highly Vulnerable
• Police and ambulance stations; fire stations and command centres; telecommunications installations required to be operational during flooding. • Emergency dispersal points. • Basement dwellings. • Caravans, mobile homes and park homes intended for permanent residential use. • Installations requiring hazardous substances consent (Where there is a demonstrable need to locate such installations for bulk storage of materials with port or other similar facilities, or such installations with energy infrastructure or carbon capture and storage installations, that require coastal or water-side locations, or need to be located in other high flood risk areas, in these instances the facilities should be classified as 'Essential Infrastructure').
More Vulnerable
• Hospitals • Residential institutions such as residential care homes, children's homes, social services homes, prisons and hostels. • Buildings used for dwelling houses, student halls of residence, drinking establishments, nightclubs and hotels. • Non-residential uses for health services, nurseries and educational establishments. • Landfill* and sites used for waste management facilities for hazardous waste. • Sites used for holiday or short-let caravans and camping, subject to a specific warning and evacuation plan.
Less Vulnerable
• Police, ambulance and fire stations which are not required to be operational during flooding. • Buildings used for shops; financial, professional and other services; restaurants, cafes and hot food takeaways; offices; general industry, storage and distribution; non-residential institutions not included in the 'More Vulnerable' class; and assembly and leisure. • Land and buildings used for agriculture and forestry. • Waste treatment (except landfill* and hazardous waste facilities). • Minerals working and processing (except for sand and gravel working). • Water treatment works which do not need to remain operational during times of flood.

Sewage treatment works, if adequate measures to control pollution and manage sewage during flooding events are in place.
Water Compatible Development - Flood control infrastructure. - Water transmission infrastructure and pumping stations. - Sewage transmission infrastructure and pumping stations. - Sand and gravel working. - Docks, marinas and wharves. - Navigation facilities. - Ministry of Defence installations. - Ship building, repairing and dismantling, dockside fish processing and refrigeration and compatible activities requiring a waterside location. - Water-based recreation (excluding sleeping accommodation). - Lifeguard and coastguard stations. - Amenity open space, nature conservation and biodiversity, outdoor sports and recreation and essential facilities such as changing rooms. - Essential ancillary sleeping or residential accommodation for staff required by uses in this category, subject to a specific warning and evacuation plan.

* Landfill as defined in Schedule 10 to the Environmental Permitting (England and Wales) Regulations 2010.

Table 3 - Flood risk vulnerability and flood zone 'compatibility'

Flood Zones	Flood Risk Vulnerability Classification				
	Essential Infrastructure	Highly Vulnerable	More Vulnerable	Less Vulnerable	Water Compatible
Zone 1	✓	✓	✓	✓	✓
Zone 2	✓	Exception Test required	✓	✓	✓
Zone 3a†	Exception Test required†	X	Exception Test required	✓	✓
Zone 3b*	Exception Test required*	X	X	X	✓*

Key:

✓ Development is appropriate

X Development should not be permitted.

Notes to table 3:

- This table does not show the application of the Sequential Test which should be applied first to guide development to Flood Zone 1, then Zone 2, and then Zone 3; nor does it reflect the need to avoid flood risk from sources other than rivers and the sea;
- The Sequential and Exception Tests do not need to be applied to minor developments and changes of use, except for a change of use to a caravan, camping or chalet site, or to a mobile home or park home site;

WTFR-FRA-2024/09/Q04

- Some developments may contain different elements of vulnerability and the highest vulnerability category should be used, unless the development is considered in its component parts.

† In Flood Zone 3a essential infrastructure should be designed and constructed to remain operational and safe in times of flood.

* In Flood Zone 3b (functional floodplain) essential infrastructure that has to be there and has passed the Exception Test, and water-compatible uses, should be designed and constructed to:

- remain operational and safe for users in times of flood;
- result in no net loss of floodplain storage;
- not impede water flows and not increase flood risk elsewhere.

4. Sources of flooding

4.1 Fluvial/Tidal

The Environment Agency's Flood Map for Planning (Rivers and Sea) identifies fluvial and tidal flood zones, and provides an indication of whether or not these zones are protected, due to the presence of flood defences (also highlighted). Figure 4, below, presents the Flood Map for the surrounding area.

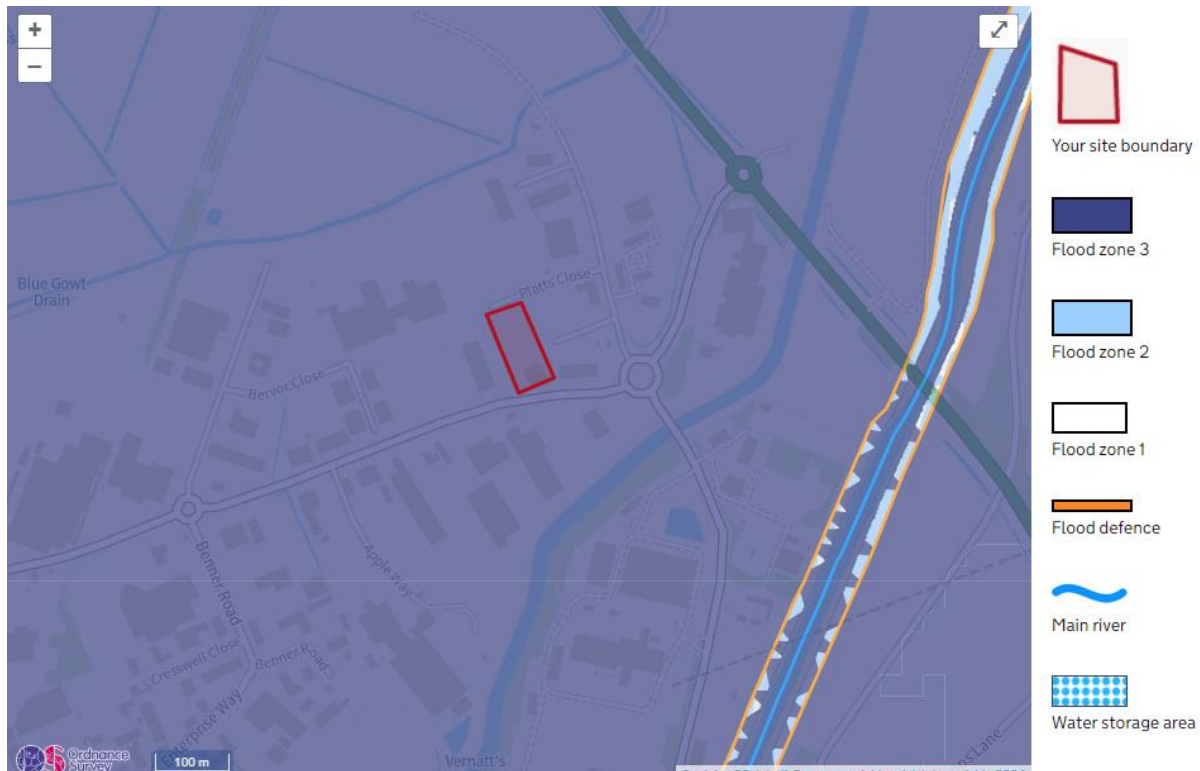


Figure 4 – Fluvial flood risk – EA Flood Map.

The EA Flood Map identifies the development site to lie within Flood Zone 3, where the chance of flooding in any given year is greater than 1 in 100 (1%).

Further information from the Environment Agency on fluvial and tidal modelled flooding is presented below.

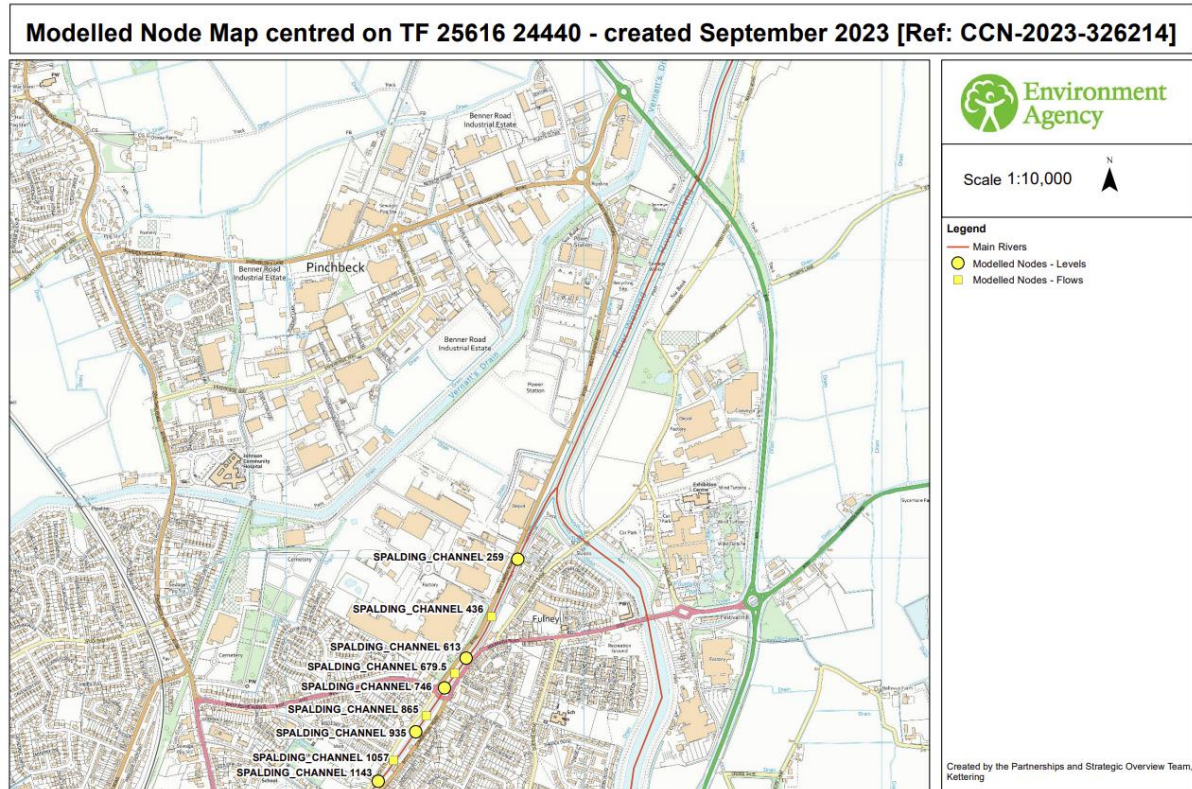


Figure 5 – Fluvial Node locations

Fluvial Flood Levels (mODN)

The fluvial flood levels for the model nodes shown on the attached map are set out in the table below. They are measured in metres above Ordnance Datum Newlyn (mODN).

Node Label	Easting	Northing	Annual Exceedance Probability - Maximum Water Levels (mODN)											
			50% (1 in 2)	20% (1 in 5)	10% (1 in 10)	5% (1 in 20)	3.33% (1 in 30)	2% (1 in 50)	1.33% (1 in 75)	1% (1 in 100)	0.5% (1 in 200)	0.1% (1 in 1000)	1% (1 in 100) inc 20% Climate Change	0.1% (1 in 1000) inc 20% Climate Change
SPALDING_CHANNEL 259	259	525779	3.70	4.00	4.17	4.45	4.50	4.51	4.52	4.52	4.53	4.56	4.68	4.68
SPALDING_CHANNEL 613	613	525605	3.70	4.00	4.17	4.45	4.50	4.51	4.52	4.52	4.53	4.55	4.68	4.68
SPALDING_CHANNEL 746	746	525532	3.70	4.00	4.17	4.45	4.50	4.51	4.52	4.52	4.53	4.55	4.68	4.68
SPALDING_CHANNEL 935	935	525435	3.70	4.00	4.17	4.45	4.50	4.51	4.52	4.52	4.53	4.55	4.68	4.68
SPALDING_CHANNEL 1143	1143	525310	3.70	3.99	4.17	4.45	4.50	4.51	4.52	4.52	4.53	4.55	4.67	4.68

Figure 6 – Modelled flood levels

Spalding Channel 259 is closest to the development site and this node needs to be read for predicted fluvial flood levels. The 1 in 100 year level is 4.52mAO and the 1 in 1000 year level is 4.68. There is no 1 in 100 year plus climate change level, but the 1 in 1000 year plus climate change level is the same as the 1 in 1000 year level. As such, it is fair to state that the 1 in 100 year plus climate level is also 4.52mAO.

East Coast and Wash - 2018 Coastal Flood Boundary [CFB] Dataset Key Node Points

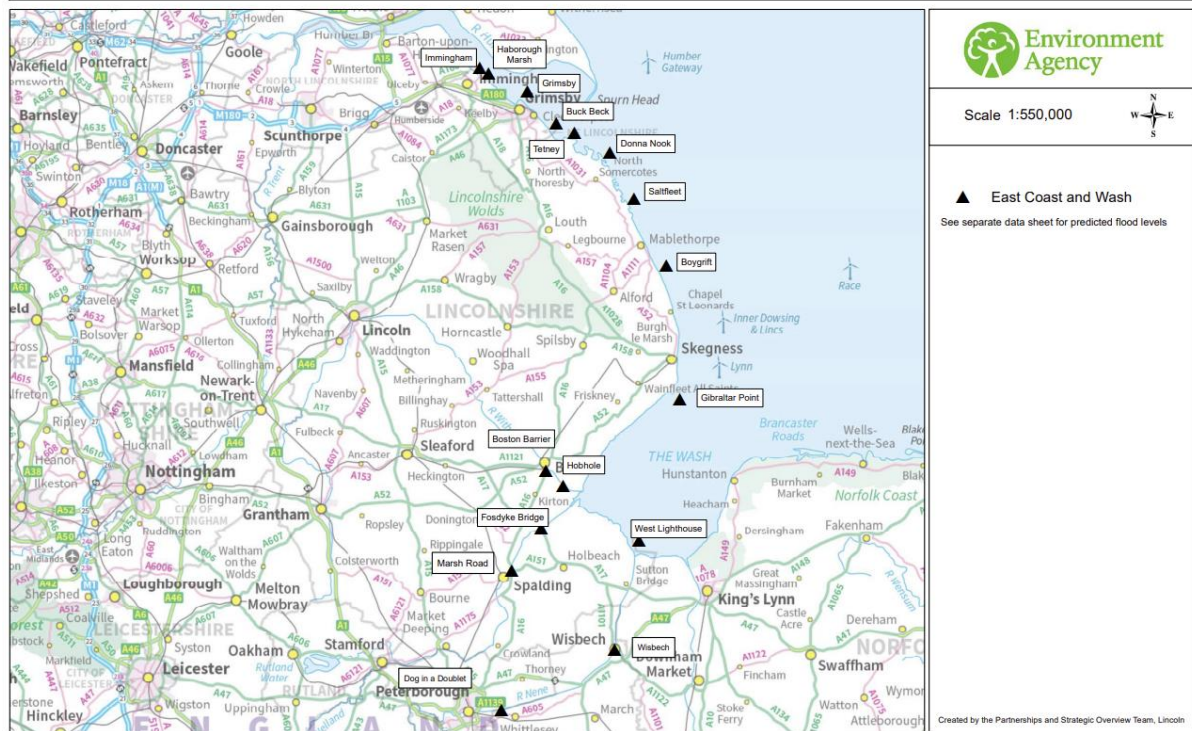


Figure 7 – Tidal Node Locations

CFB REF	LOCATION	EASTING	NORTHING	ANNUAL CHANCE (1 IN X) OF TIDE LEVEL IN METRES ODN																					
				1			10			50			100			200			300			1000			
				Confidence Bound			Confidence Bound			Confidence Bound			Confidence Bound			Confidence Bound			Confidence Bound			Confidence Bound			
				2.5%	50%	97.5%	2.5%	50%	97.5%	2.5%	50%	97.5%	2.5%	50%	97.5%	2.5%	50%	97.5%	2.5%	50%	97.5%	2.5%	50%	97.5%	
3888	Immingham	520440	417625	4.16	4.17	4.19	4.50	4.53	4.62	4.73	4.80	5.00	4.83	4.93	5.19	4.93	5.06	5.41	4.98	5.14	5.55	5.15	5.38	6.01	
3890	Haborough Marsh	522100	416512	4.14	4.15	4.17	4.48	4.51	4.60	4.70	4.77	4.97	4.80	4.90	5.16	4.90	5.03	5.38	4.94	5.10	5.51	5.11	5.34	5.97	
3898	Grimsby	529295	413162	3.98	3.99	4.01	4.31	4.34	4.43	4.53	4.60	4.80	4.61	4.71	4.97	4.71	4.84	5.19	4.74	4.90	5.31	4.88	5.11	5.74	
3906	Buck Beck	534709	407369	3.87	3.88	3.90	4.19	4.23	4.31	4.41	4.50	4.68	4.50	4.61	4.86	4.61	4.75	5.10	4.64	4.82	5.22	4.80	5.05	5.66	
3910	Tetney	538035	405537	3.85	3.86	3.89	4.17	4.22	4.30	4.40	4.50	4.67	4.49	4.61	4.86	4.60	4.75	5.10	4.63	4.82	5.21	4.80	5.06	5.66	
3918	Donna Nook	544641	401997	3.82	3.83	3.86	4.14	4.19	4.27	4.38	4.48	4.65	4.47	4.60	4.85	4.58	4.74	5.10	4.63	4.82	5.22	4.81	5.08	5.68	
3928	Saltfleet	549131	393360	3.78	3.79	3.82	4.11	4.16	4.26	4.36	4.46	4.64	4.47	4.59	4.86	4.57	4.74	5.11	4.63	4.83	5.25	4.83	5.11	5.74	
3942	Boygriff	555131	380860	3.72	3.74	3.77	4.06	4.11	4.22	4.33	4.43	4.65	4.43	4.57	4.87	4.56	4.73	5.13	4.62	4.83	5.28	4.85	5.15	5.82	
3968	Gibraltar Point	557652	356181	4.16	4.17	4.20	4.51	4.56	4.67	4.76	4.85	5.08	4.85	4.97	5.27	4.94	5.10	5.49	4.99	5.18	5.63	5.14	5.41	6.09	
3992_14	Hobhole	535990	340116	4.96	4.97	5.01	5.40	5.44	5.56	5.66	5.76	5.98	5.78	5.90	6.20	5.88	6.04	6.44	5.92	6.11	6.57	6.03	6.31	6.99	
3992_9	Grand Sluice*	532366	344510	4.93	4.94	4.98	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	
	Boston Barrier	532754	342852	4.93	4.94	4.98	5.41	5.45	5.57	5.73	5.83	6.05	5.85	5.97	6.27	5.93	6.09	6.49	5.94	6.13	6.59	5.98	6.26	6.94	
3992_5	Fosdyke Bridge	531886	332234	4.87	4.88	4.92	5.31	5.35	5.47	5.58	5.68	5.90	5.71	5.83	6.13	5.82	5.98	6.38	5.87	6.06	6.52	6.01	6.29	6.97	
4008	West Lighthouse	550094	329971	4.87	4.88	4.91	5.21	5.26	5.37	5.46	5.56	5.78	5.56	5.68	5.98	5.66	5.82	6.21	5.71	5.90	6.35	5.86	6.14	6.81	
-	Marsh Road	525988	324065	-	5.04	-	-	5.44	-	-	5.73	-	-	5.85	-	-	5.98	-	-	-	-	-	-	-	
-	Wisbech	546110	309940	-	4.83	-	-	5.25	-	-	5.53	-	-	5.66	-	-	5.78	-	-	-	-	-	-	-	
-	Dog-In-a-Doublet	527200	299287	-	3.67	-	-	4.00	-	-	4.22	-	-	4.32	-	-	4.42	-	-	-	-	-	-	-	

The following notes apply to all Marsh Road, Wisbech, Dog-in-a-Doublet

- The base date for the data is 2006
- The levels are still water levels. Depending on the use of the data it may be necessary to consider wave heights and / or joint probability analysis of water level and other variables.
- Levels for other annual chance probabilities are available if required.
- These levels will be updated as their respective tidal river models are updated.

Figure 8 – Modelled Tidal Levels

WTFR-FRA-2024/09/Q04


The Marsh Road node is closest to the development. The predicted 1 in 200 year level is 5.98mAOD. No climate change levels have been presented with the modelled outputs.

4.2 Historic Flooding

Analysis of strategic flood risk documents developed by South Holland District Council and Lincolnshire Council does not indicate any historic flooding.

4.3 Surface Water Flooding

The Environment Agency's updated Flood Map for Surface Water (uFMfSW) identifies pluvial flood risk. Figure 8, below, presents the uFMfSW for the development site and the surrounding area.

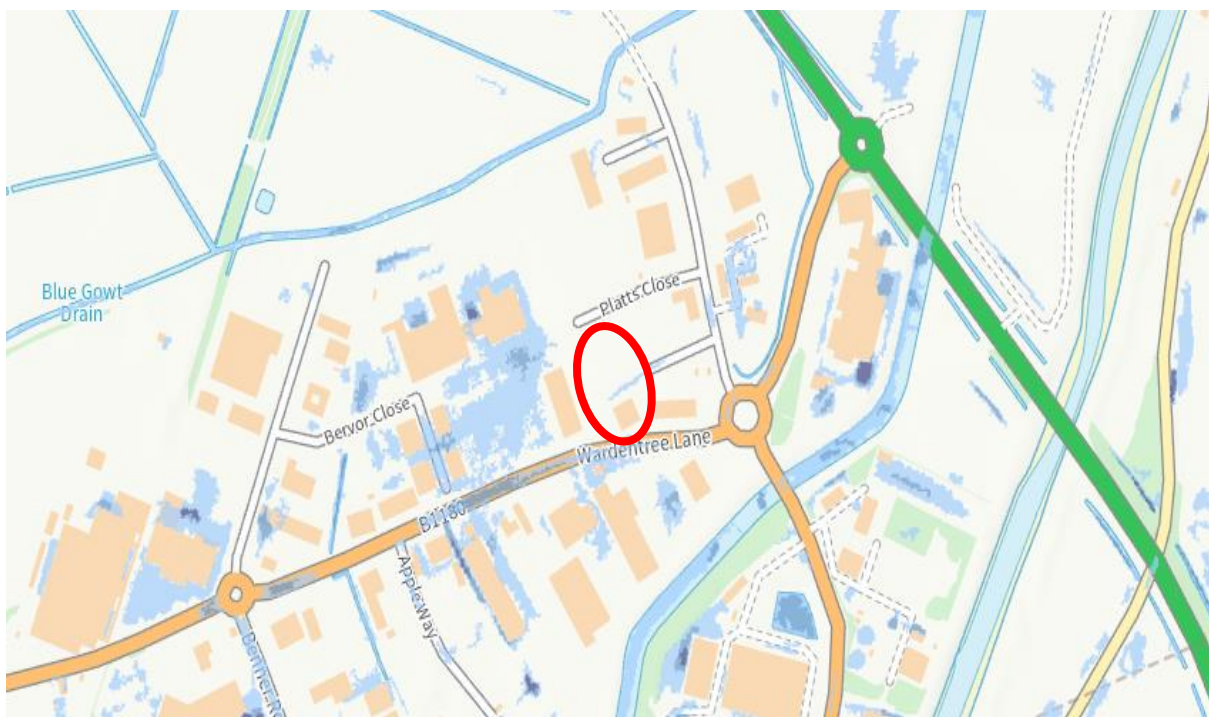

Extent of flooding from surface water

● High
 ● Medium
 ● Low
 Very low
 ⊕ Location you selected

Figure 5 – Flooding from surface water sources, uFMfSW, site highlighted.

The uFMfSW shows that area in the vicinity of the development site is at low risk of surface water flooding. Low risk means that the probability of flooding in any given year is between 1 in 1000 (0.1%) and 1 in 100 (1%).

4.4 Reservoir

The Environment Agency's Risk of Reservoir Flooding Map identifies the maximum extent of flooding that may be expected in the unlikely event that a reservoir dam failed. The development is not at risk of flooding.

4.5 Groundwater

The Environment Agency's Groundwater Vulnerability Map indicates that the development site is situated over an unproductive groundwater vulnerability area, as shown in Figure 6. Further analysis shows that the development site is not situated over a Groundwater Source Protection Zone as shown in Figure 7.

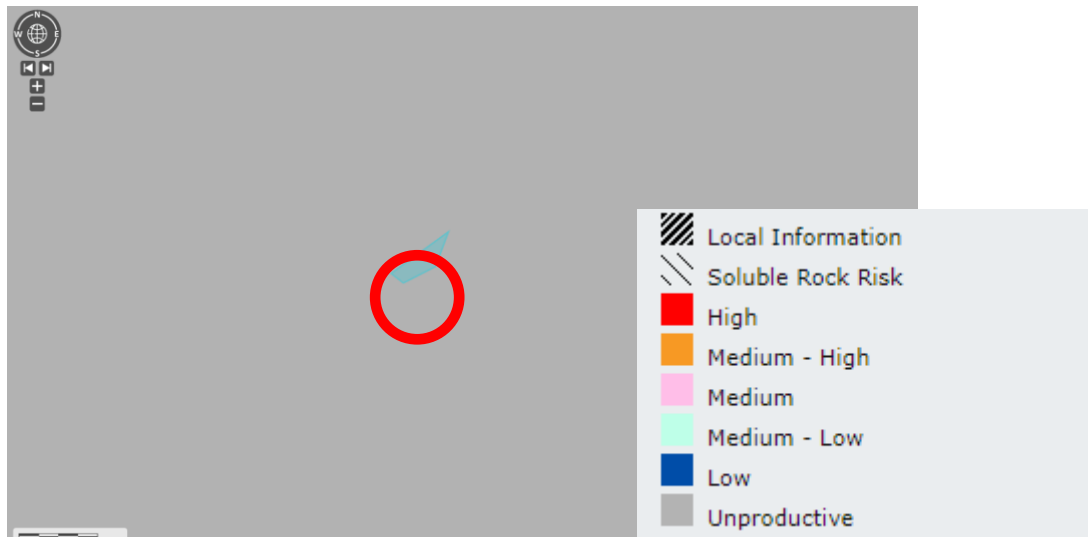


Figure 6 – Groundwater vulnerability map, site highlighted.

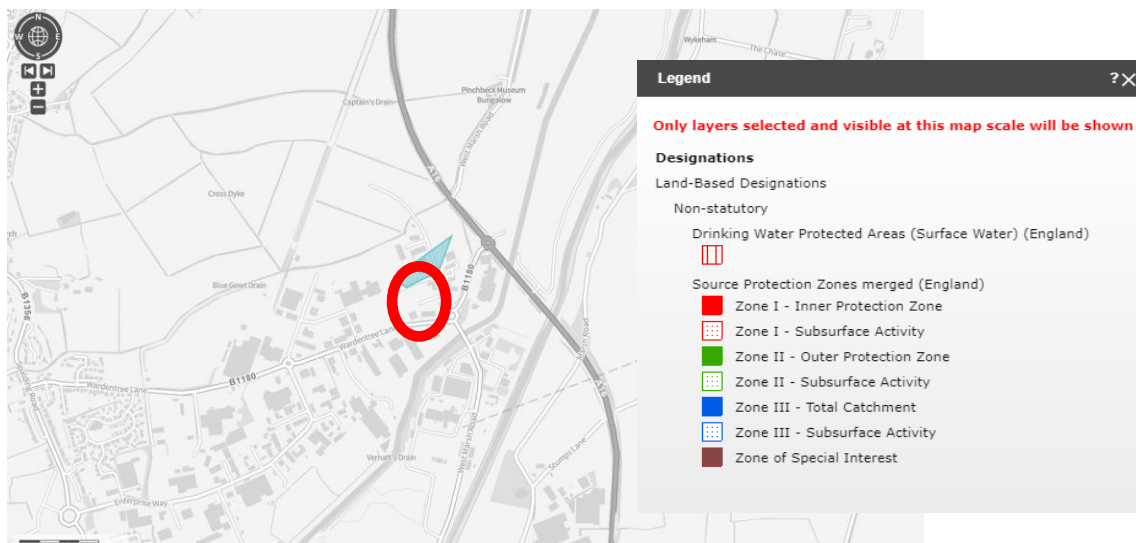


Figure 7 – Groundwater source protection zones, site highlighted.

Due to the minimal groundworks (for the construction of shallow foundations) the impact on groundwater is considered to be negligible.

However, it is recommended that a groundwater mitigation plan is developed that may be implemented if groundwater is encountered during construction.

4.6 Geology

Figures 8 and 9 present information from the British Geological Survey.

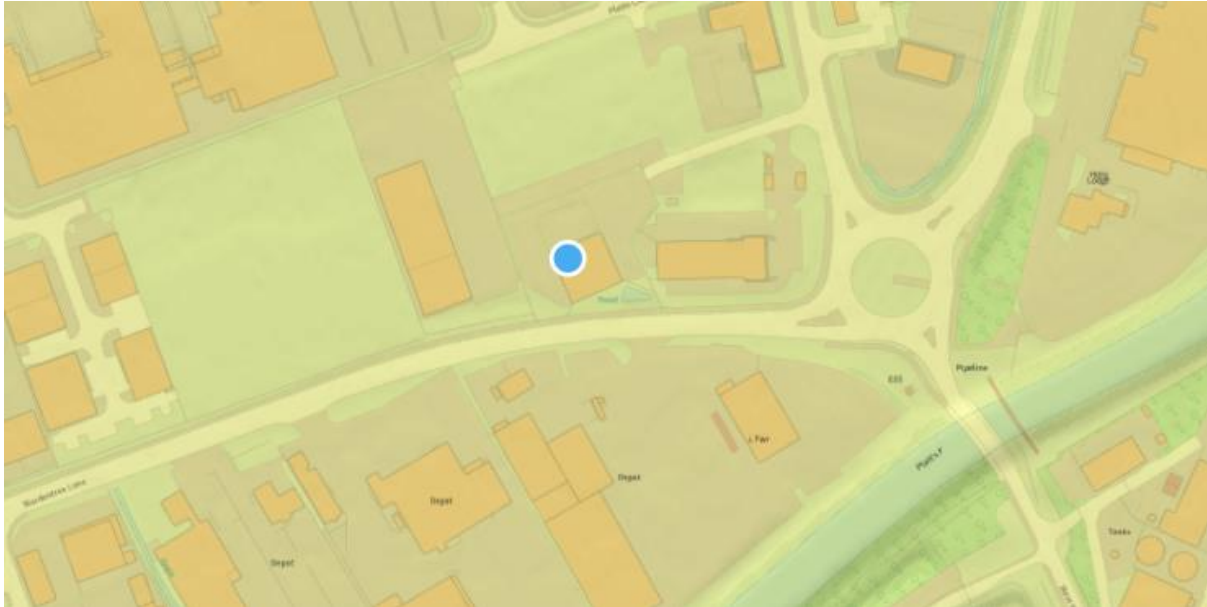


Figure 8 – Superficial Geology of the development.

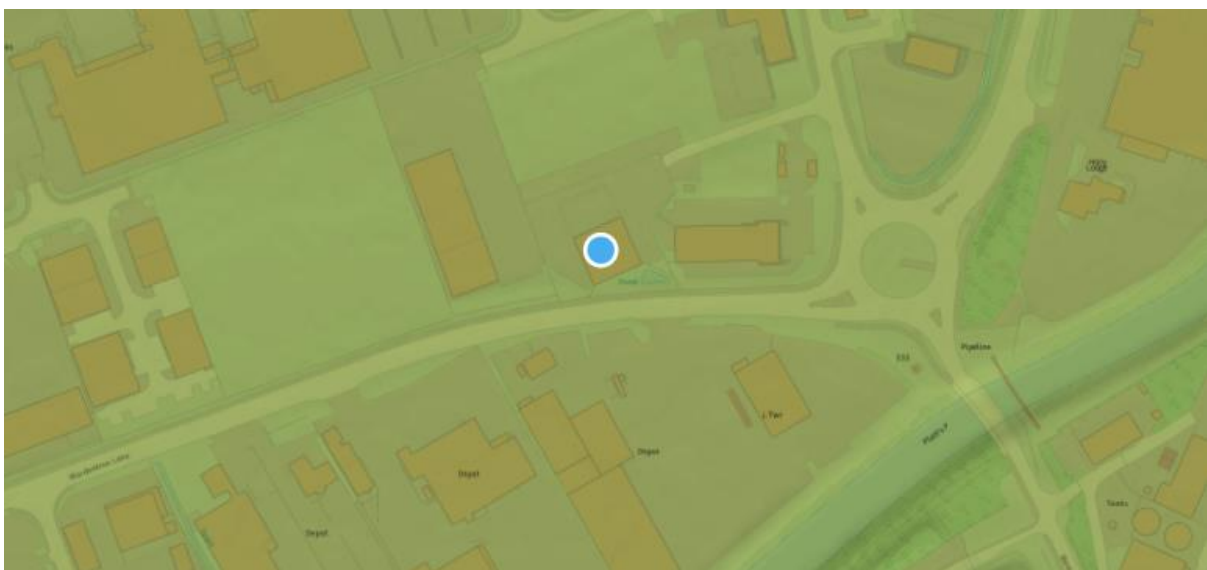


Figure 9 – Bedrock geology of the development.

The superficial deposits at the development site are described as Tidal Flat Deposits - Clay and silt. Sedimentary superficial deposit formed between 11.8 thousand years ago and the present during the Quaternary period.

With regards to the bedrock, the site is underlain by the Oxford Clay Formation - Mudstone. Sedimentary bedrock formed between 166.1 and 157.3 million years ago during the Jurassic period.

5. Proposed development

This FRA is prepared to support a planning application for the construction of a new industrial unit at Elsom's Way, Pinchbeck, Spalding, PE11 3JG.

Developments used for industrial units are classified as being **Less Vulnerable** development within Table 2 of the Planning Practice Guidance. Less Vulnerable developments are acceptable within Flood Zone 3.

Figure 10 shows the proposed site layout.

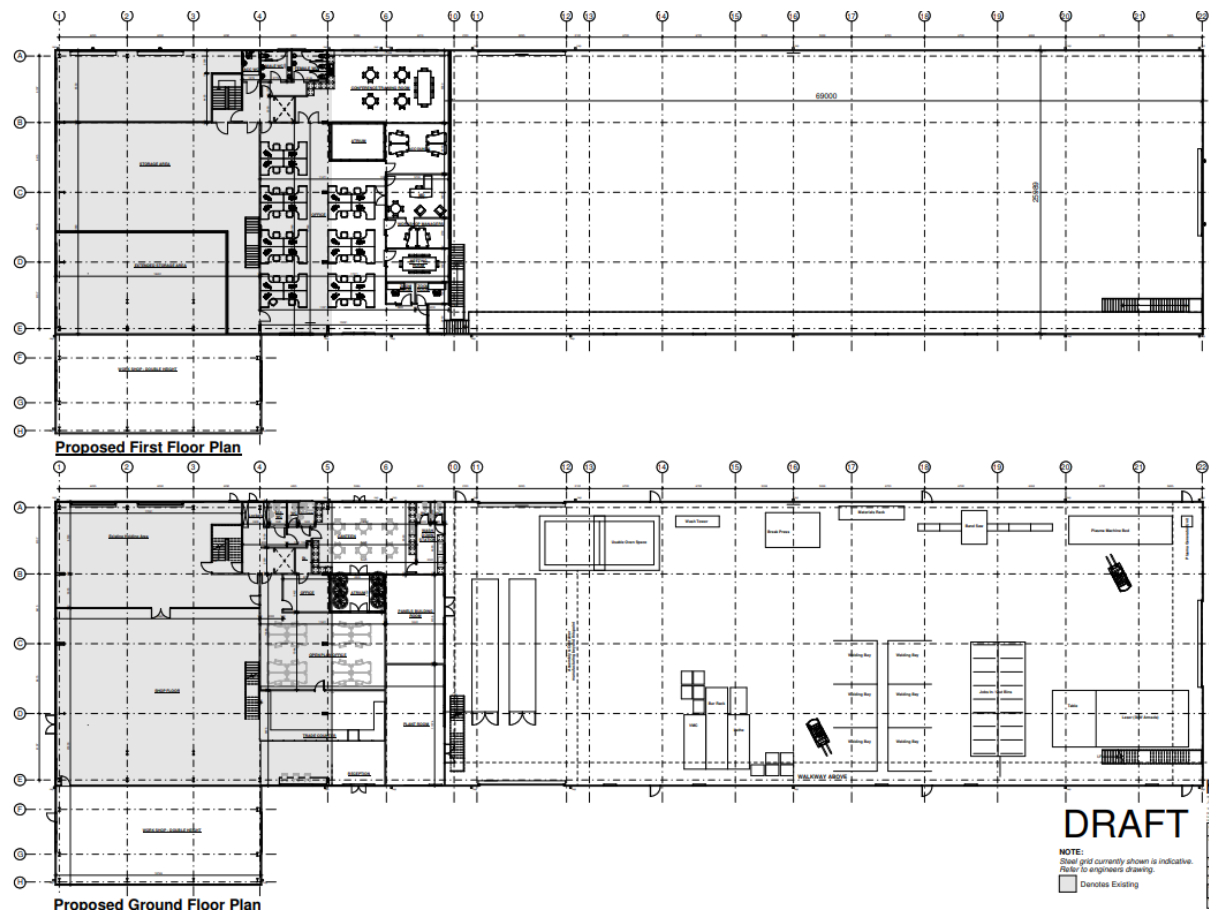


Figure 10 – Proposed site layout.

6. Surface Water Drainage

The greenfield runoff rate has been calculated using IH124 methodology. Table 4 below shows the calculations to determine the existing greenfield runoff rate.



Calculated by: James Scott

Site name: Development site

Site location: Elsom's Way

This is an estimation of the greenfield runoff rates that are used to meet normal best practice criteria in line with Environment Agency guidance "Rainfall runoff management for developments", S0030219 (2013), the SuDS Manual C753 (Ciria, 2015) and the non-statutory standards for SuDS (Defra, 2015). This information on greenfield runoff rates may be the basis for setting consents for the drainage of surface water runoff from sites.

Greenfield runoff rate estimation for sites

www.ukstds.com | Greenfield runoff tool

Site Details

Latitude: 52.81050° N

Longitude: 0.13448° W

Reference: 663238846

Date: Jan 06 2024 17:10

Runoff estimation approach: IH124

Site characteristics

Total site area (ha): 0.6

Methodology

Q_{BAR} estimation method: Calculate from SPR and SAAR

SPR estimation method: Calculate from SOIL type

Soil characteristics

	Default	Edited
SOIL type:	2	2
HOST class:	N/A	N/A
SPR/SPRHOST:	0.3	0.3

Hydrological characteristics

	Default	Edited
SAAR (mm):	560	560
Hydrological region:	5	5
Growth curve factor 1 year:	0.87	0.87
Growth curve factor 30 years:	2.45	2.45
Growth curve factor 100 years:	3.56	3.56
Growth curve factor 200 years:	4.21	4.21
Q _{BAR} (l/s):	0.84	0.84
1 in 1 year (l/s):	0.73	0.73
1 in 30 years (l/s):	2.06	2.06
1 in 100 years (l/s):	3	3
1 in 200 years (l/s):	3.55	3.55

Notes

(1) Is Q_{BAR} < 2.0 l/s/ha?

When Q_{BAR} is < 2.0 l/s/ha then limiting discharge rates are set at 2.0 l/s/ha.

(2) Are flow rates < 5.0 l/s?

Where flow rates are less than 5.0 l/s consent for discharge is usually set at 5.0 l/s if blockage from vegetation and other materials is possible. Lower consent flow rates may be set where the blockage risk is addressed by using appropriate drainage elements.

(3) Is SPR/SPRHOST ≤ 0.3?

Where groundwater levels are low enough the use of soakaways to avoid discharge offsite would normally be preferred for disposal of surface water runoff.

Table 4 – Greenfield runoff calculations.

The Q_{bar} Greenfield runoff rate is 0.84l/s. It is recommended that post development discharge rates are limited to 5l/s in accordance with industry best practice.

Due to the lack of permeable ground infiltration is not a viable method of surface water disposal and so surface water attenuation will be required.

WTFR-FRA-2024/09/Q04

Table 5 below looks at the required attenuation that will be required on site. The figures include an allowance of 1.4 (+40%) for climate change.

The calculations show that 636m³ of attenuation is required.

Calculated by:	James Scott	Site Details	
Site name:	Development site	Latitude:	52.81040° N
Site location:	Elsoms Way	Longitude:	0.13434° W
This is an estimation of the storage volume requirements that are needed to meet normal best practice criteria in line with Environment Agency guidance "Rainfall runoff management for developments", SC030219 (2013), the SuDS Manual C753 (Ciria, 2015) and the non-statutory standards for SuDS (Defra, 2015). It is not to be used for detailed design of drainage systems. It is recommended that hydraulic modelling software is used to calculate volume requirements and design details before finalising the design of the drainage scheme.		Reference:	2984957235
		Date:	Jan 06 2024 17:16

Site characteristics		Methodology					
Total site area (ha):	0.6	esti	IH124				
Significant public open space (ha):	0	Q _{BAR} estimation method:	Calculate from SPR and SAAR				
Area positively drained (ha):	0.6	SPR estimation method:	Calculate from SOIL type				
Impermeable area (ha):	0.6	Soil characteristics					
Percentage of drained area that is impermeable (%):	100	SOIL type:	<table border="1"> <tr> <th>Default</th> <th>Edited</th> </tr> <tr> <td>2</td> <td>2</td> </tr> </table>	Default	Edited	2	2
Default	Edited						
2	2						
Impervious area drained via infiltration (ha):	0	SPR:	<table border="1"> <tr> <th>Default</th> <th>Edited</th> </tr> <tr> <td>0.3</td> <td>0.3</td> </tr> </table>	Default	Edited	0.3	0.3
Default	Edited						
0.3	0.3						
Return period for infiltration system design (year):	10	Hydrological characteristics					
Impervious area drained to rainwater harvesting (ha):	0	Rainfall 100 yrs 6 hrs:	<table border="1"> <tr> <th>Default</th> <th>Edited</th> </tr> <tr> <td>--</td> <td>63</td> </tr> </table>	Default	Edited	--	63
Default	Edited						
--	63						
Return period for rainwater harvesting system (year):	10	Rainfall 100 yrs 12 hrs:	<table border="1"> <tr> <th>Default</th> <th>Edited</th> </tr> <tr> <td>--</td> <td>97.79</td> </tr> </table>	Default	Edited	--	97.79
Default	Edited						
--	97.79						
Compliance factor for rainwater harvesting system (%):	66	FEH / FSR conversion factor:	<table border="1"> <tr> <th>Default</th> <th>Edited</th> </tr> <tr> <td>1.27</td> <td>1.27</td> </tr> </table>	Default	Edited	1.27	1.27
Default	Edited						
1.27	1.27						
Net site area for storage volume design (ha):	0.6	SAAR (mm):	<table border="1"> <tr> <th>Default</th> <th>Edited</th> </tr> <tr> <td>560</td> <td>560</td> </tr> </table>	Default	Edited	560	560
Default	Edited						
560	560						
Net impermeable area for storage volume design (ha):	0.6	M5-60 Rainfall Depth (mm):	<table border="1"> <tr> <th>Default</th> <th>Edited</th> </tr> <tr> <td>20</td> <td>20</td> </tr> </table>	Default	Edited	20	20
Default	Edited						
20	20						
Pervious area contribution to runoff (%):	30	r' Ratio M5-60/M5-2 day:	<table border="1"> <tr> <th>Default</th> <th>Edited</th> </tr> <tr> <td>0.4</td> <td>0.4</td> </tr> </table>	Default	Edited	0.4	0.4
Default	Edited						
0.4	0.4						
* where rainwater harvesting or infiltration has been used for managing surface water runoff such that the effective impermeable area is less than 50% of the 'area positively drained', the 'net site area' and the estimates of Q_{BAR} and other flow rates will have been reduced accordingly.		Hydrological region:	<table border="1"> <tr> <th>Default</th> <th>Edited</th> </tr> <tr> <td>5</td> <td>5</td> </tr> </table>	Default	Edited	5	5
		Default	Edited				
		5	5				
		Growth curve factor 1 year:	<table border="1"> <tr> <th>Default</th> <th>Edited</th> </tr> <tr> <td>0.87</td> <td>0.87</td> </tr> </table>	Default	Edited	0.87	0.87
		Default	Edited				
0.87	0.87						
Growth curve factor 10 year:	<table border="1"> <tr> <th>Default</th> <th>Edited</th> </tr> <tr> <td>1.65</td> <td>1.65</td> </tr> </table>	Default	Edited	1.65	1.65		
Default	Edited						
1.65	1.65						
Growth curve factor 30 year:	<table border="1"> <tr> <th>Default</th> <th>Edited</th> </tr> <tr> <td>2.45</td> <td>2.45</td> </tr> </table>	Default	Edited	2.45	2.45		
Default	Edited						
2.45	2.45						
Growth curve factor 100 years:	<table border="1"> <tr> <th>Default</th> <th>Edited</th> </tr> <tr> <td>3.56</td> <td>3.56</td> </tr> </table>	Default	Edited	3.56	3.56		
Default	Edited						
3.56	3.56						
		Q _{BAR} for total site area (l/s):	<table border="1"> <tr> <th>Default</th> <th>Edited</th> </tr> <tr> <td>0.84</td> <td>0.84</td> </tr> </table>	Default	Edited	0.84	0.84
Default	Edited						
0.84	0.84						
		Q _{BAR} for net site area (l/s):	<table border="1"> <tr> <th>Default</th> <th>Edited</th> </tr> <tr> <td>0.84</td> <td>0.84</td> </tr> </table>	Default	Edited	0.84	0.84
Default	Edited						
0.84	0.84						

Design criteria			
Climate change allowance factor:	1.4		
Urban creep allowance factor:	1.1		
Volume control approach:	Use long term storage		
Interception rainfall depth (mm):	5		
Minimum flow rate (l/s):	2		

Site discharge rates		Estimated storage volumes									
1 in 1 year (l/s):	<table border="1"> <tr> <th>Default</th> <th>Edited</th> </tr> <tr> <td>2</td> <td>2</td> </tr> </table>	Default	Edited	2	2	Attenuation storage 1/100 years (m³):	<table border="1"> <tr> <th>Default</th> <th>Edited</th> </tr> <tr> <td>573</td> <td>573</td> </tr> </table>	Default	Edited	573	573
Default	Edited										
2	2										
Default	Edited										
573	573										
1 in 30 years (l/s):	<table border="1"> <tr> <th>Default</th> <th>Edited</th> </tr> <tr> <td>2.1</td> <td>2.1</td> </tr> </table>	Default	Edited	2.1	2.1	Long term storage 1/100 years (m³):	<table border="1"> <tr> <th>Default</th> <th>Edited</th> </tr> <tr> <td>62</td> <td>62</td> </tr> </table>	Default	Edited	62	62
Default	Edited										
2.1	2.1										
Default	Edited										
62	62										
1 in 100 year (l/s):	<table border="1"> <tr> <th>Default</th> <th>Edited</th> </tr> <tr> <td>3</td> <td>3</td> </tr> </table>	Default	Edited	3	3	Total storage 1/100 years (m³):	<table border="1"> <tr> <th>Default</th> <th>Edited</th> </tr> <tr> <td>636</td> <td>636</td> </tr> </table>	Default	Edited	636	636
Default	Edited										
3	3										
Default	Edited										
636	636										

Table 5 – Estimated attenuation calculations.

WTFR-FRA-2024/09/Q04

Figure 11 below shows a proposed schematic drainage layout for the development site, providing the required 636m³ of attenuation storage.

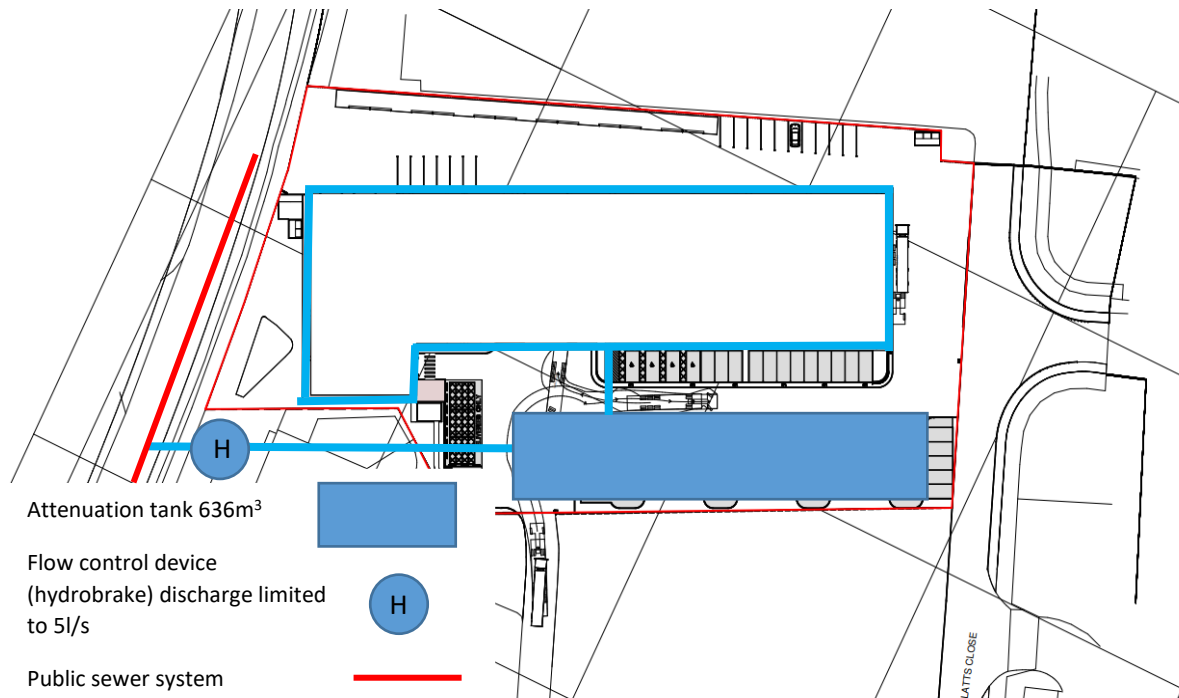


Figure 11 – Drainage layout.

7. Hierarchy of disposing surface water

The Planning Practice Guidance and part H of the Building Regulations state that “generally, the aim should be to discharge surface run off as high up the following hierarchy of drainage options as reasonably practicable:

- into the ground (infiltration);
- to a surface water body;
- to a surface water sewer, highway drain, or another drainage system;
- to a combined sewer”.

7.1 Infiltration

Due to the limited amount of permeable ground infiltration is not a viable option for disposal of surface water for this development.

7.2 Surface Water Body

There are no watercourses within the immediate vicinity of the development.

7.3 Surface Water or Combined Sewer

It is assumed that a public surface water or combined sewer is available and serves the surrounding buildings. As such, it is recommended that surface water is discharged to the public sewerage system.

8. Use of SuDS

The NPPF, Planning Practice Guide and the Ministerial Statement all look at the use of SuDS as a priority to aid the disposal of surface water from new developments. Below is a list of different SuDS options and their suitability for this development.

An effective SuDS scheme controls both runoff quantity and quality, and can provide amenity value. A range of different SuDS techniques are described below.

Source Control

Rain water harvesting / water butts

This is the direct capture of runoff on site. Rainfall runoff can be extracted for domestic use e.g. flushing toilets. Simple devices such as water butts can be installed for a relatively low cost and are easy to construct, install and operate.

Permeable Paving

Permeable paving provides a surface suitable for pedestrian and/or vehicular traffic, while allowing rainwater to infiltrate through the surface and into the underlying layers. The water is temporarily stored before infiltration into the ground (which may not be appropriate at this location), reuse, or discharge into a watercourse or other drainage system.

The CIRIA document C753 – The updated SuDS Manual states that permeable paving offers such advantages as “suitable for installation in high density development”, “low maintenance” and “eliminates surface ponding and surface ice”.

Green Roofs

Green roofs comprise a multi-layered system that covers the roof of a building or podium structure with vegetation cover/landscaping/permeable car parking over a drainage layer. They are designed to intercept and retain precipitation, reducing the volume of runoff and attenuating peak flows.

The advantages of green roofs are that they can be applied in high density developments, require no additional land take, improve air quality and can insulate buildings against temperature extremes.

Infiltration devices

Soakaways

Soakaways are square or circular excavations, with filled with rubble or lined with brickwork, pre-cast concrete or polyethylene rings/perforated storage structures surrounded by granular backfill. Some of the advantages for these devices are that they take a minimal land take, provide groundwater recharge and are generally easy to construct and operate. However, it must be stressed that these are not suitable for poor draining soils.

Infiltration basins

Infiltration basins are vegetated depressions designed to store runoff and infiltrate it gradually into the ground. The advantages of using infiltration basins include they are simple and cost-effective to construct, they reduce the volume of runoff from a drainage area and can be very effective at pollutant removal via filtering through the soils.

Conveyance

Swales

Swales are linear vegetated drainage features in which surface water can be stored or conveyed. They can be designed to allow infiltration, where appropriate. Roadside swales can replace conventional gullies and drainage pipes.

Advantages of using swales are that they are easy to incorporate into landscaping, they reduce runoff rates and volumes and that maintenance can be incorporated into general landscape management.

Rills and canals

Rills and canals are open surface water channels with hard edges. They can have a variety of cross sections to suit the urban landscape and can also be planted to provide water treatment. In dense urban developments where space can be at a premium they are an effective way of providing SUDS and can also act as pre-treatment to remove silt before water is conveyed into further SUDS features.

Attenuation features

Detention basins

Detention basins are surface storage basins or facilities that provide flow control through attenuation of stormwater runoff. These according to The CIRIA document C697 – The SuDS Manual “can be used where the groundwater is vulnerable, if lined”, “simple and easy to construct” and “easy to maintain”.

Ponds

Ponds can provide both storm water attenuation and treatment. They are designed to support emergent and submerged aquatic vegetation along their shoreline. Runoff from each rain event is detained and treated in the pool.

Attenuation is required to control runoff quantity, and could be provided by subsurface storage or, if the levels are suitable and land is available, pocket wetlands. To control the quality of runoff, other components such as filter trenches and permeable paving could be provided upstream of the attenuation to treat the surface water.

Summary of SuDS for the development

The NPPF, Planning Practice Guide and the Ministerial Statement all consider the use of SuDS as a priority to aid the disposal of surface water from new developments and the proposed drainage arrangements should consider the use of SuDS, where appropriate.

It is proposed that permeable paving is used within the development. Measures such as rain water harvesting units, water butts and rainwater gardens are also encouraged, in order to minimise surface water runoff. Due to the limited site constraints and the proximity of adjacent buildings, measures such as detention basins and ponds are not considered viable in this instance.

9. Management of flood risk

9.1 Fluvial/Tidal

The analysis of flooding from fluvial and tidal sources shows that the building is in Flood Zone 3 and hence is at a risk of flooding from events greater than 1 in 100 (1%) year for fluvial events and 1 in 200 year (0.5%) for tidal events.

Developments used for industrial units are classified as being Less Vulnerable development within Table 2 of the Planning Practice Guidance. Less Vulnerable developments are acceptable within Flood Zone 3.

The predicted 1 in 200 year level is 5.98mAOD. No climate change levels have been presented with the modelled outputs.

It is recommended for the finished floor level to be as high as possible.

Due to the vast area of floodplain, compensatory storage will not be required.

To mitigate against flooding it is recommended that flood resistance and resilience measures are incorporated in the development. Suitable measures are specified in section 9.4 of this report.

It is also recommended that the residents of the property register for the EA Flood Warning Service, which is available in the area and develop a flood plan that may be implemented in the event of extreme flooding. Details of a flood plan are set out in section 9.4 of this report.

9.2 Surface Water

The development site is described as being at low risk from surface water flooding, which means that the flood risk is between 1 in 1000 (0.1%) and 1 in 100 (1%).

It is assumed that a public surface water or combined sewer is available and serves the surrounding buildings. As such, it is recommended that surface water is discharged to the public sewerage system.

The calculations show that 636m³ of attenuation is required.

The development will not increase the risk of flooding elsewhere from surface water sources.

Appropriate SuDS features and measures such as permeable paving are proposed to be incorporated within the development to minimise surface water discharges.

As such, the proposed development will not increase the risk of flooding elsewhere from surface water sources.

9.3 Flood Resistance and Resilience Measures

It is proposed that the works incorporate flood resilience and resistance measures. This would ensure that any flooding could be mitigated against. Such measures could include:

- External ventilation outlets, utility points and air bricks fitted with removable waterproof covers;
- Ground level electrical main ring run from higher level; and on separately switched circuit from first floor;
- Electrical incomer and meter situated at higher level;
- Boilers, control and water storage / immersion installed at higher level;
- Gas meter installed at higher level;
- Plumbing insulation of closed-cell design;
- Non-return valves fitted to all drain and sewer outlets;
- Manhole covers secured;
- Anti-siphon fitted to all toilets;

9.4 Flood plan

As the development is situated in Flood Zone 3 it would be prudent for a flood warning and evacuation plan to be set up and implemented post development. This plan would include owners of the building signing up to the Environment Agency flood warning service.

The flood warning service has three types of warning that will help you to prepare for flooding and take action.

Flood Warning	Flood Alert	Flood Warning	Severe Flood Warning
			
What it means?	Flooding is possible. Be prepared.	Flooding is expected. Immediate action required.	Severe flooding. Danger to life.
When it's used?	Two hours to two days in advance of flooding.	Half an hour to one day in advance of flooding.	When flooding poses a significant threat to life.
What to do?	Be prepared to act on your flood plan. Prepare a flood kit of essential items. Monitor local water levels and the flood forecast on our website.	Move family, pets and valuables to a safe place. Turn off gas, electricity and water supplies if safe to do so. Put flood protection equipment in place.	Stay in a safe place with a means of escape. Be ready should you need to evacuate from your home. Co-operate with the emergency services. Call 999 if you are in immediate danger.

Recommended Flood Plan:

Before a flood

- Find out if you are at risk of flooding;
- Find out if you can receive flood warnings;
- Prepare and keep a list of all your contacts to hand or save them on your mobile phone/tablet;

- Think about what items you can move now and what you would want to move to safety during a flood such as pets, cars, furniture and electrical equipment;
- Know how to turn off gas, electricity and water supplies;
- Prepare a flood kit of essential items and keep it handy. It can include copies of important documents, a torch, a battery-powered or wind-up radio, blankets and warm clothing, waterproofs, rubber gloves and a first aid kit including all essential medication.

On receipt of a flood warning

- Tune into your local radio station on a battery or wind-up radio;
- Fill jugs and saucepans with water;
- Grab your already prepared flood kit;
- Collect blankets, torch, first aid kit, medication and food;
- Move important documents, personal items, valuables and lightweight belongings upstairs or to high shelves;
- Raise large items of furniture, or put them in large bags if you have them;
- Move people, outdoor belongings, cars and pets to higher ground;
- Switch off water, gas and electricity at mains when water is about to enter your home. Do not touch sources of electricity when in standing water;
- Fit flood protection products, if you have them, for example flood boards, airbrick covers and sandbags;
- If you do not have non-return valves fitted, plug water inlet pipes with towels or cloths; Know your means of escape;
- Listen to the advice of the emergency service and evacuate if told to do so;
- Avoid walking or driving through flood water. 300mm of fast flowing water can knock over an adult and two feet of water can move a car.

After a flood

- If you have flooded, contact your insurance company as soon as possible;
- Take photographs and videos of your damaged property as a record for your insurance company;
- If you don't have insurance, contact your local authority for information on grants and charities that may help you;
- Flood water can contain sewage, chemicals and animal waste. Always wear waterproof outdoorwear, including gloves, wellington boots and a face mask;
- Have your electrics, central heating and water checked by qualified engineers before switching them back on.

10. Conclusions

The analysis of flooding from fluvial and tidal sources shows that the building is in Flood Zone 3 and hence is at a risk of flooding from events greater than 1 in 100 (1%) year for fluvial events and 1 in 200 year (0.5%) for tidal events.

Developments used for industrial units are classified as being Less Vulnerable development within Table 2 of the Planning Practice Guidance. Less Vulnerable developments are acceptable within Flood Zone 3.

The predicted 1 in 200 year level is 5.98mAOD. No climate change levels have been presented with the modelled outputs.

It is recommended for the finished floor level to be as high as possible.

Due to the vast area of floodplain, compensatory storage will not be required.

To mitigate against flooding it is recommended that flood resistance and resilience measures are incorporated in the development.

The development site is described as being at low risk from surface water flooding, which means that the flood risk is between 1 in 1000 (0.1%) and 1 in 100 (1%).

It is assumed that a public surface water or combined sewer is available and serves the surrounding buildings. As such, it is recommended that surface water is discharged to the public sewerage system.

The calculations show that 636m³ of attenuation is required.

The development will not increase the risk of flooding elsewhere from surface water sources.

Appropriate SuDS features and measures will be incorporated within the development to minimise surface water discharges.

As such, the proposed development will not increase the risk of flooding elsewhere from surface water sources.

The development is not at risk from reservoir failure.

It is recommended that users of the site register for the EA Flood Warning Service, which is available within the area and aims to give a minimum 2 hours advance notification of potential flooding, giving adequate time to implement safety procedures. This would form the basis of developing a flood plan that may be implemented in the event of flooding.

Based on the likely flooding risk, it is considered that through the use of planning conditions, the proposed development can be operated safely in flood risk terms, without increasing flood risk elsewhere and is therefore appropriate development in accordance with the NPPF.

