

General Notes

1.

All dimensions are in metres unless otherwise stated.
2.

All levels are in metres.
3.

This drawing is to be read in conjunction with all relevant Engineers and Architect's drawings, Specifications, Reports and Engineering Details.
4.

Do not scale from this drawing.

Health, safety & the environment

In accordance with the Construction (Design and Management) Regulations 2015, the designs and details on this drawing have been the subject of a Designers Risk Assessment, to identify risks in the construction, use, or demolition of the scheme.

It is not considered necessary for Designers to highlight obvious and/or common risks (such as deep excavations, manual handling and working around heavy plant) which Contractors should be familiar with, and be able to control by good management and site practice.

So far as is reasonably practicable, the risks inherent in the design have been eliminated. Where it has been considered that elimination of a risk (or part of a risk) is not reasonably practicable, it has been reduced.

This drawing has been based/developed using the following external drawings					
Type	Company	Drawing date	Drawing title	Date received	Rev
Site Layout	JGA Architects	02.05.2023	23001 1000-P02 GA Site Layout	02.05.2023	P02
Topographical survey	EMP Surveys LTD	July 2022	1021_Pinchbeck Topographical Survey_Final	04.01.2023	P05
Agreement			Approval Granted		
S23 (Land drainage consent)			NOT APPROVED		
S104 (Adoption of sewers)			NOT APPROVED		
S278 (Works in existing highway)			NOT APPROVED		
S106 (Foul connection)			Approved 23.05.2023		

ALL WORKS WITHIN THE ADOPTABLE PUBLIC HIGHWAY SHALL CONFORM TO THE CURRENT "LINCOLNSHIRE DEVELOPMENT ROADS & SUSTAINABLE DRAINAGE DESIGN GUIDE" AND "DEVELOPMENT ROAD AND SUSTAINABLE DRAINAGE SPECIFICATION AND CONSTRUCTION" PUBLICATIONS IN FORCE IN THE COUNTY AT THE TIME OF CONSTRUCTION.

ALL ADOPTABLE DRAINAGE WORKS TO BE IN ACCORDANCE WITH CODES FOR ADOPTION DESIGN & CONSTRUCTION GUIDANCE

DRAWINGS HAVE NOT BEEN APPROVED, UNTIL THE DRAWINGS ARE APPROVED THE DESIGNS AND DETAILS SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE.

ANY WORKS UNDERTAKEN PRIOR TO TECHNICAL APPROVAL IS ENTIRELY AT THE CONTRACTORS' RISK.

Site Wide Build-Up

Levels across the site have been lifted significantly above existing ground levels to allow for the following:

- To allow surface water drainage to drain to the existing ditch at the southern side of the site by gravity.
- To avoid deep foul drainage required to allow the site to drain to the existing AW/manhole by gravity (alternative solution is to pump foul fouls via a rising main)
- To limit excavations required for drainage and services in the unstable ground and Made Ground, where high groundwater is present.

A geogrid will be required under all road, footway, parking areas and patios due to low strength soils (CBR values have been shown to range from 5.2% to 0.3%) and deep Made Ground. Geogrid to be designed by a specialist.




Allowance to be made for Geogrid to extend below all manholes and inspection chambers, and also to cover POS and garden areas where there is a risk of future settlement. Fill material specification also to be advised by Geotechnical Engineer to reduce risk of settlement - allowance to be made for removal of Made Ground material.

⚠

Deep Made Ground present within area of proposed detention basin and plots 13-22 (exact extents of Made Ground unknown). Constant inflow of groundwater and excavation collapse encountered in this area during ground investigations. There is also the risk of trench instability and high groundwater across the site. Excavations have been limited where possible by raising site levels.

Geogrid required - design to be undertaken by a specialist. Allowance to also be made for removal of Made Ground.

Prior to commencing works the Contractor is to familiarise themselves with the ground conditions detailed within the Elemental GI Ltd Phase II Geo-Environmental Investigation Report (Jan 2022, Ref: E21142/2/1) and the findings of JPP Geotechnical additional ground investigations undertaken in February 2023. The Contractor is to ensure suitable safe working practices are followed in accordance with current best practice. The Contractor is to ensure the excavations are suitably managed with supports or benched to prevent collapse, and de-watering / pump equipment in place where required. Excavations are not to be left open for long periods

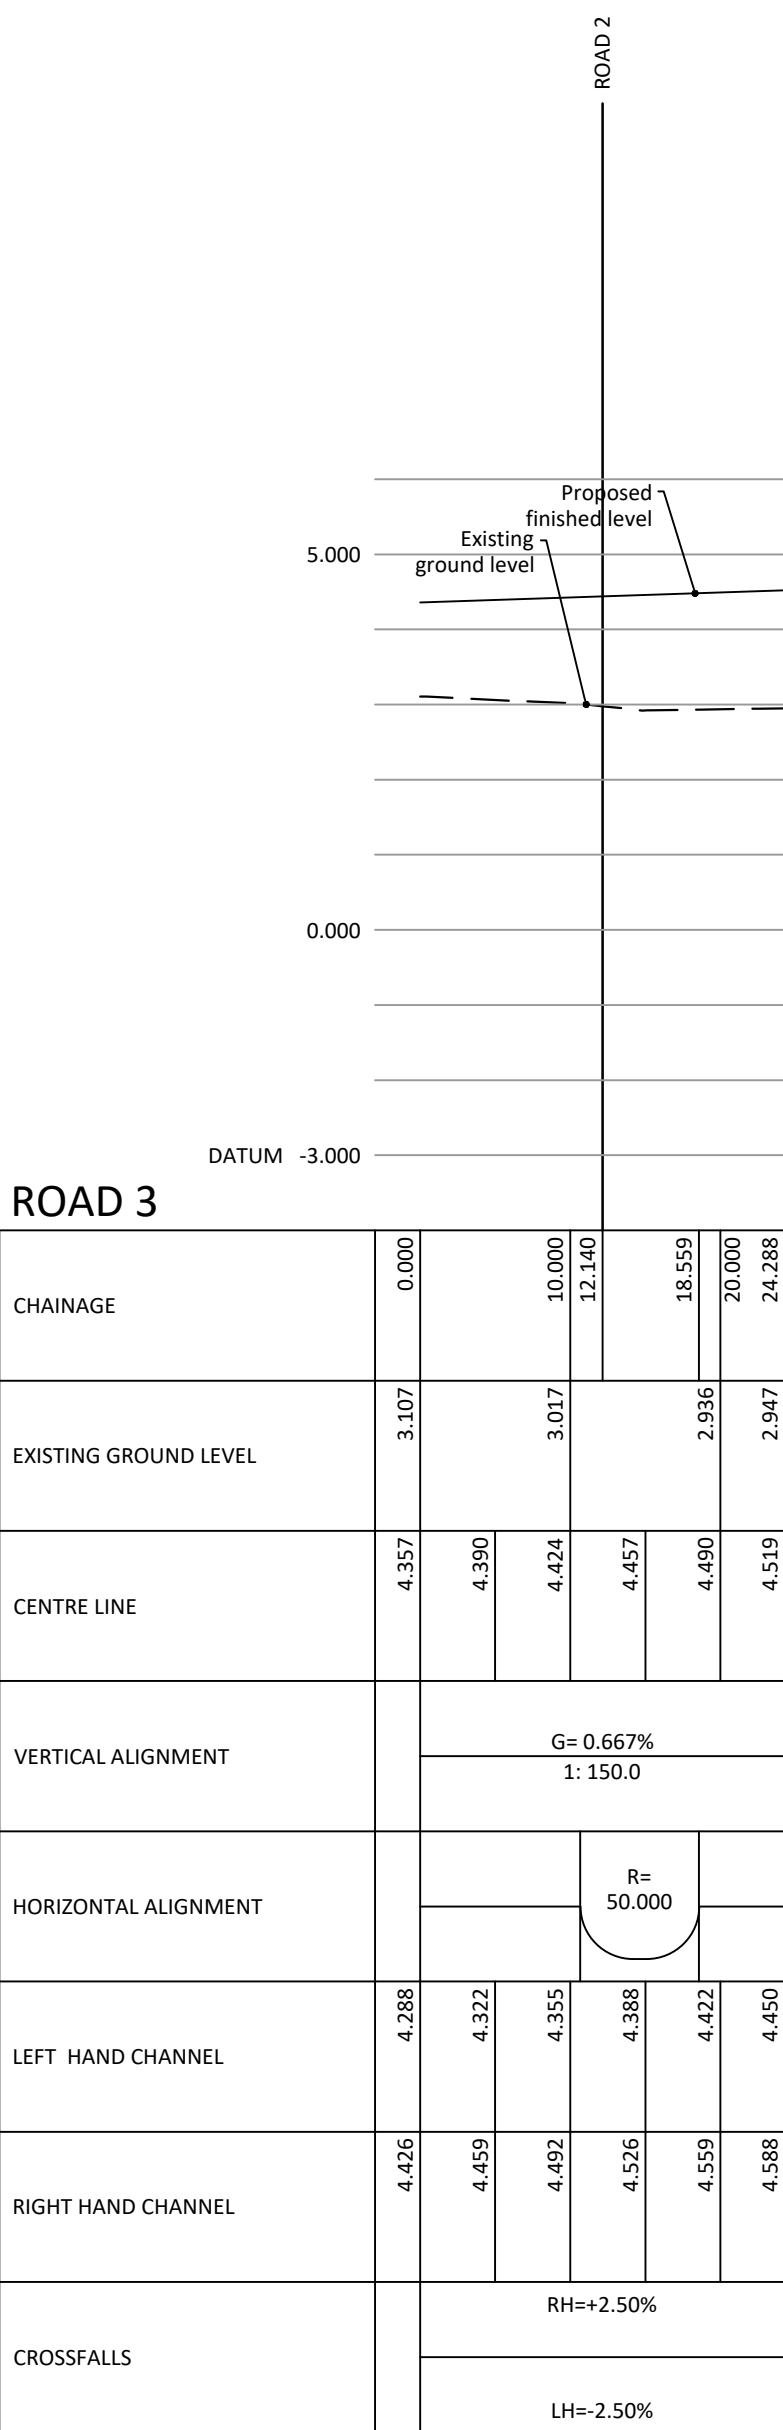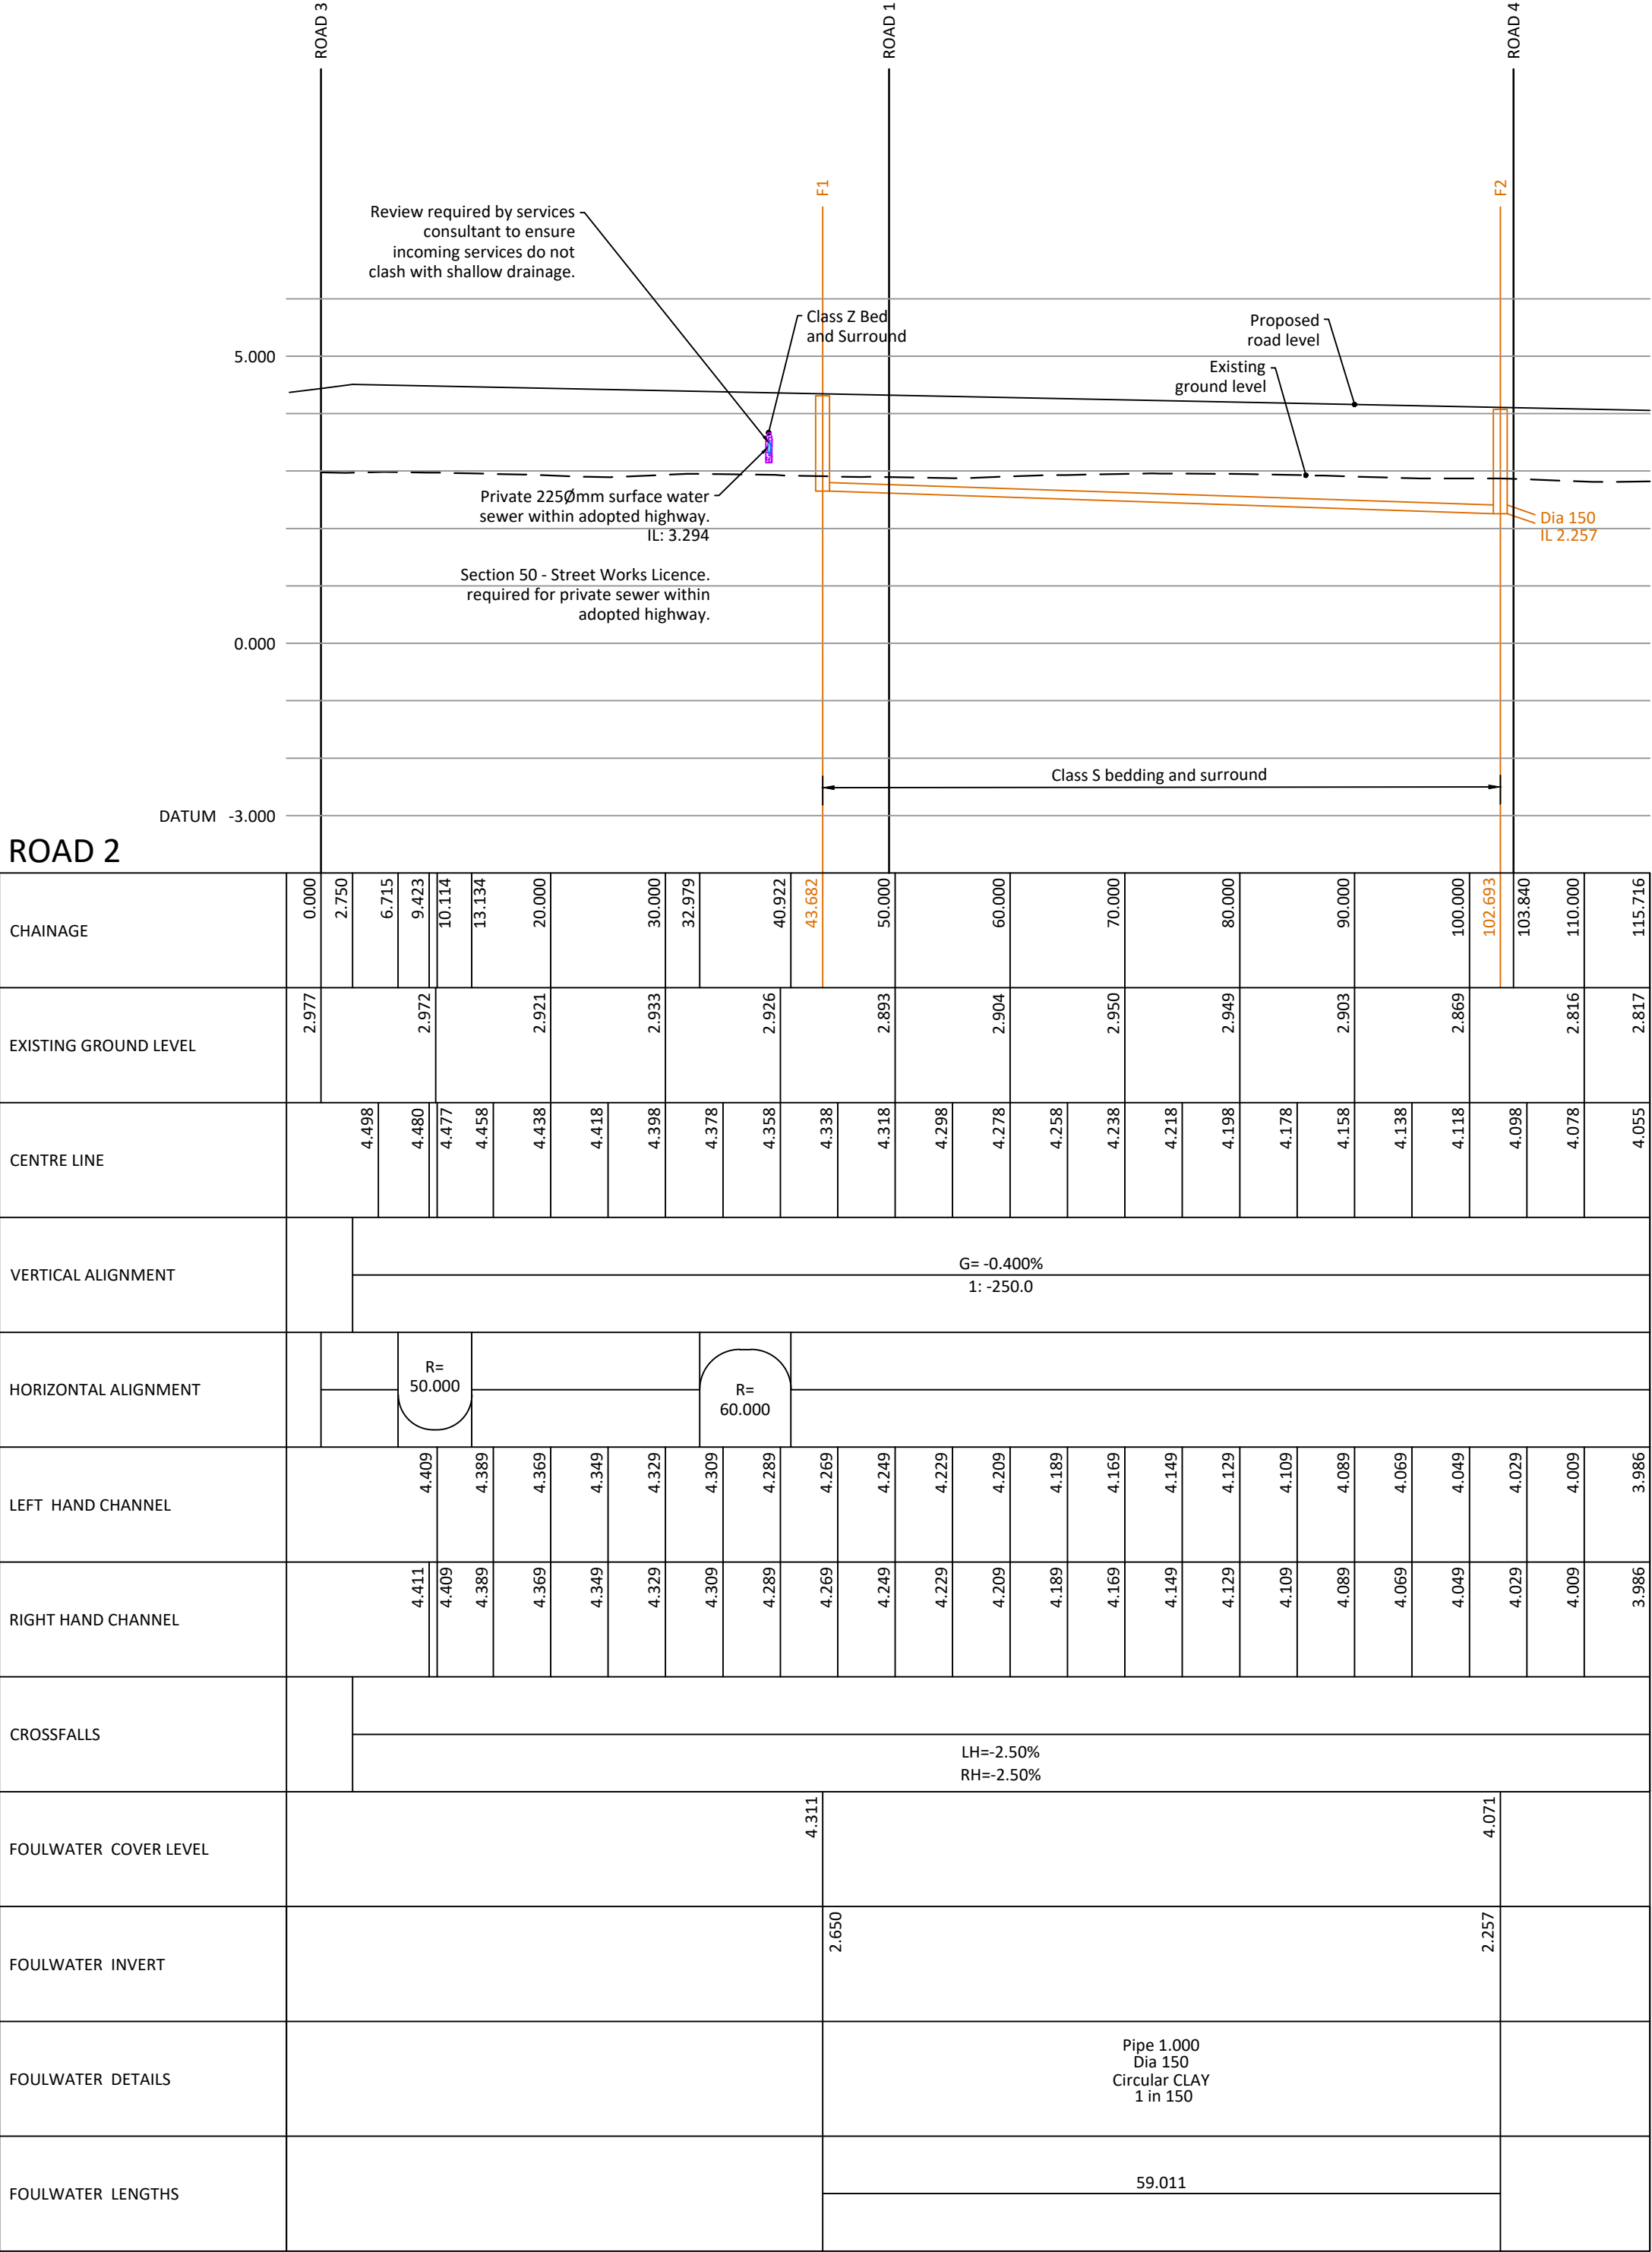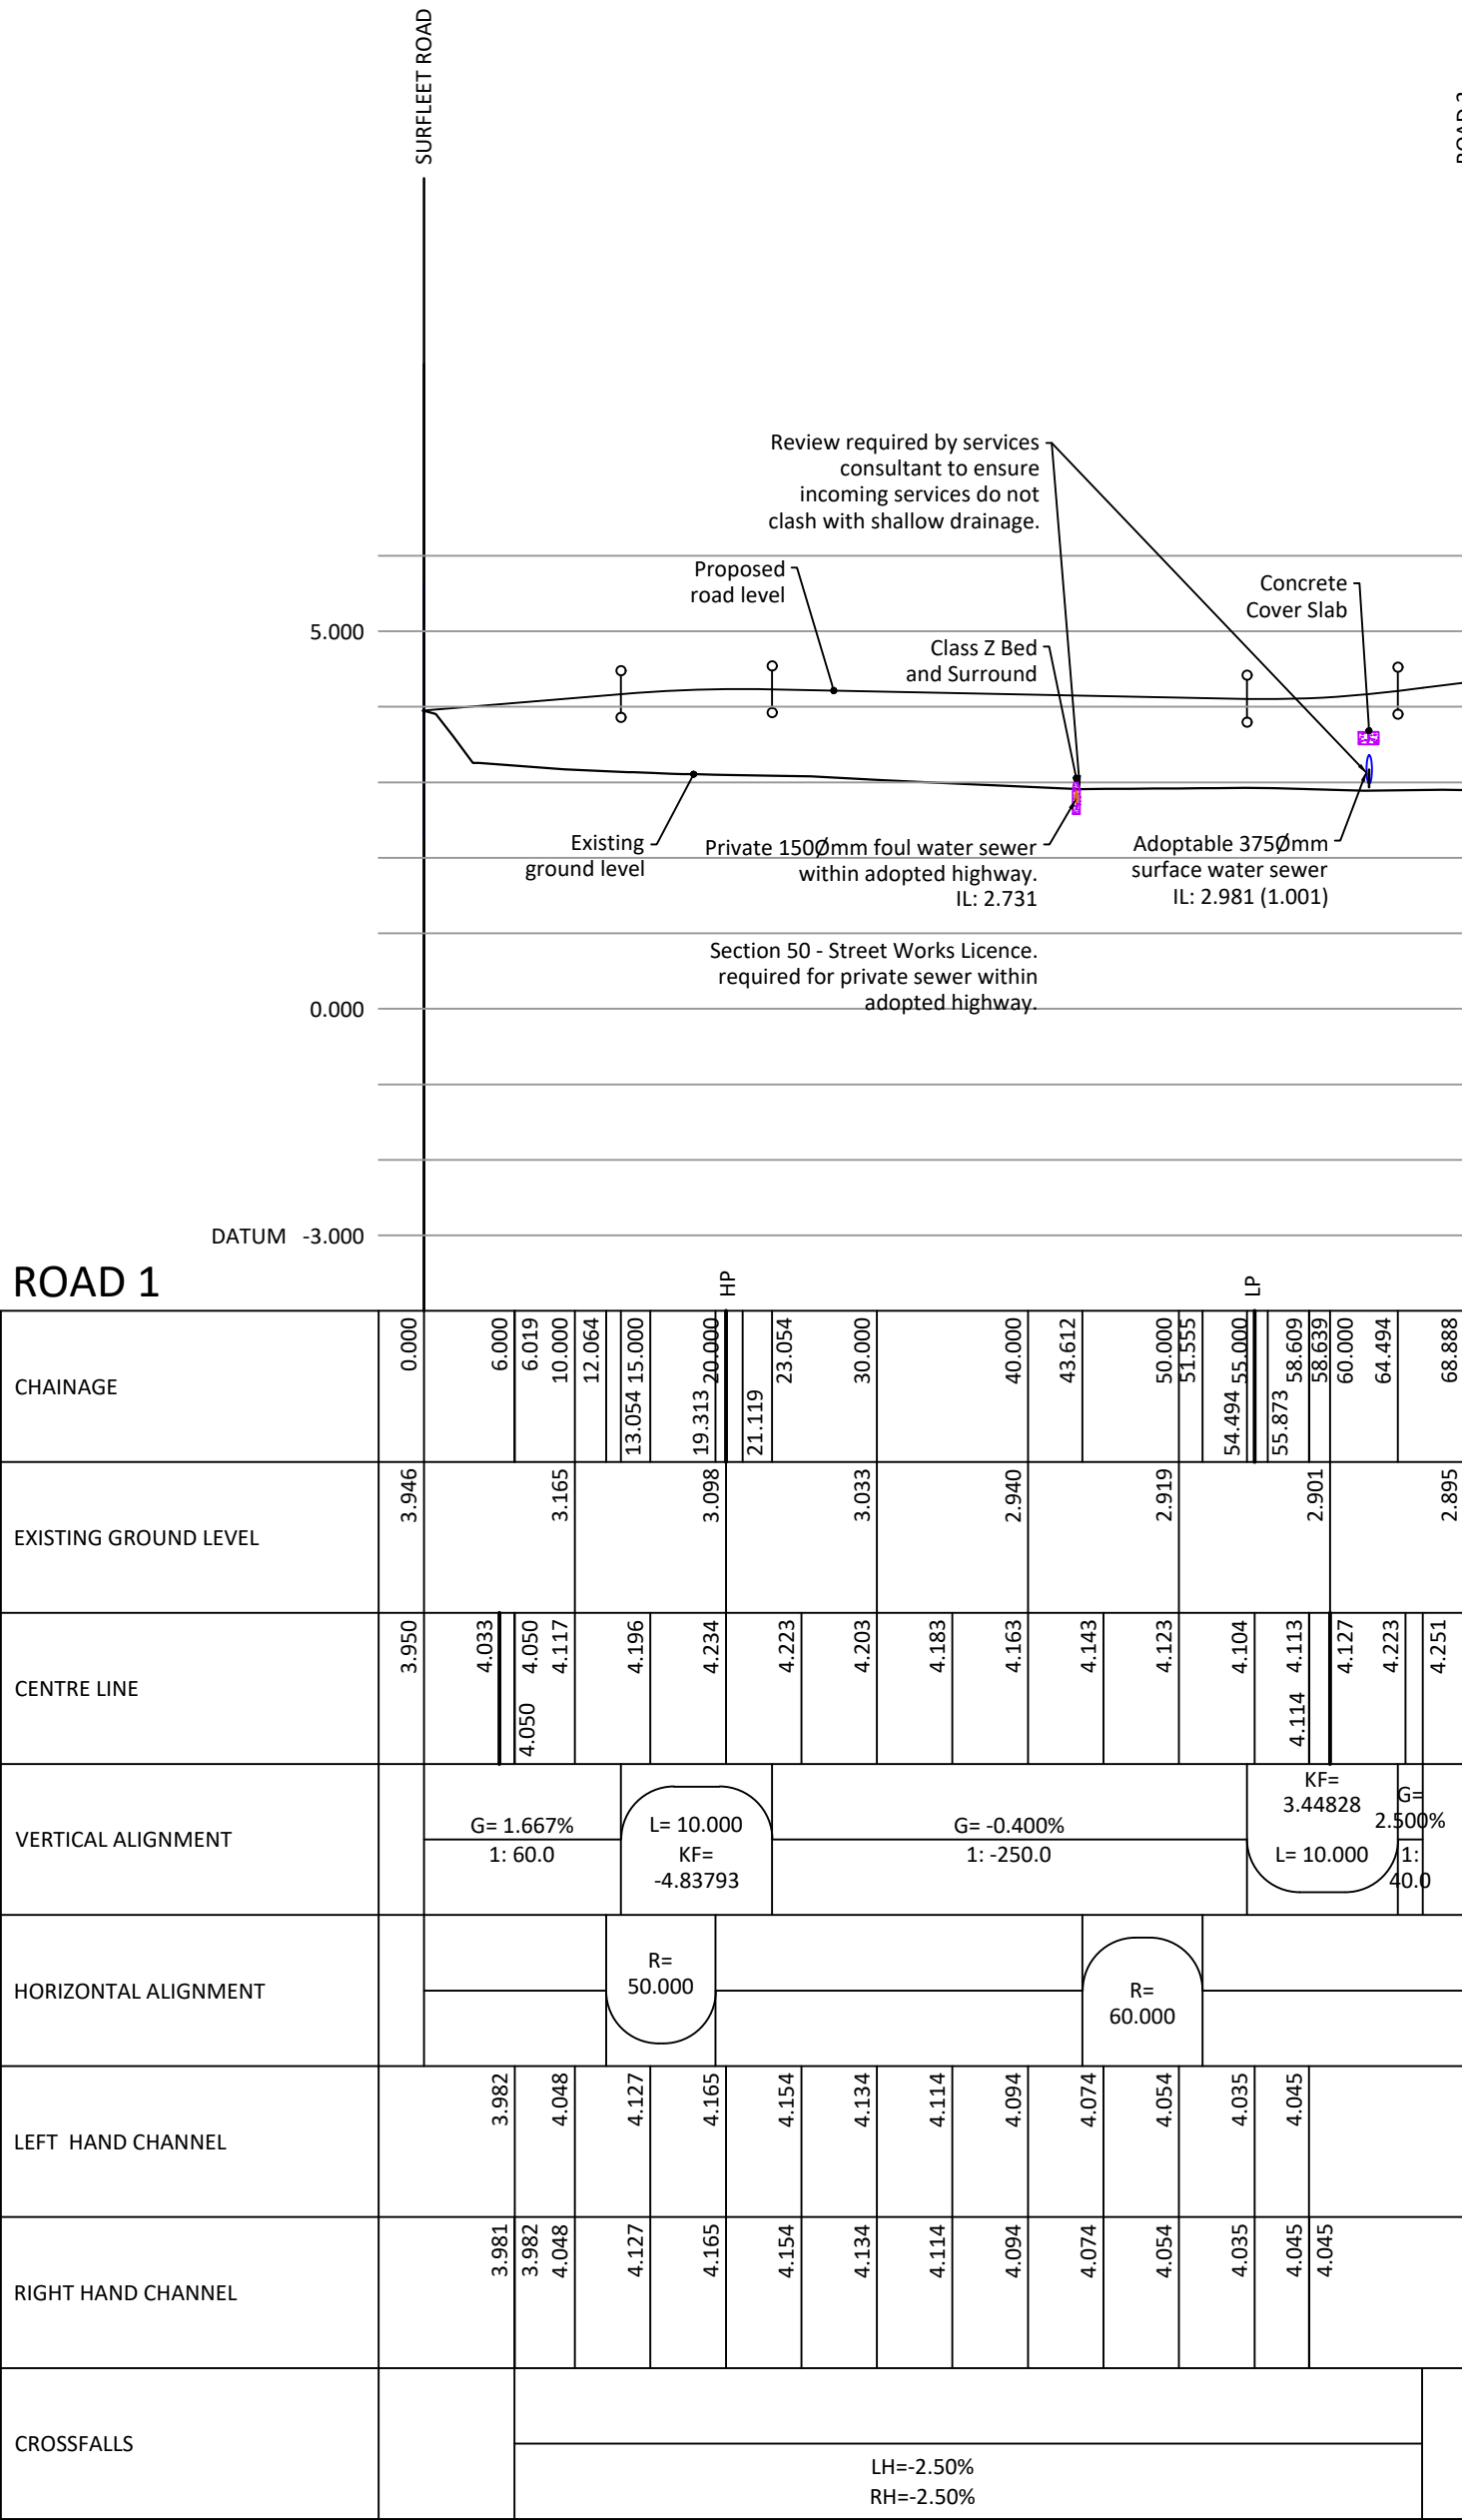

- ☐

Northampton
4 Hordstone Way, Brinkworth,
Northampton, NN6 9UD
T: 01604 781811
- ☐

Warwick
Unit 12A, Warwick Innovation Centre,
Warwick Technology Park, Gallows Hill, Warwick, CV34 6UW
T: 02476 100530
- ☒

Milton Keynes
Suite B2A, Denbigh Business Park, 23 First Avenue,
Denbigh, Milton Keynes, MK1 1DN
T: 01908 889433
- ☐

Poole
Suite 8, Branksome Park House, Branksome Business Park,
Bourne Valley Road, Poole, Dorset, BH12 1ED
T: 01202 540888

E: mail@jppuk.net
W: jppuk.net

- Infrastructure Design

• Structural Engineering

• Development Planning
- Geotechnical & Environmental

• Surveying

• Professional Advice

Rev A Road 1 long section amended to suit Road level changes

Drawn By:	AD	Client	Burmor Construction
Chkd By:	LC	Project	Land East of Surfleet Road Pinchbeck
Scale @ A1:	NTS	Title	Longitudinal Sections (Sheet 1)
Date:	February 2023		
Status:	FOR TECHNICAL APPROVAL		
Project No.:	26043	Drawing No:	101 (1)
Rev:	A		

