

NOTES:

All workmanship is to be in accordance with the latest amendment of the relevant section of BS 8000, to the extent that recommendations define quality of finished work. All materials, products and systems are to be installed and fixed in strict accordance with the latest manufacturers written instructions, in line with the requirements of any relevant British Board of Agreement Certificates, British or European Standards and the section of BS 8000 applicable to that trade.

All dimensions must be checked on site prior to commencement of related works.

Any discrepancies should be notified to the design office immediately.

CONSTRUCTION [DESIGN AND MANAGEMENT] REGULATIONS 2015:

Design, Construction or Residual Risks beyond the expected knowledge of a competent Contractor, End-User/Operator, and/or residual risks that cannot be entirely mitigated through design are identified on this drawing. This drawing should be read alongside any project specific Design Risk Assessments prepared by CDG and/or other designers (including subcontractor or specialist designers).

DESIGN RISK
STEEL WORK UNEXPOSED RESULTING IN UNCOORDINATED GRIDS EXISTING STEELWORK ON GL B TO BE EXPOSED ON SITE WITH SIZES AND SETTING OUT DIMENSIONS TO BE CONFIRMED BACK TO ARCHITECT / ENGINEER TO FINALISE GRID LINES.


DESIGN RISK
UNKNOWN BELOW GROUND SERVICES AREA OF EXTENSION TO BE SURVEYED FOR UNDERGROUND SERVICES PRIOR TO ANY EXCAVATION WORKS BEING UNDERTAKEN. ANY SERVICES FOUND TO BE ISOLATED / REMOVED / RELOCATED AS REQUIRED PRIOR TO COMMENCEMENT OF WORKS

DESIGN RISK
GRIDLINE SETTING OUT GRIDLINES B & C SUBJECT TO FURTHER SITE INVESTIGATION OF EXISTING STEELWORK POSITION AND EXTENT OF EXISTING FOUNDATIONS.


RESIDUAL RISK
FACADE CLEANING AND MAINTENANCE BUILDING FACADE TO BE CLEANED FROM GROUND LEVEL USING EXTENDABLE BOOM REACH AND WASH SYSTEM. PERIODIC MAINTENANCE AND INSPECTION OF CLADDING TO BE UNDERTAKEN BY SUITABLY QUALIFIED PERSONNEL USING MOBILE ELEVATED WORKING PLATFORM (MEWP) OR MEANS OF TEMPORARY SCAFFOLDING IN ACCORDANCE WITH MANUFACTURERS REQUIREMENTS.

NOTES:

FLOOR FINISHES TO BE SUPPLIED AND INSTALLED BY CLIENT.
SERVICES MOUNTED EXTERNALLY ON THE EASTERN ELEVATION ARE TO BE MOVED BY THE CLIENT PRIOR TO WORKS STARTING ON SITE.

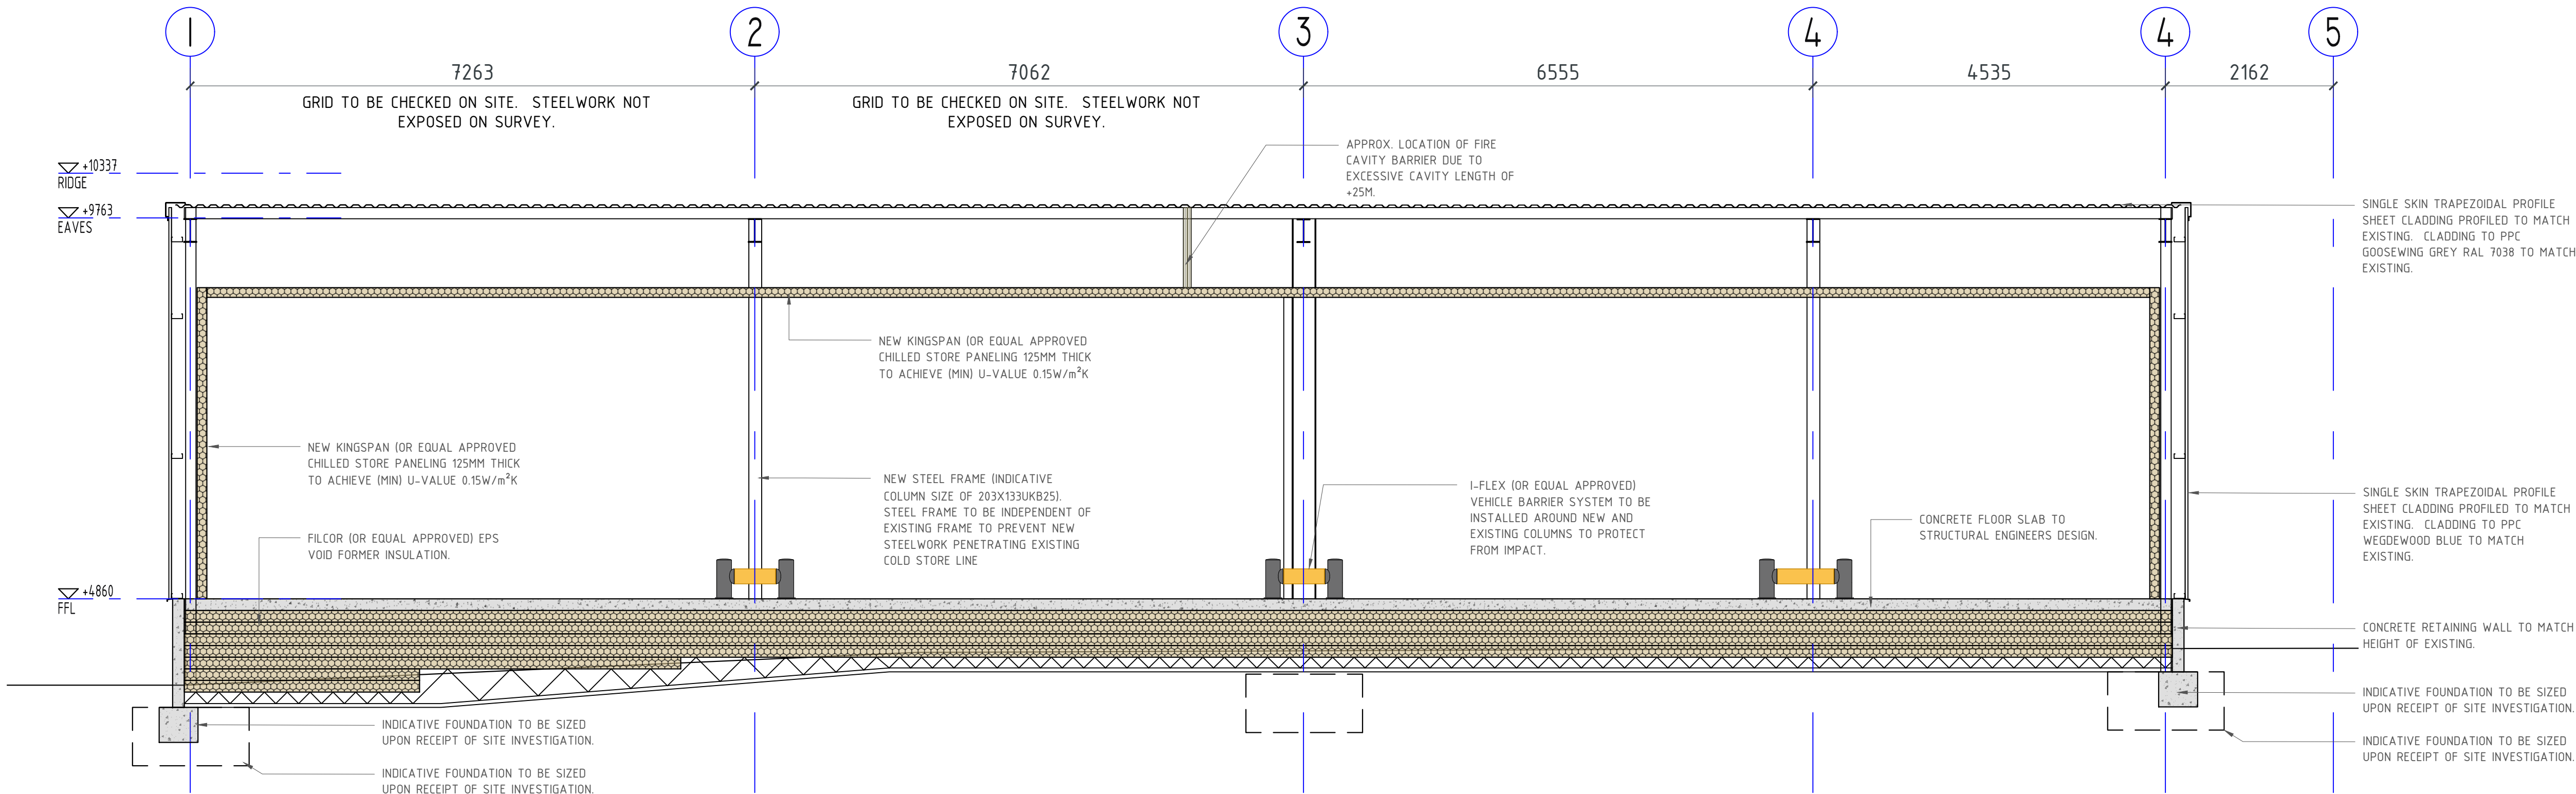

SECTION A-A SCALE 1:50@A1

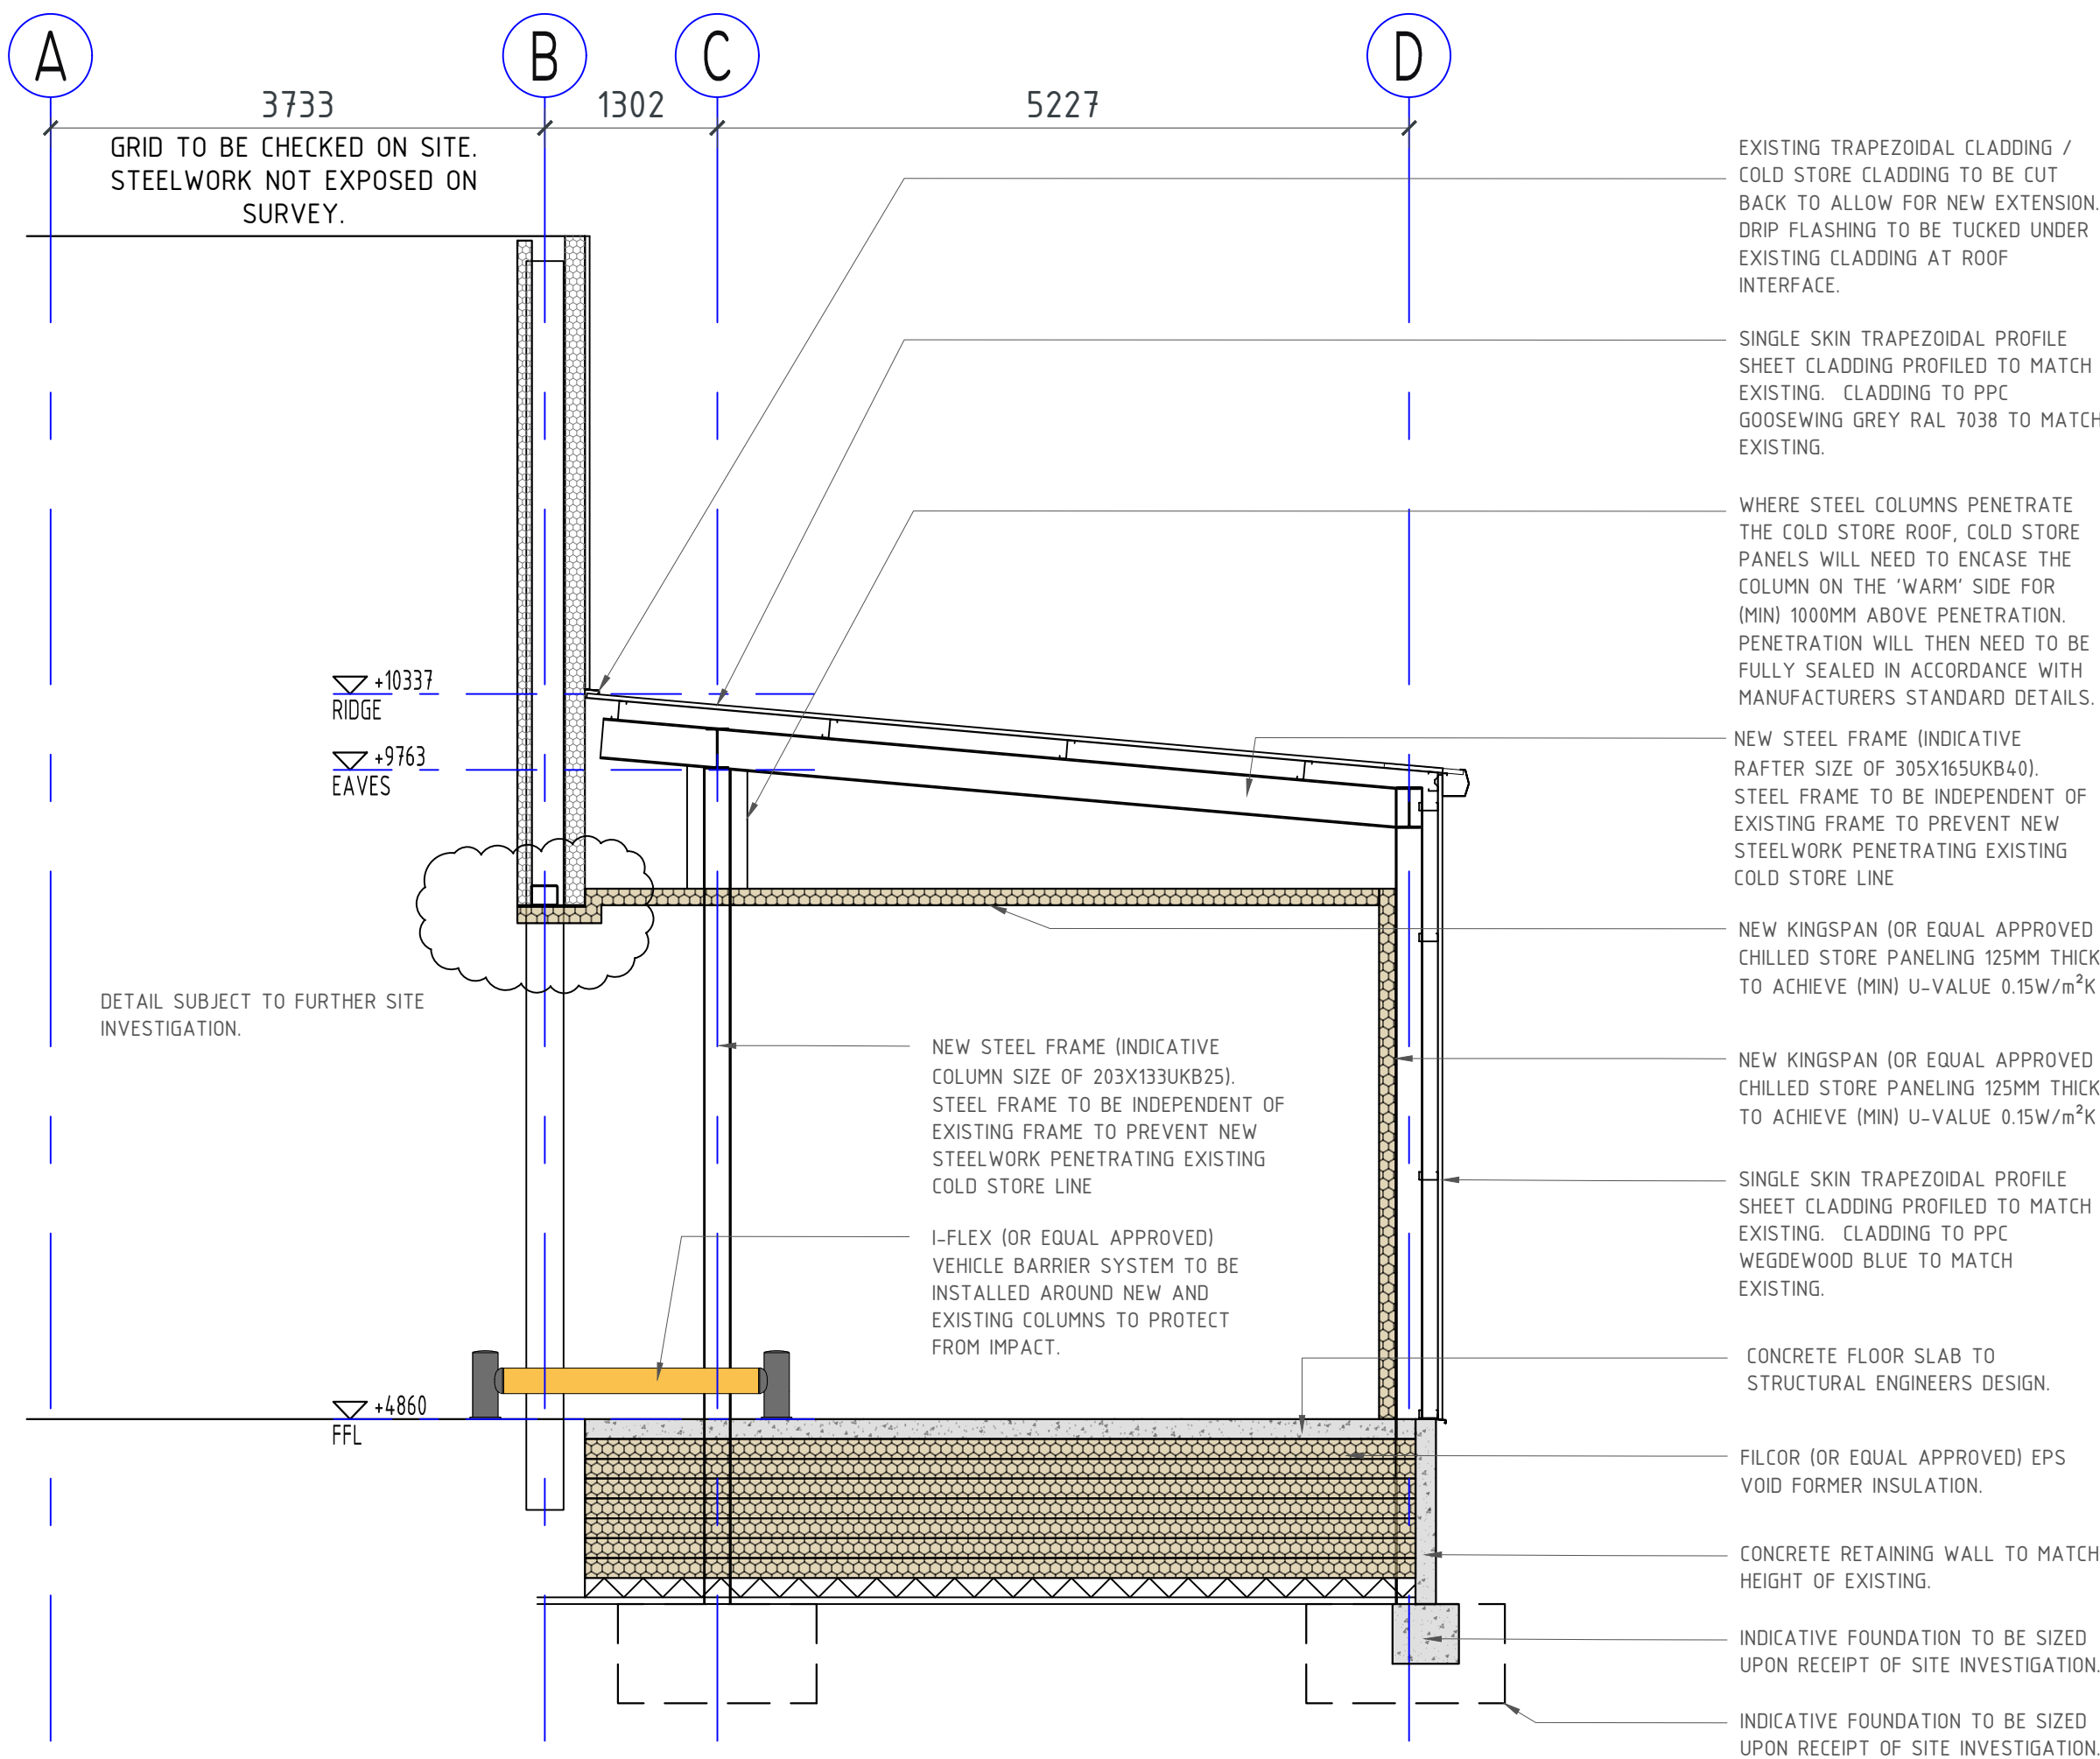

SECTION B-B SCALE 1:50@A1

P01	Foundation note ammended on section A-A			11.04.21	CDG	AG
	no	revisions		date	source	drawn

COMMENT / APPROVAL

project
GREENCELL, SPALDING
DESPATCH EXTENSION


carter design group

drawing title
AS PROPOSED
GENERAL ARRANGEMENT SECTIONS

drawn
date: 09.06.21

checked
date: 09.06.21

scale: AS SHOWN

project
8432.CDG.XX.XX.DR.A.1300

originator
AG

volume
XX

level
XX

type
DR.A

number
1300

status
Revision

S4.P01

VICTORY PARK, LONDON ROAD, ATTLEBOROUGH, NORFOLK, NR17 1ZA, TEL: 01553 787788 E-MAIL: design@carter.co.uk