

**FLOOD RISK ASSESSMENT
FOR COMMERCIAL DEVELOPMENT AT
WARDENTREE LANE, SPALDING**

FINAL REPORT

ECL1633/GR MERCHANT LTD

DATE SEPTEMBER 2025

ELLINGHAM CONSULTING LTD

Email: tim@ellinghamconsulting.co.uk

CONTENTS

1.0 INTRODUCTION

2.0 SITE LOCATION AND DESCRIPTION

- 2.1 Site Location
- 2.2 Existing Site
- 2.3 Proposed Development
- 2.4 Local Development Documents
- 2.5 Available Flood Risk Information

3.0 FLOOD RISK VULNERABILITY

- 3.1 The Sequential and Exception Test
- 3.2 Vulnerability Classification
- 3.3 Application of the Sequential Test

4.0 SITE SPECIFIC FLOOD RISK

- 4.1 Local Flood Assets
- 4.2 Sources of Flooding
- 4.3 Probability of Flooding
- 4.4 Historic Flooding
- 4.5 Climate Change
- 4.6 Residual Risk

5.0 FLOOD RISK MITIGATION

- 5.1 Summary of Risks
- 5.2 Flood Risk Mitigation Measures

6.0 CONCLUSIONS

ATTACHMENT 1 – Floor Plan, Elevations, Site and Location Plan (Dwg 4411-25 01)

DISCLAIMER

This document has been prepared solely as a Flood Risk Assessment in support of a planning application for proposed commercial development at Wardentree Lane, Spalding. "Ellingham Consulting Ltd" accepts no responsibility or liability whatsoever for any use made of this document other than by the client "GR Merchant Ltd" for the purposes it was originally commissioned and prepared. All comments and opinions made are based upon information available to "Ellingham Consulting Ltd" during the necessary investigative process, and the conclusions and recommendations, could therefore, differ in the event of material subsequently being found erroneous, incomplete, or misleading. "Ellingham Consulting Ltd" therefore, accepts no liability should this prove to be the case.

1.0 INTRODUCTION

This Flood Risk Assessment has been prepared in accordance with National Planning Policy Framework (NPPF) and supporting planning practice guidance (PPG) on Flood Risk and Coastal Change.

In areas at risk of flooding or for sites of 1 hectare or more, developers are required to undertake a site-specific Flood Risk Assessment to accompany an application for planning permission. This Flood Risk Assessment has been produced on behalf of GR Merchant Ltd in respect of a development that consists of a new workshop at Wardentree Lane, Spalding.

A planning application for the proposed development is to be submitted by GR Merchant Ltd.

2.0 SITE LOCATION AND DESCRIPTION

2.1 Site Location

The site is located at 67 Wardentree Lane, Spalding, Lincs, PE11 3UF. The National Grid Reference of the site is 52495/32487.

The location of the site is shown in Figure 1.



Figure 1 – Location Plan (© OpenStreetMap contributors)

2.2 Existing Site

The site is on the southern side of Wardentree Lane. The site comprises an area of undeveloped land to the south of an existing commercial development. The area of development is approximately 0.38 hectares.

Environment Agency LiDAR shows that the site is flat with ground levels typically between +3.1m OD and +3.4m OD. The carriageway level of Wardentree Lane adjacent to the site is typically +3.0m.

The site is in the Welland and Deepings Internal Drainage Board (IDB) District. Surface water at the site would discharge to the local drainage network and hence to the IDB drain system. There are riparian drains close to the boundary of the site and Scraggs Dyke, an IDB watercourse, is on the northern side of Wardentree Lane.

The online British Geological Survey maps indicate that the site is likely to be underlain by Oxford Clay Formation mudstone. The bedrock is shown to be overlain with superficial deposits of clay and silt.

2.3 Proposed Development

The proposed development consists of a new workshop. Details of the proposed development are provided in Attachment 1.

2.4 Local Development Documents

The South East Lincolnshire Local Plan 2011 – 2036, adopted in March 2019, is the Local Plan for the district. Policy 4: Approach to Flood Risk states the requirements for flood risk reduction.

The South East Lincolnshire Level 1 and Level 2 Strategic Flood Risk Assessment (SFRA) was prepared in June 2017.

The Joint Lincolnshire Flood Risk and Drainage Management Strategy has been prepared by Lincolnshire County Council as the Lead Local Flood Authority. The purpose of the Strategy is to increase the safety of people across Lincolnshire by reducing the number of people at risk of flooding, increasing the resilience of local communities, and reducing the impact of flooding

2.5 Available Flood Risk Information

An extract from the Environment Agency Flood Map for Planning is shown in Figure 2. The site is located within Flood Zone 3, an area with a high probability of flooding.

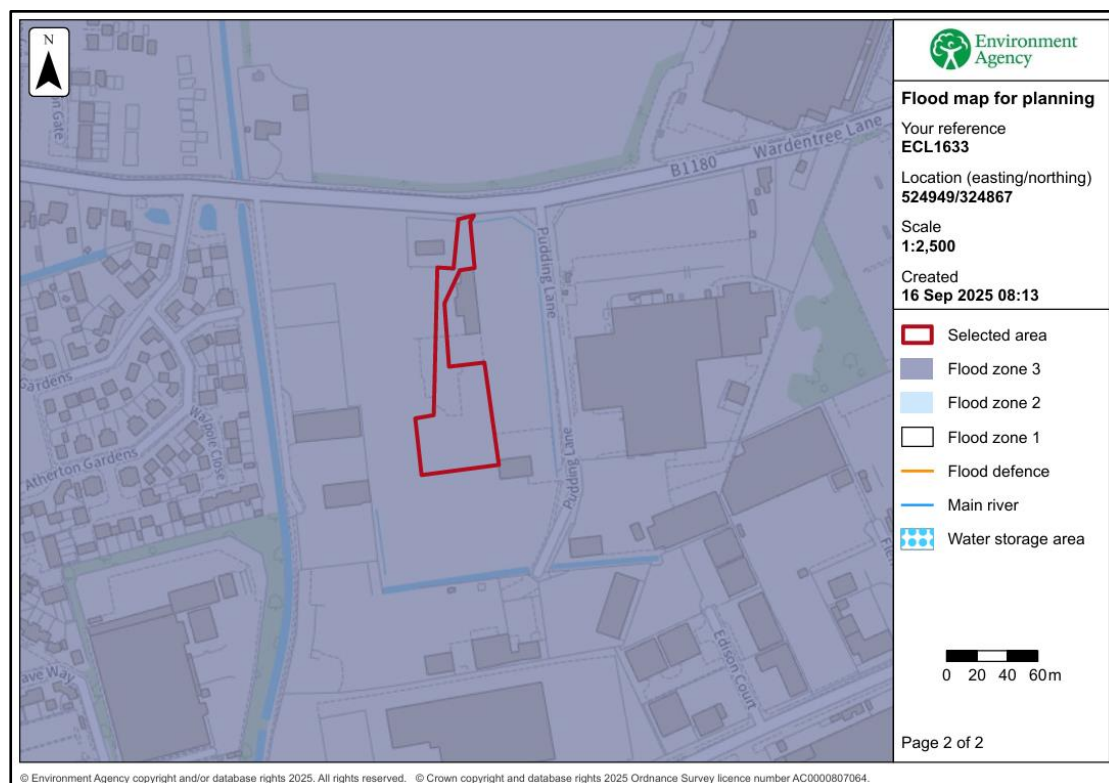


Figure 2 – Environment Agency Flood Map for Planning

The Environment Agency Long Term Flood Risk maps provide an indication of the risk from the primary sources of flooding. The details provided with these maps are summarised in Table 1. The depth of flooding identified is the maximum depth that occurs during a low chance (between 0.1% and 1% chance each year) event.

	Present Day		2050 Epoch	
	Risk of Flooding	Depth (Low chance)	Risk of Flooding	Depth (Low chance)
Rivers and the Sea	Part of the site has a medium chance (between 1% and 3.3% chance each year)	No data available	No data available	No data available
Surface Water	An isolated area of the site has a low chance (between 0.1% and 1% chance each year)	During low chance events depths are below 0.2m	Part of the site has a low chance (between 0.1% and 1% chance each year)	During low chance events depths are below 0.2m
Reservoir	Outside of the area at risk.			

Table 1 – Environment Agency Long Term Flood Risk Maps

Table 2 shows the level of risk at the site within the South East Lincolnshire SFRA.

SFRA Map	Present Day	2116
Residual Flood Hazard Map for the 1% fluvial and 0.5% tidal event	The site is outside the 'Low Hazard' area	The site is in the 'Danger for Most' area
Residual Peak Depth Map for the 1% fluvial and 0.5% tidal	The site is outside the area at risk	The peak flood depth is 0.25m-0.5m

Table 2 – Flood Risk within SFRA Maps

3.0 FLOOD RISK VULNERABILITY

3.1 The Sequential and Exception Test

The NPPF requires the application of a Sequential Test to ensure that new development is in areas with the lowest probability of flooding.

The Exception Test is a method to demonstrate and help ensure that flood risk to people and property will be managed, while allowing necessary development to go ahead in situations where suitable sites at lower risk of flooding are not available.

3.2 Vulnerability Classification

Table 2 of the PPG Flood Risk and Coastal Change categorises different types of uses and development according to their vulnerability to flood risk. The proposed development is covered by the description of general industry and is classified as 'Less Vulnerable'.

Table 3 of the PPG Flood Risk and Coastal Change sets out Flood Risk Vulnerability and flood zone 'compatibility'. The site is in Flood Zone 3 and the development is 'Less Vulnerable' therefore it is not necessary to complete the Exception Test.

PPG Flood Risk and Coastal Change defines that the lifetime of the development in terms of flood risk and coastal change is 100 years.

3.3 Application of the Sequential Test

It is for the Local Planning Authority, using the evidence provided and taking advice from the Environment Agency as appropriate, to consider whether an application passes the Sequential Test.

Large parts of the South Holland district close to the River Welland lie within Flood Zone 3. As such opportunities to undertake the development at an alternative site with a lower flood risk are limited. At this location it is not possible to position the development on higher ground within the proposed site.

The River Welland has defences that provide protection during the 0.5% annual probability (1 in 200 chance each year) event. Considering that the use of the site is similar to previous uses together with the standard of protection provided by the Environment Agency defences the site is considered to pass the Sequential Test.

4.0 SITE SPECIFIC FLOOD RISK

4.1 Local Flood Assets

The site is approximately 1.1km west of the River Welland downstream of Spalding. The River Welland tidal defences, which are downstream of the confluence of the Coronation Channel and River Welland, provide protection to Pinchbeck. The tidal defences are the responsibility of the Environment Agency.

There is a long-term strategy for the maintenance of the Environment Agency defences which is reviewed and updated periodically.

There is an extensive local drainage network managed by Welland and Deepings IDB. There is an IDB maintained watercourse, Scraggs Dyke, on the northern side of Wardentree Lane. The site and the surrounding land are within the Pinchbeck catchment and drain in a north westerly direction to Pinchbeck Marsh Pumping Station. Pinchbeck Marsh Pumping Station discharges to Vernatts Drain which flows into the River Welland at Surfleet.

During the operation and maintenance of its pumping stations, associated structures, and channel systems, the IDB seeks to maintain a general standard capable of providing flood protection to its district. A routine maintenance programme is in place to ensure that the Boards assets are commensurate with the standard of protection that is sought.

Current maintenance standards of the Welland and Deepings IDB and the Environment Agency are generally good.

4.2 Sources of Flooding

A summary of the sources of flooding is provided in Table 3.

Source of Flooding	Level of Risk
Drainage Network Flooding	The risk is assessed in Section 4.3.
Surface Water Flooding	Based upon the EA maps the risk is low / very low.
Fluvial Flooding	The risk is assessed in Section 4.3.
Tidal Flooding	The risk is assessed in Section 4.3.
Reservoir Flooding	Based upon the EA maps the site is not at risk of reservoir flooding.
Groundwater Flooding	There is no evidence to suggest the site is at risk of groundwater flooding.

Table 3 – Sources of Flooding

4.3 Probability of Flooding

The probability of flooding associated with blockages in the Welland and Deepings IDB drainage system is low due to the maintenance standards achieved and managed by the IDB.

Through the operation and maintenance of the pumping stations and the channel system the Board seek to maintain a general standard capable to providing flood protection to agricultural land and developed areas of 1 in 20 years and 1 in 100 years, respectively. The risk associated with flood events that exceed the standard of protection provided is lowered due to the Welland & Deeping IDB main drains incorporating freeboard. This freeboard provides storage during the exceedance events.

The River Welland tidal defences provide protection during the 0.5% annual probability (1 in 200 chance each year) tidal event including climate change.

4.4 Historic Flooding

During the preparation of this assessment, no evidence was discovered of the site being flooded.

4.5 Climate Change

Climate change is likely to impact the site through increased rainfall intensity and duration affecting the local drainage network and increased flood levels.

The River Welland tidal defences have been designed to include an allowance for climate change.

In summary the existing systems and defences are appropriate for the design life of the development (i.e., 100 years).

4.6 Residual Risk

There is a residual risk of flooding at the site should a tidal breach occur. The South East Lincolnshire SFRA includes maps demonstrating the residual peak depth in 2115. When climate change allowances are applied to the 1% annual probability (1 in 100 chance each year) fluvial event and 0.5% annual probability (1 in 200 chance each year) tidal event the peak depth at the site is between 0.25m and 0.5m. An extract from the SFRA map is shown in Figure 3 below.

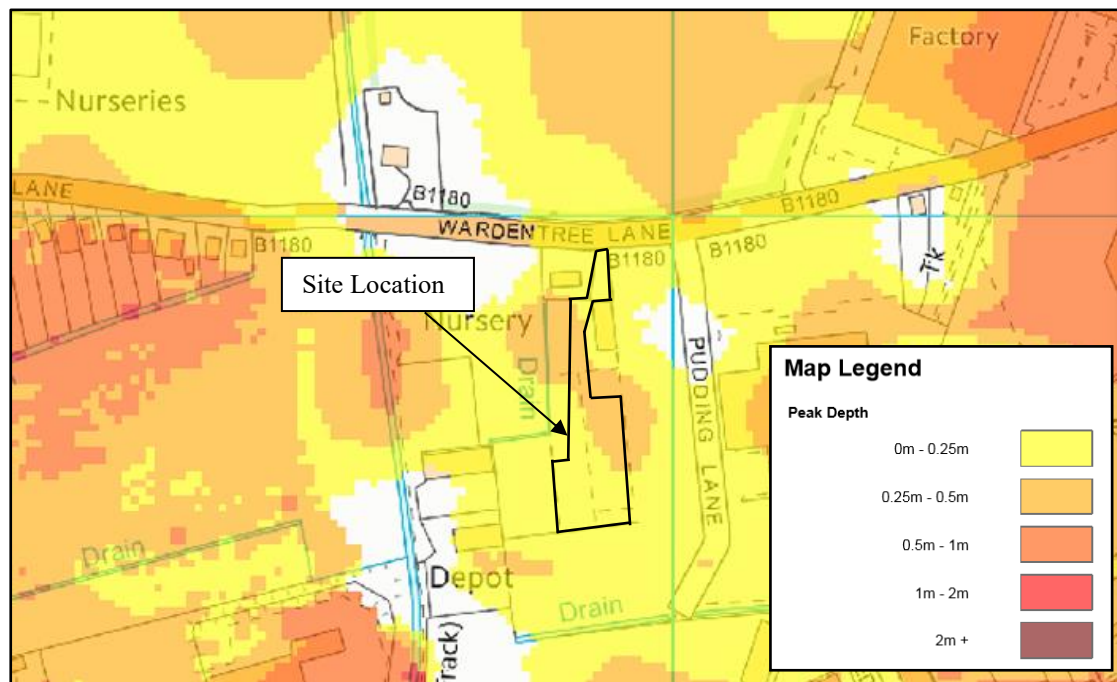


Figure 3 – SFRA 2116 Residual Peak Depth Map during the 1% fluvial and 0.5% tidal Annual Probability Event

5.0 FLOOD RISK MITIGATION

5.1 Summary of Risks

The probability of this development flooding from localised drainage systems is low. Failure of Pinchbeck Marsh Pumping Station could lead to an increased level of risk within the IDB catchment.

The probability of the site flooding from any Environment Agency system is less than 0.5% annual probability (1 in 200 chance each year) because of the standards of the existing flood defence systems. Over time there will be a gradual increase in risk to the site due to climate change. During the design life of the development it is not anticipated that the site would flood.

The SFRA considers the residual risk associated with overtopping and a breach in the defences in 2116. During the 0.5% annual probability (1 in 200 chance each year) plus climate change event the maximum flood depth at the site is 0.5m.

The proposed development increases the impermeable area and therefore has the potential to increase the rate of surface water runoff from the site.

5.2 Flood Risk Mitigation Measures

The PPG states that resistance and resilience measures may be suitable in some circumstances. One example given when it is suitable is as a measure to manage residual flood risk. The mitigation measures required at this site are to manage the residual risk from a breach in the defences therefore flood resilience is appropriate.

Considering the nature and scale of the risk it is recommended that:

- the users of the site should register to receive flood warnings from the Environment Agency to reduce the vulnerability of people at the site;
- the users of the site should identify the actions to be undertaken in the event of receiving a flood warning;
- the electrical supply and switchboard are above the flood level; and
- there is a water entry strategy that allows flood water to enter and drain freely from the buildings.

Should there be a failure of Pinchbeck Marsh Pumping Station and conditions were such to put properties and land at risk of flooding, the IDB would take emergency action to maintain the drainage level of service by using temporary pumping equipment.

It is recommended that surface water run-off is managed so that stormwater from the development will not affect any adjoining properties or increase the flood risk elsewhere.

6.0 CONCLUSIONS

As a result of the assessment, the following conclusions have been reached.

- The proposed development consists of a new workshop building at 67 Wardentree Lane, Spalding.
- The site is located within an Internal Drainage Board catchment and through the operation and maintenance of the pumping stations and the channel system the Board seek to maintain a general standard capable to providing flood protection to agricultural land and developed areas of 1 in 20 and 1 in 100 years, respectively.
- The proposed development is in Flood Zone 3. The proposed development benefits from tidal defences on the River Welland that provide protection the 1% annual probability (1 in 100 chance each year) fluvial event and 0.5% annual probability (1 in 200 chance each year) tidal event including climate change.
- There is a residual risk associated with a breach of the defences with flood depths at the site up to 0.5m.
- It is recommended that flood resilience measures are adopted to manage the risk of a breach including the use of flood warnings, a water entry strategy, and elevated electrical services.
- The development passes the Sequential Test and is therefore suitable for the proposed location.

ATTACHMENT 1

**FLOOR PLAN, ELEVATIONS, SITE AND LOCATION PLAN
(DWG 4411-25-01B)**



	BING DETAILS ADDED		SEP11 2026
	CLIENT AMENDMENTS		AUG 2025
ref:	revision		date
G. R. MERCHANT LTD. ARCHITECTURAL CONSULTANTS  4 Wrights Mews 12A Park Road, Holbeach, Spalding, Lincs. PE12 7EE Tel: 01406 4980800 E-Mail: office@grrmerchantltd.com Website: www.grrmerchantltd.com			
Project	PROPOSED NEW WORKSHOP 67 WARDEN TREE LANE PINCHBECK SPALDING, Lincs. PE11 5LF		
Client	MR G. SCRUPPS		
Drawing	FLOOR PLAN - PROPOSED ELEVATIONS - PROPOSED SITE & LOCATION PLANS		
Job Ref.	4411-25	Drawing No.	01B
Date	AUGUST 2025	Drawn	SLB
Scales	1:50 & 1:100 (Unless Otherwise Stated)		
DO NOT SCALE FROM THIS DRAWING This drawing is copyright and may not be altered, traced, photographed or used for any other purpose other than that for which it is issued. The General Contractor is to check all dimensions on site and report any discrepancies to G. R. Merchant Ltd. All details shown on this drawing including dimensions are based upon typical site conditions related to the area. No responsibility can be accepted for abnormal conditions which may be discovered during construction unless reported to the G. R. Merchant Ltd so that design amendments may be considered. This site survey is recommended in respect of foundations to establish suitable site conditions before foundation work is undertaken. This drawing is limited in the amount of information contained thereon and does not purport to contain a full specification of the works. It is solely for the purpose of obtaining Planning / Building regulation approval. The drawing must not be used as an architect document alone. The works will not be completed or inspected on site by G.R Merchant Ltd or any representative thereof. It is the client or their appointed contractor's responsibility to ensure that the works are carried out in accordance with manufacturer's instruction and relevant code of practice. Materials shall conform to appropriate British standard specification or BBA certificate or European code of practice. The Employer / Client shall ensure that the selected contractor is conversant with and adopts all measures necessary to achieve compliance with Health and Safety legislation for Building sites and Work places. The Employer / Client is advised that should the works need to comply with the Construction Design and Management Regulations an independent Principal Designer will be required. The works shall comprise of all that is shown on the drawing and details. Works that may not typically be shown but may be reasonably inferred as necessary to carry out the works will be deemed to be included. It is the plot / land owners responsibility to be aware of the Party Wall Act. Act 1966, when building in close proximity to adjoining neighbours.			