

Surface Water Manhole Schedule

Manhole	Cover Level (m)	Invert Level (m)	Cover Type	Manhole Type	Eastings	Northings	Manhole Diameter (mm)	Notes
SW1	3.050	2.650	Standard	PPIC	-	-	-	
SW4	2.932	2.426	Standard	PPIC	-	-	-	
SW5	3.050	2.664	Standard	PPIC	-	-	-	
SW6	3.050	2.575	Standard	PPIC	-	-	-	
SW8	3.110	2.256	Heavy Duty	Concrete	-	-	-	
SW11	3.150	2.370	Standard	PPIC	-	-	-	
SW12	3.150	2.135	Standard	PPIC	-	-	-	
SW13	3.130	2.056	Heavy Duty	PPIC	-	-	-	Encased in concrete
SW14	3.250	2.139	Standard	PPIC	-	-	-	
SW15	3.823	1.871	Heavy Duty	Concrete	-	-	-	
SW16	-	1.45	Heavy Duty	Concrete	-	-	-	

Pipe Run Schedule

Pipe Run	Pipe Size (mm)	Length (m)	Gradient (1 in x)	Output Invert Level	Notes
SW1-SW4	150	-	185		
SW4-SW8	150	-	130		
SW5-SW6	150	-	311		
SW6-SW8	150	-	130		
SW8-SW15	225	-	140		
SW11-SW12	150	-	100		
SW12-SW13	150	-	100		
SW13-SW15	150	-	64		
SW14-SW15	150	-	89		
SW15-SW16	300	-	170	1.743	With cover slab. See 24060-105


Foul Water Manhole Schedule

Manhole	Cover Level (m)	Invert Level (m)	Cover Type	Manhole Type	Eastings	Northings	Manhole Diameter (mm)	Notes
FW2	3.000	2.747	Heavy Duty	PPIC	-	-	-	Encased in concrete
FW3	2.760	2.013	Heavy Duty	PPIC	-	-	-	Encased in concrete
FW4	3.034	2.800	Heavy Duty	PPIC	-	-	-	Encased in concrete
FW5	3.220	1.632	Heavy Duty	PPIC	-	-	-	Encased in concrete
FW6	3.275	2.900	Heavy Duty	PPIC	-	-	-	Encased in concrete
FW7	3.100	2.800	Heavy Duty	PPIC	-	-	-	Encased in concrete
FW8	3.275	1.320	Heavy Duty	PPIC	-	-	-	Encased in concrete
FW10	3.150	2.800	Heavy Duty	PPIC	-	-	-	Encased in concrete
FW11	3.925	1.045	Heavy Duty	PPIC	-	-	-	Encased in concrete
FW12	-	0.830	Heavy Duty	Concrete	-	-	-	

Pipe Run Schedule

Pipe Run	Pipe Size (mm)	Length (m)	Gradient (1 in x)	Output Invert Level
FW2-FW3	100	-	33	
FW3-FW5	100	-	80	
FW4-FW5	100	-	14	
FW5-FW8	150	-	80	
FW6-FW8	100	-	7	
FW7-FW8	100	-	12	
FW8-FW11	150	-	80	
FW10-FW11	100	-	9	
FW11-FW12	150	-	80	

DETERMINED
PLAN

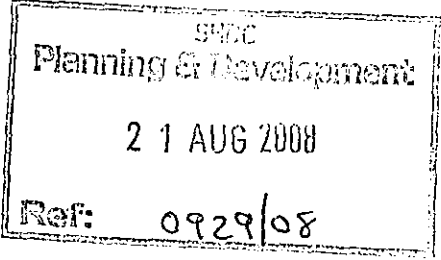

Notes:

1. DO NOT SCALE FROM THIS DRAWING.
2. Drawing is to be read in conjunction with drawing:- 24060-101, 103, & all relevant architect's drawings. Any inconsistencies should be reported to PRP immediately.
3. Existing manhole levels provided by Taylor Pearson.

P1	28/05/2008	Issued as Preliminary	SRS
Rev	Date	Description	Initials



PRP
consulting civil & structural engineers

Park House
22 Warren Park Way
Enderby Leicester
LE19 4SA

Telephone: 0116 275 1710
Facsimile: 0116 286 9173
leicester@prp.uk.com
www.prp.uk.com

Leicester
Northampton
Huntingdon
Leeds

engineering excellence | creating advantage

Client:	Taylor Pearson
Architect:	KMB Ltd.
Project:	Industrial Units Warden Tree Lane Pinchbeck
Title:	Drainage Tables
Status:	PRELIMINARY
Drawn: SRS	Checked: AK
Date: May 2008	Scale @ A2:
Drawing No:	24060-102P1