
NEW ACCESS TO GLEN AVENUE TO
REQUIREMENTS & SPECIFICATION OF L.C.C. HIGHWAYS DEPARTMENT.

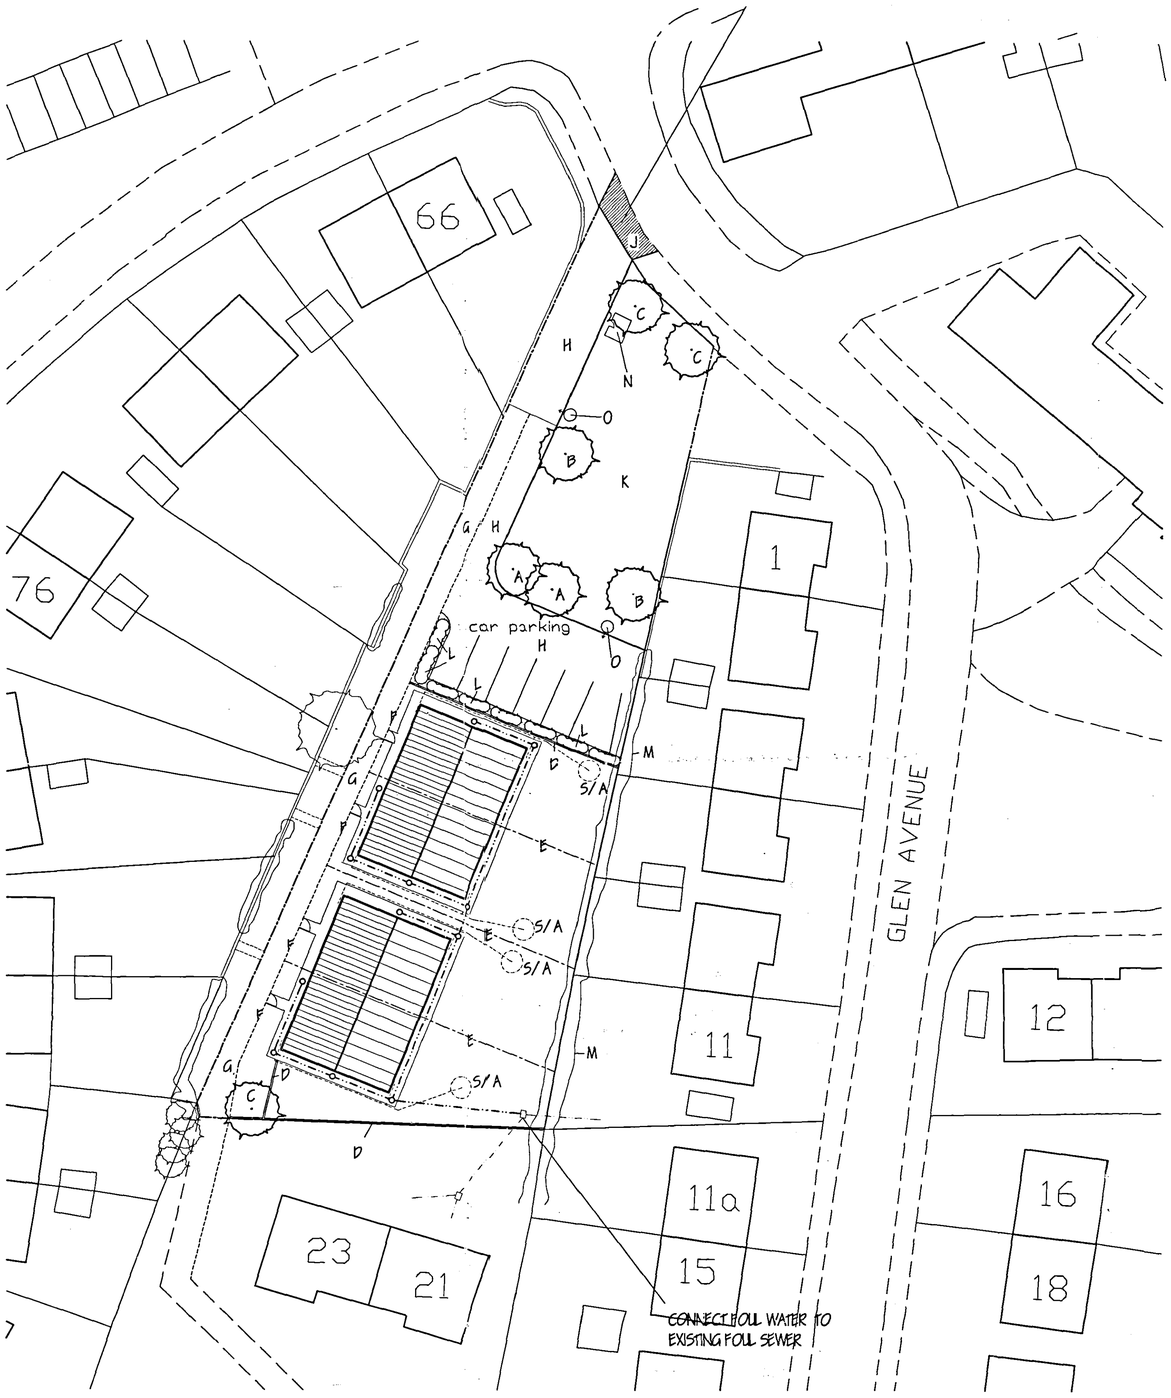

SITE PLAN
1/250

NOTE: DPC LEVEL OF NEW DWELLING TO BE APPROXIMATELY 150MM ABOVE FRONTAGE ROAD [GLEN AVENUE]

RAINWATER DISPOSAL TO
BRICK RUBBLE SOAKAWAYS.
5m AWAY FROM BUILDING.

SOFT LANDSCAPING (SHRUBBERY) AREAS
PLANT NAME & SPECIFICATION (for planting season) Oct-Mar only
Berberis Thunbergii - Transplant 1+2 450-600mm high
Hedera Helix 'Hibernica' - 300-450mm spread. 9cm.pot. minimum of 3 no. breaks
Ligustrum Ovalifolium 'Aureum - 300-450mm high. 3L.pot
Prunus Lusitanica - 450-600mm high. 3L.pot
Pyracantha 'Soleil D'Or' - 450-600mm high. 3L. pot
Rosa Rugosa 'Frau Dagmar Hastrup' - 300-450mm high. Bare root

N.B: AFTER PLANTING 65MM DEEP LAYER OF MEDIUM GRADE BARK MULCH TO BE APPLIED.

PRIVATE DRIVE & CAR PARKING AREA TO REQUIREMENTS OF L.C.C. HIGHWAYS DEPARTMENT.
- THE FIRST 15 METRES TO BE TARMAC. THE REMAINING DRIVEWAY AND PARKING AREA TO BE GRAVEL.
THE DRIVEWAY AND PARKING AREAS TO BE KERB EDGED.

LANDSCAPING, TREE PLANTING & FENCING SCHEME.

A - SILVER BIRCH (BETULA PENDULA) HEAVY STANDARD
B - HAWTHORN (CRATAEGUS LAEVIGATA) HEAVY STANDARD
C - WHITEBEAM (SORBUS ARIA) HEAVY STANDARD
D - 1.8 METRE HIGH VERTICAL CLOSE BOARDED FENCE TO DROP DOWN TO 1M WHEN LEVEL WITH THE FRONT OF BUNGALOWS
E - CONCRETE POST & WIRE BOUNDARY FENCE
F - FRONTAGE TIMBER 'WICKET' FENCE WITH GATE
G - 1.8 METRE WIDE CONCRETE FOOTPATH
H - 15M TARMAC ACCESS ROADWAY REMAINDER GRAVEL WITH KERB EDGINGS
J - ACCESS & DROP KERBS TO GLEN AVENUE
K - EXISTING GRASSED OPEN SPACE TO BE RETAINED
L - LOW SHRUBS (SEE SEPARATE SCHEME)
M - EXISTING MIXED HEDGE
N - BIN STORAGE: CONCRETE SLAB 1.5M HIGH VERTICAL WITH CONCRETE POSTS DOUBLE HANDGATE 4 METRES LONG X 3 METRES WIDE
O - 6 METRE POST TOP COLUMN: WITH A PHILLIPS SGS252 42W LIGHT CONTROLLED BY ALL NIGHT PHOTOCELL AS LINCS HIGHWAYS SPECIFICATION (SEE PHOTO)

All planting to be in accordance with BS 4428:1989 and amendment No. 1 (1991)

All trees to be plated with minimum 0.6m plastic mulch mat and to be staked, tied and tubed.

1/3 to ½ bag of peat free tree and shrub planting compost to be incorporated into backfill for each tree hole.

Received
Planning & Development
16 OCT 2006
Reg. 1269/06

AMENDED PLAN
Ref. A2



© Crown Copyright 2006. All rights reserved. Licence number 100021449

LOCATION PLAN
1/1250

NORTH

C	CONDITION COMPLIANCE AMENDMENTS	OCT '06
B	CONDITION COMPLIANCE AMENDMENTS	SEPT '06
A	CONDITION COMPLIANCE APPLICATIONS	SEPT '06
ref.	revision	date

G. R. MERCHANT LTD.
I.ENG AMICE FIWO
ARCHITECTURAL, STRUCTURAL AND LAND DRAINAGE CONSULTANTS
4 Wrights Mews
12A Park Road, Holbeach,
Spalding, Lincs. PE12 7EE
Tel: 01406 490200
Fax: 01406 425744
E-Mail: gr.merchant@btconnect.com

Project
SHDC-NEW BUILD PROGRAMME 2006/07.
GLEN AVENUE,
PINCHBECK.
SPALDING. LINC'S.

Client
SOUTH HOLLAND DISTRICT COUNCIL

Drawing
2 No - PAIRS OF TWO BEDROOM BUNGALOWS
SITE & LOCATION PLANS.

Job Ref.	Drawing No.
1527-06.	11C.
Date	Drawn
MAY '06.	GRM.

Scales
AS INDICATED.

DO NOT SCALE FROM THIS DRAWING

This drawing is copyright and may not be altered, traced, photographed or used for any other purpose other than that for which it is issued. The General Contractor is to check all dimensions on site and report any discrepancies to the Architect. All details shown on this drawing including foundations are based upon current site conditions known to the writer. No responsibility can be accepted for variations in ground conditions, boundary positions, existing services etc. which may be encountered. Any such variations are to be reported to the Architect for comment. Any design amendments which may be necessitated by such variations will be subject to extra charges. Any design amendments which may be necessitated to suit owners requirements or to satisfy Local Authority or statutory undertakers specific site conditions (eg. foundation depth) is unconfirmed. This drawing is limited to the amount of information considered and does not purport to contain a full specification of the works. It is solely for the purpose of obtaining Planning / Building Regulation approval. This drawing must not be used as a contract document alone. The works will not be supervised or inspected on site by G.R. Merchant or any representative thereof. It is the client or their appointed agents responsibility to control workmanship, substitution of materials, advisement to specification, variations to contract etc. All materials to be new unless otherwise stated and all components and materials etc. to be used fitted and installed etc. in strict accordance with manufacturers instruction and relevant code of practice. Materials shall conform to appropriate British standard specification or BBA certificate or European code equivalent. The Employer / Client shall ensure that the selected contractor is conversant with and adopts all measures necessary to achieve compliance with Health and Safety legislation for Building sites and Work places. The Employer / Client is advised that should the works need to comply with the Construction (Design and Management) Regulations then the client is responsible for compliance with the Regs. You Designer and Principal Contractor in this process. For details. Work that may not reasonably be foreseen but may be necessary to carry out the works must be reported to the client. It is the plot / land owners responsibility or the owners of the Party Wall etc. Act 1996 when building in close proximity to adjoining neighbors boundaries.