


ELEVATIONS

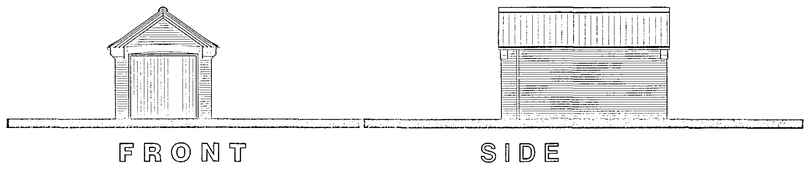

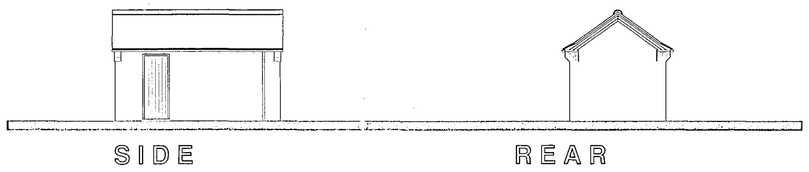

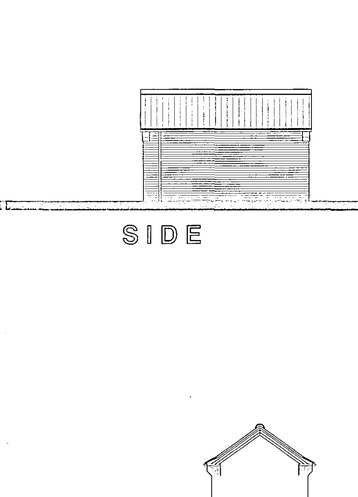


PLAN 1:50

Roof covering to be in concrete interlocking tiles to match dwelling on 25mm x 40mm treated softwood tiling battens at guage centres on untearable underlay
All roof tiling to be in accordance with the tile manufacturer's specification and recommendations and in accordance with BS5534

30mm x 5mm galv mild steel lateral restraint straps to gable walls at 1600mm intervals at rafter and ceiling joist component level, solid strut below and tight pack against walls

Canopy door with gear and treated timber frame

Concrete apron extended approx 1000mm beyond front of doors

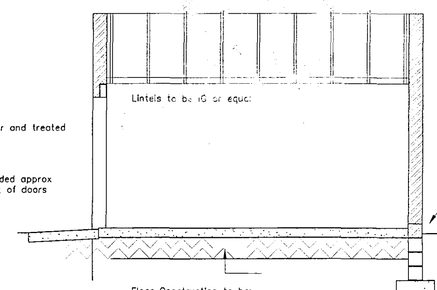

Floor Construction to be:
150mm RC35 concrete with A252 mesh reinforcement on 300 micron polythene damp proof membrane on 300mm fully compacted graded type 1 aggregate with sand blinding

Roof construction to be in TWINAPLATE trussed rafter roof system with trusses at 600mm centres maximum braced with 100mm x 25mm SC3 timbers longitudinally and diagonally in accordance with BS5268:Pt3:1985 with roof bracing

Fascias and barge boards to be in nominal 25mm tickness wrot treated softwood painted to finish
Soffits to be in 6mm thickness marine plywood supported on ex 50mm x 50mm s/w framing

Rainwater goods to be coloured PVC-U half round 115mm gutters and 68mm diameter downpipes to discharge to soakaway min 5000mm from dwelling and all other buildings

External walling to be in single leaf construction with piers 103mm and solid one brick 215mm walling as indicated
external facing brickwork to match dwelling

Damp proof course in ZEDCOR heavy duty polythene with embossed face located in all walls horizontally at 150mm above finshed ground level

Ground Level

Natural ground level to be raised by approximately 300mm to suit new dwelling slab datum level

Foundations to be mass concrete RC35 strips 500mm wide x 250mm deep with nominal reinforcement A393 mesh in bottom
Where foundation below garage door openings provide additional layer of mesh in top section of foundation
Foundations to be on firm consistent formation suitably loadbearing

SECTION 1:50

28 OCT 2003
1302/03

L. A. Building Design
Architectural and Surveying Practice
55 Hannam Boulevard
Spalding
Lincolnshire PE11 1LB
Telephone/Fax: Spalding (01775) 711437

Peter S Lithgow MCIOB MBIAT
Member of the Chartered Institute of Building and
Member of the British Institute of Architectural Technologists

project
Proposed Development at
Six House Bank
West Pinchbeck
Spalding
Lincolnshire

client
M J YOULD

drawing
Type Design
Garage

date	scale(s)
Sep 2003	1/100 & 1/50
drawn by	checked
Peter S Lithgow	
job no	drawing no
01/21	1

PLANNING
GRANTED