




SOUTH EAST 1-100
EXISTING

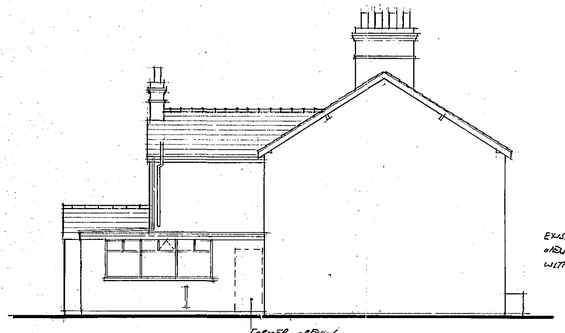


NORTH EAST 1-100
EXISTING

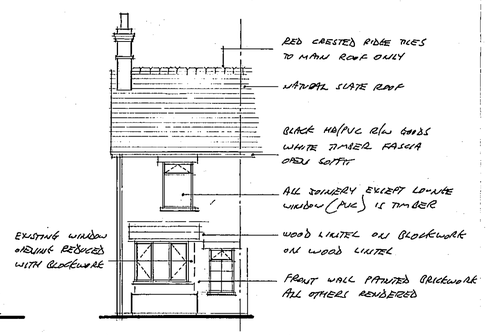


NORTH WEST 1-100
EXISTING




PROPOSED

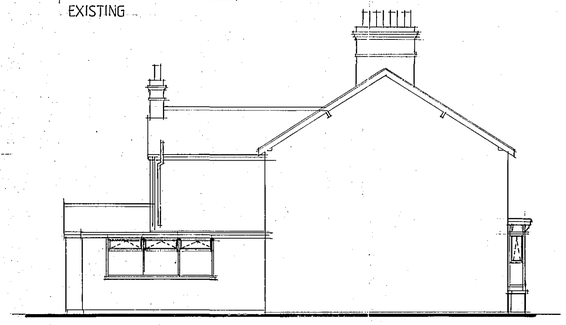


PROPOSED



PROPOSED

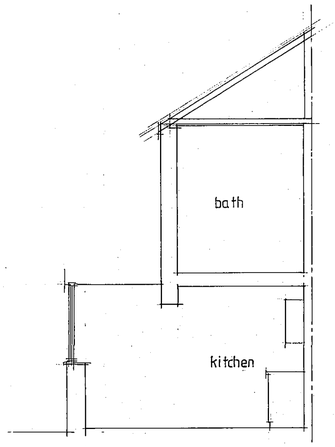

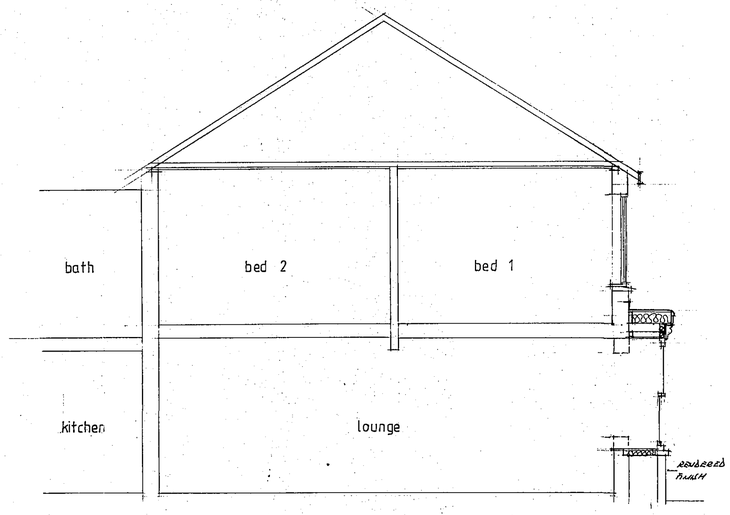


NOTES

W1 REPLACE EXISTING WINDOW WITH PURPOSE MADE DRAUGHT SEALED TIMBER WINDOW. FIT TRICKLE VENT. PIT TOP HUNG OPENING SASH SAME SIZE AS EXISTING. INSTALL 4-16-4 DOUBLE GLAZING WITH LOW E COATING OF 0.15. OBSCURE GLAZE.


W2 & W3 REPLACE EXISTING WINDOWS WITH PURPOSE MADE DRAUGHT SEALED TIMBER WINDOWS. FIT TRICKLE VENT. PIT TOP HUNG OPENING SASH TO TOP HALF OF WINDOW. WINDOW TO REPLICATE LOOK OF ORIGINAL SLIDING SASH. INSTALL 4-16-4 DOUBLE GLAZING WITH LOW E COATING OF 0.15. BOTTOM PANES WITHIN 800mm OF FLOOR TO BE TOUGHENED

W4 REPLACE EXISTING WINDOW WITH PURPOSE MADE DRAUGHT SEALED TIMBER WINDOW. FIT TRICKLE VENTS. PIT TOP HUNG OPENING SASHES TO ALL 3 MODULES. INSTALL 4-16-4 DOUBLE GLAZING WITH LOW 'E' COATING OF 0.15.


W5 REMOVE EXISTING DOUBLE GLAZED UPVC WINDOW. REMOVE BLOCK INFILL EXCEPT THAT BELOW PREPARED CILL LEVEL TO REFORM ORIGINAL BAY APPEARANCE. EXISTING LINTEL OVER.
PURPOSE MADE DRAUGHT SEALED TIMBER WINDOW. FIT TRICKLE VENT. FIT TOP HUNG OPENING SASH TO TOP HALF OF WINDOW. WINDOW/BAY TO REPLICATE LOOK OF ORIGINAL BAY.
INSTALL 4-16-4 DOUBLE GLAZING WITH LOW E COATING OF 0.15. BOTTOM PANES WITHIN 800mm OF FLOOR TO BE TOUGHENED.
FORM BAY ROOF WITH CODE 4 LEAD ON 18TH EXTERIOR GRADE PLY ON TIMBER FRAMEWORK. FIBREGLASS INSULATION BETWEEN TIMBER FRAMEWORK. 12mm FOIL BACKED PLASTER BOARD WITH SKIM FINISH TO CEILING
18TH EXTERIOR GRADE PLY WINDOW BOXED ON TIMBER FRAMEWORK WITH FIBREGLASS INFILL.




W6 TIMBER GARDEN STYLE WINDOW TO BE REMOVED & OPENING BLOCKED UP & RENDERED OVER.

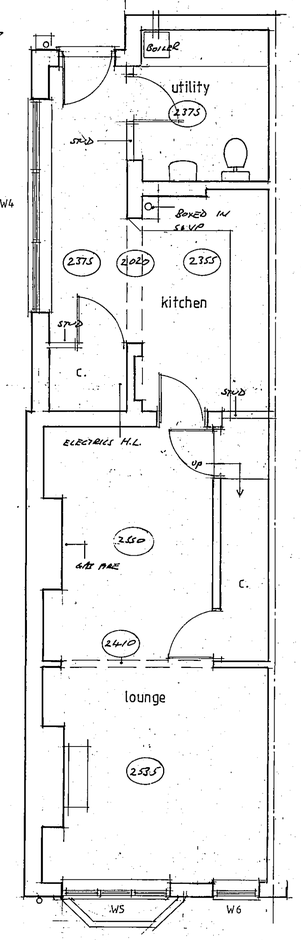


GROUND FLOOR 1-50
EXISTING

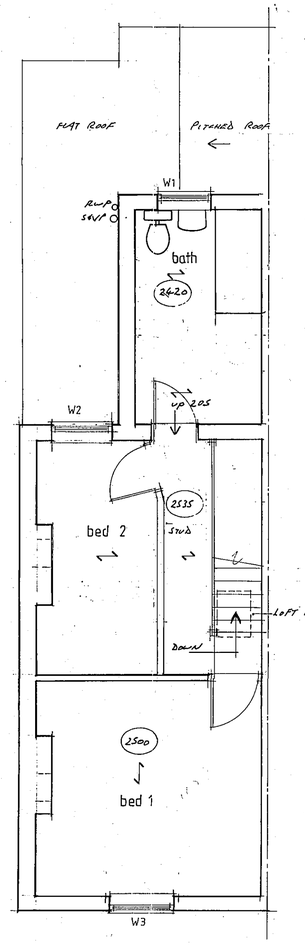

FIRST FLOOR 1-50
EXISTING

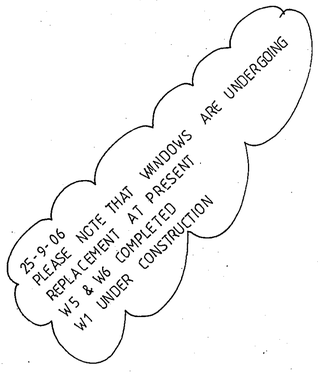

ROOF PLAN 1-50

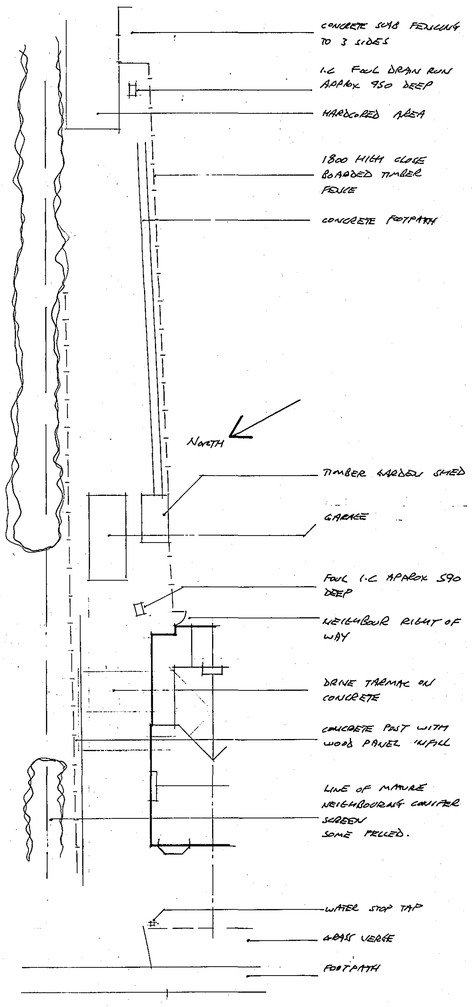

SITE PLAN 1-200

SHDC
PLANNING & DEVELOPMENT
2 6 SEP 2006
Ref. 1350/06

VOIDED

Contractor To Check All Dimensions On Site Before Work Commences.

Rev.	Date.	Init.	Revision Details.
A	25-4-06	AB	PLANS FIRST FLOOR
B	26-1-5	AB	ADD NOTES
C	25.9.06	AB	ALT FOR PLANNING

PODDINGTONS
Architectural Design Consultants
Unit 7, The Flaxmill, Flaxmill Lane, Pinchbeck, Spalding, Lincs. PE11 3XQ.
Tel: 01775 720866 Fax: 01775 720877

Project.
MR A BOOR. & MISS L TAYLOR
17, SURFLEET ROAD, PINCHBECK.
PROPOSED REPLACEMENT WINDOWS

Drawing.
PLAN AS EXISTING

Scale.	Drawing. No.
AS SHOWN	3171-1
Drawn.	
Date. MARCH 2004	Rev. A B C