
Contractor to check all Dimensions on site prior to ordering materials / commencing work.

Do Not Scale from this Drawing - If in doubt then please ask

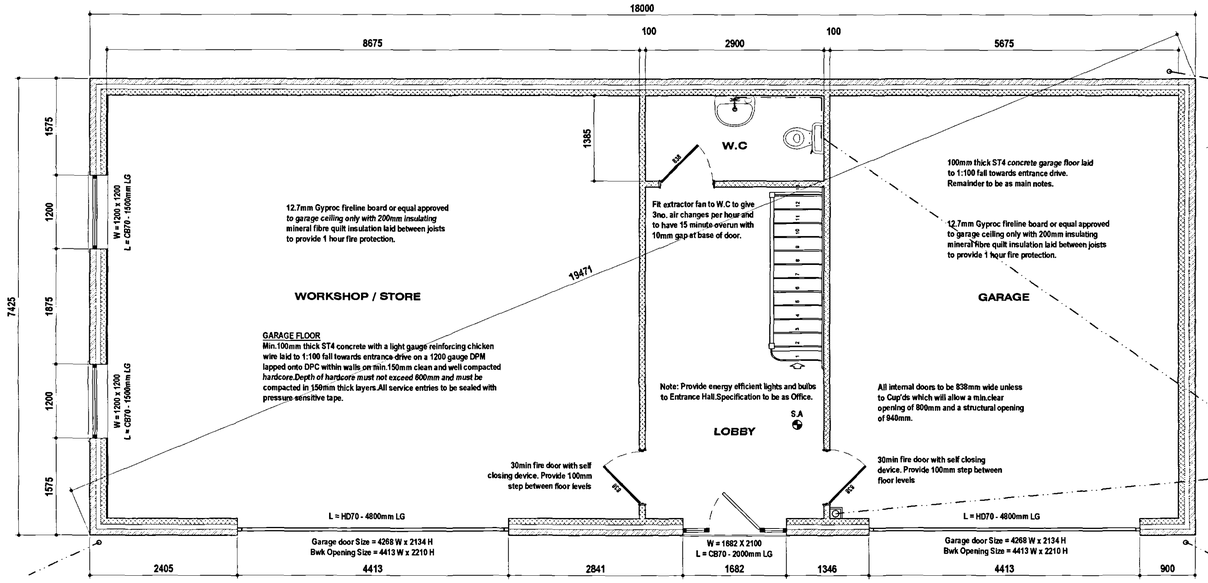

Underground drains to be as rainwater drainage but with min.1:80 and max.1:40 falls.Fall of drains from gullies to be 1:40.All drains passing thro' walls to have concrete lintel over with 50mm space around filled with compressible material and opening masked with durable rigid sheet to prevent ingress of vermin or back fill.Drain runs must not be any lower than foundation depth unless min.of 1m from any building.Provide roddable access to all change in bends and junctions.Contractor to ensure no live drains run beneath proposed works.


The contractor shall provide a Notice / Marking *within the proposed utility stating that "The* foul drainage system from this property discharges to a Sewage Treatment Plant and drainage field (specify location).The tank requires monthly inspections of the outlet chamber or distribution box to observe that the effluent is free flowing and clear.The owner is legally responsible to ensure that the system does not cause pollution, a health hazard or a nuisance.

New I.C less than 650mm deep and only one branch connection to be 225mmØ and I.C between 600mm and 1000mm deep to be 450mmØ uPVC Osma or equal approved.I.C over 1000mm deep to be 1200x750 on 150mm C20P concrete base with 215mm Class B brick walls with Grade B medium duty cover.


All external lights except garage to have a sensor which will extinguish the light when there is enough daylight and when not required at night

Provide sloped access ramp to front entrance door with min.1m clear opening.Level surface at door position to be at least 1.2m² with sloped gradient of not steeper than 1:15 if slope is not longer than 10m or not steeper than 1:12 if slope is less than 5m.Note additional DPC required at coarse above usual DPC level to level landing / sloped areas only.Ensure DPC is lapped with DPM in floorslab.


PROPOSED GROUND FLOOR PLAN
Scale 1:50

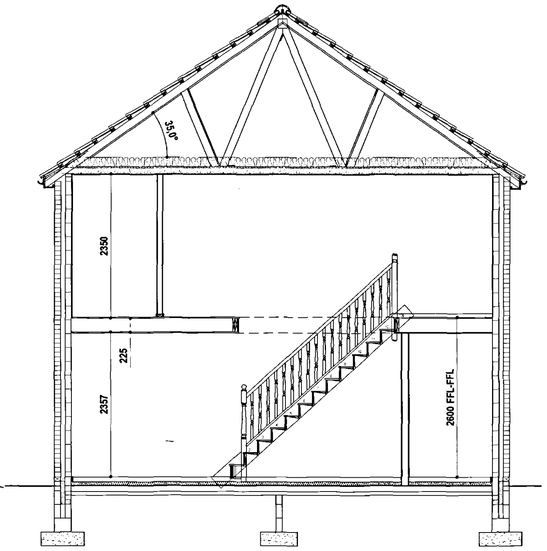

PROPOSED SECTION
Scale 1:50

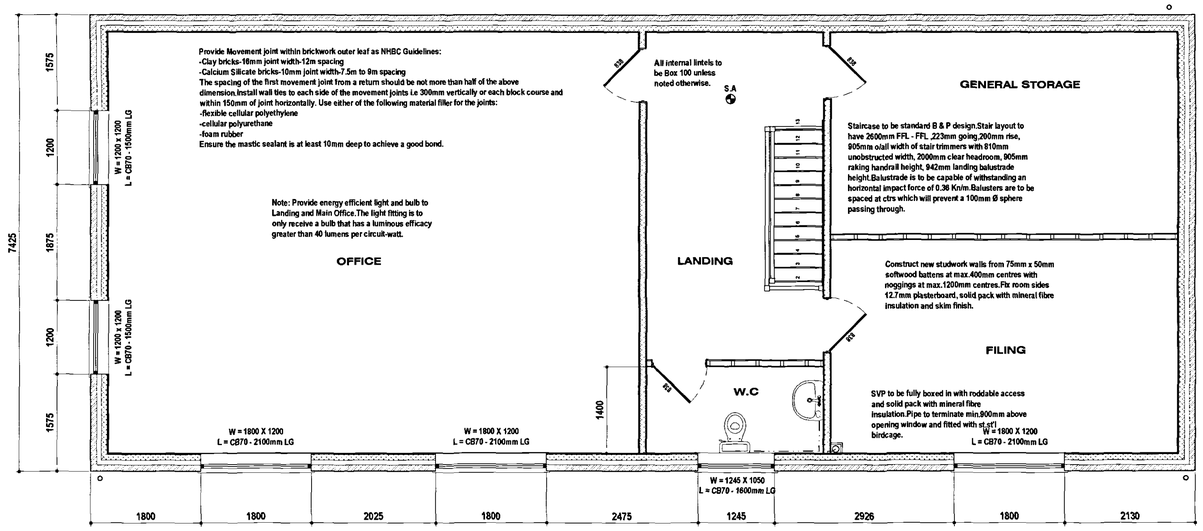

PROPOSED FIRST FLOOR PLAN
Scale 1:50

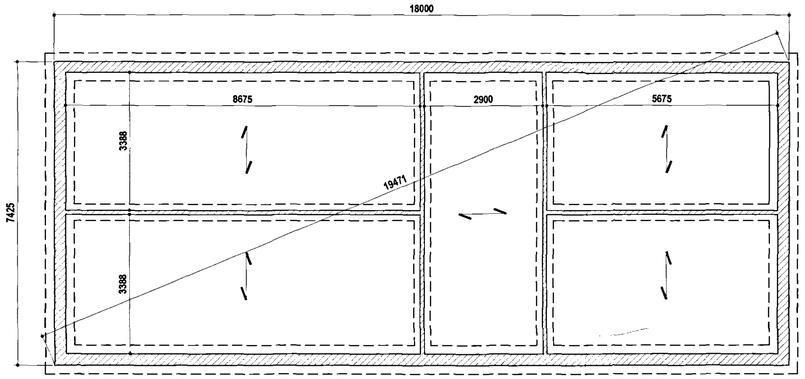

PROPOSED FOUNDATION PLAN
Not to Scale

HEATING SYSTEM
Provide a Low Pressure Hot water Central system via Gas Fired Boiler and cyclinder complete with fan assisted flue and combustion air vent. Balanced flue to be located on external wall within 2m of ground level. Area of vent is to be in strict accordance with manufacturer's recommendations.Boiler to have a SEDBUK rating of 85 % Electrical operated boiler control interlocks are to control the operating periods of the boiler which in turn is controlled by a room thermostat positioned in proposed living room.The boiler should only fire when the space heating or the Cylinder tamonstat calls for heat.All radiators are to be fitted with thermostatic radiator valves. The hot water cyclinder is to be insulated with a factory applied PU foam coating at least 35mm thk having a min. density of 35kg/m³. All space heating pipework located outside the building fabric insulation layers to be wrapped with insulation material having a thermal condoctivity at 40°C not exceeding 0.035 Wm°K and a thickness equal to the outside diameter of pipe upto max. of 40mm.It should be noted that central heating and hot water pipework in unheated areas may need increased insulation thicknesses for the purpose of protection against frost, refer to BRE Report No. 262 2002 Edition.

COMMISSIONING OF HEATING AND HOT WATER SYSTEM
Contractor to submit a certificate to show that commissioning has been successfully carried out. The certificate should be made available to the Client and SHDC building inspectors. A suitable certificate should be one published as part of the Benchmark Code of Practice for Installation, Commissioning and Servicing of Central Heating Systems, a blank copy may be included within the boiler manufacturers installations instructions or from C.H Information Council on Tel no: 01926 423 284.

SOAKAWAYS
All rainwater to discharge into soakaways and to be min.of 5m from any building & a min.of 1m³ filled with rubble to within 450mm of external ground level.Overlay rubble with polythene sheet and backfill with clean topsoil.Note the soakaway inlet pipe must discharge to the centre of the soakaway in all directions.

RAINWATER DRAINAGE
White uPVC guttering and downpipes to clients approval.Falls for guttering to be 1:600 and brackets fixed at max. 2m ctrs.Downpipes to be connected into underground drains via reducing adapter.Underground drains to be 110mm Ø Osma uPVC or similar approved with flexible joints laid on 100mm psegravel and min 150mm surrends laid to 1:100 falls to new soakaway.Soakaway specification detailed elsewhere.

ROOF INSULATION
Lay 300mm mineral fibre insulation to roof area to achieve a 'U' value of 0.16w/m²K.100mm between rafters and 200mm over rafters at right angles to first layer.Fix Dovetail rafter tray in accordance with manufacturers instructions or similar approved where insulation meets roof slope to maintain roof ventilation.

ROOF FINISH
Concrete interlocking roof tiles to Clients requirements / approval in accordance with manufacturers instructions on 50x25 preservative treated timber battens on untearable sarking felt type IF with min.150mm overlaps.Generally all tiles at perimeter of roof to be clipped and nailed.

ROOF VENTILATION
Roof ventilation to be achieved via fascia level ventilators complete with integral insect proof screens which will supply the roof space with ventilation equivalent to a continuous 10mm gap.Provide at both sides of roof to ensure cross ventilation.

CEILINGS
All ceilings to be 12.7mm plasterboard to BS1230.
Ceilings to be have Coving and an Artex finish to clients requirements.Plasterboard sheets to be fixed with joints staggered and must be layed perpendicular to all joist runs.Fix boards at a min.150mm centres.

SMOKE ALARMS
To be self contained,interconnected and wired to a separately fused circuit with a battery back up.Smoke alarms to be fitted to inside of plasterboard ceilling to the ground floor max.7m from the kitchen / lounge and to be max. 3m from any bedroom door. All alarms to be strictly in accordance with BS 5446 and to be wired that when one alarm is triggered all alarms are activated.

WASTE SIZES FOR NEW PLUMBING
All new plumbing to have the following waste sizes:
W.C=100mm ø Multikwik or similar approved
W.H.B=32mm ø uPVC with 75mm Deep sealed trap
SINK=40mm ø uPVC with 75mm Deep sealed trap
SHOWER=40mm ø uPVC with 75mm Deep sealed trap
Provide access points to all changes in direction.Provide anti-siphon traps where pipe runs exceed 3m and W.H.B pipe run exceeds 1.8m.

NOGGINGS
Fix 38x38mm timber noggings to all potential loose plasterboard ceiling edges and light fittings.Position of light fittings to be advised by client on site.

INTERNAL JOINERY ,SKIRTING & ARCHITRAVES
All internal finished timber to be free from all defects and to clients approval prior to ordering any materials.

ELECTRICAL INSTALLATION
To be in strict accordance with the latest I.E.E Regulations and Engineer to advise if any appliance or position of appliance does not conform to regulations. Contractor to seek advice from Client with regard to lighting requirements.

ACCESSIBLE SWITCHES & SOCKETS
Inorder to use the dwelling more easily by all persons then wall mounted switches, sockets, TV sockets, telephone jack points and door bells,..... etc should be positioned between 450mm and 1200mm from finished floor level.Door bells & light switches to be fitted 1200mm from FFL and the remainder 450mm from FFL.

ROOF / LOFT ACCESS
Provide insulated roof access trap door with a fully weathered sealed frame and a 38mm brass bolt or to clients requirements.

BUILDING CONTROL SPECIFICATION

FOUNDATIONS
Existing building area to be stripped of all vegetable matter and rubbish to a min.depth of 150mm before excavation commences.Concrete mix for foundations to be GEN3 in accordance with BS5328:1981.Foundations to external wall to be min.700mm wide x 225mm deep.Excavate down to solid firm strata i.e 750mm deep (min.1000mm if soil is of a shrinkable nature).Exact depth to suit conditions on site and to the strict approval of the L.A Building Inspector.Any irregularities in subsoil during excavation to be brought to the immediate attention of the Building Inspector & advice to be sought from a Chartered Structural Engineer.

WALLS BELOW D.P.C
1no.Coarse of Class B brickwork & 2no. coarses of Blue Engineering brickwork below D.P.C on outer face and 1no.coarse of 7N/mm2 on inner side of cavity face.Elsewhere to be either 7N/mm2 concrete blockwork or full width trench blocks.Both to be within 225mm of DPC level.Cavity to be filled to within 225mm min. of below DPC with lean concrete mix.

GROUND FLOOR
Provide and install Prestressed concrete floor beams bearing on inner skin of cavity wall on dpc as per manufacturers details. Contractor to provide details and calculations of manufacturers floor design to Building Control prior to placing materials on order. Lay 100mm infill blocks of 7N/mm² average crushing strength and edge slip blocks as required. Ley on top of infill blocks a minimum 1200 gauge proof DPM with min. 150mm lapped joints sealed with an approved tape. Joint tape to be applied strictly in accordance with manufacturers instructions. DPM to be carried across cavity wall to join with DPC's.Provide cavity tray above DPM with weep holes at max 450mm ctrs.Separate cavity tray & dpm by mortar bed.Provide telescopic vents and air bricks at max. 1900mm ctrs to ventilate void underneath floor beams.Provide a thin sand blinding on top of dpm to ensure 60mm Celotex GA2060 insulation boards or similar approved are fully supported.Provide stripes of insulation turned up around floor perimeter to eliminate thermal bridging at floor edges.Upstand depth should be equal to floor insulation and screed finish. The upstand thickness should not exceed the combined plaster wall and skirting thickness.Provide 500 gauge vapour control layer over insulation and finish with 65mm sand / cement screed reinforced with chicken wire. Use scaffold boards when laying screed to avoid damage from all traffic.

DAMP PROOF COARSE (D.P.C)
Horizontal heavy duty polythene DPC "Hyload" or similar approved to all walls in accordance with BS 6515 and set min.150mm above all external ground levels.DPC in walls must be linked / lapped with DPM in ground floor.Provide performed cavity wall trays above windows & doors with weep vents at a max.of 2m centres with a min.of 2no.per opening.

EXTERNAL WALLS
All external walls to be 275mm overall thicknees comprising of:
-100mm Brickwork to match existing Dwelling
-75mm cavity filled with Crown Dritherm (or equal approved) built in as work progresses.Insulation batts should be kept clean and free from mortar droppings, all joints should be closely butted. Any cutting and fitting should be neatly done and not distort the layers of glass wool which comprises the material. All DPC's should be installed to ensure that penetrating water is directed only to the outer leaf.
-100mm Thermalite Shield insulating blockwork.
Continue wall insulation at least 150mm below top of perimeter floor insulation and support off wall ties.
External wall to achieve a min 'U' value of 0.35w/m²K.

CAVITIES
Close all cavity walls at jambs with Thermabate or similar approved insulated cavity closers fitted strictly in accordance with manufacturers instructions. Roof insulation to be continuous with wall cavity insulation.Install Insulated Cavity Closers by Thermabate or equal approved, 25mm thick x 75mm wide (to equal cavity width) at jambs and cills of all openings in masonry cavity walls. Secure with the proprietary clips provided at maximum 500mm centres. Ensure that closers fit tightly to each other and to the lintel. The closer at the jamb must completely lap the closer at the cill.

MORTAR
All mortar to be 6:1:1 sand/cementlime or equally approved and to be a consistent colour throughout duration of contract.Finish mortar joints as agreed with Client on site.

WALL TIES
Stainless steel cavity wall ties to BS1243:1978.To be built into cavity wall as works proceeds and spaced at 750mm centres horizontally,450mm centres vertically and 300mm staggered around all openings.Ensure wall ties are level or at least sloping to the outside leaf.Bed ties a minimum of 50mm into each leaf and ensure wall ties are completely free from mortar droppings.


LINTELS
All lintels to cavity wall to be factory insulated Birtley Supergalv range unless noted otherwise or equalled approved.All lintels must have a min.150mm endbearing and installed in accordance with manufacturer's instructions.Do not allow masonry to overhang lintel by more than 25mm.
Note: lintels are not to have a continuous baseplate.

WINDOWS & DOORS
All windows to be White uPVC to clients requirements based on styles shown on elevations.Fit with 4000mm² trickle ventilators to Kitchen, Utility,Bathroom & En-Suite windows and 8000mm² elsewhere all in accordance with manufacturer's recommendations.Patio doors to be fitted with 10000mm² ventilators.Opening vents to give 1/20 th of floor aree rapid ventilation to all rooms.All glazing within 800mm of floor level and within 300mm of a door to a height of 1500mm of ground level to have toughened glass in accordance with Section N of the Building Regulations and BS6206 class B.All double glazed units to be installed in accordance with BS 6262 and to have a 16mm Air gap with a soft Low 'E' coating on glass inner pane to achieve a min 'U' value of 2.0 w/m²K.Note all windows to have a perimeter weatherseal both internally and externally and to be fully draught sealed.Provide frosted glass to all Bathroom, W.C's and En-suite windows.Ensure windows & doors are fitted within masonry reveal to overlap cavity closer by min.10mm to avoid cold bridging.Provide reconstituted stone subcills to windows as shown.Subcill to clients approval. Ensure subcills are fully protected throughout duration of building works.

TIMBER WALLPLATES
All timber wallplates supporting roof trusses to be 100mm x 50mm bedded on top of wall.Timber to be SC3 grade and use a min. length of 3m and half-lap plates at joints and corners..Provide anchor straps as described in notes elsewhere.

LATERAL RESTRAINT STRAPS
Tie roof structure to blockwork wall with 30X5 galvanised mild steel straps at max 1.8m ctrs where rafters and ceiling joists run parallel to blockwork walls.Also fit at max 1.8m ctrs to anchor wallplate to blockwork wall with 5no. 5mm x 900mm galv straps or equal.


SHDC
PLANNING & DEVELOPMENT
17 NOV 2003
Ref. 1413/03
REV DESCRIPTION
DETERMINED PLAN




PROPOSED FRONT ELEVATION
Scale 1:100



PROPOSED SIDE ELEVATION
Scale 1:100



PROPOSED REAR ELEVATION
Scale 1:100

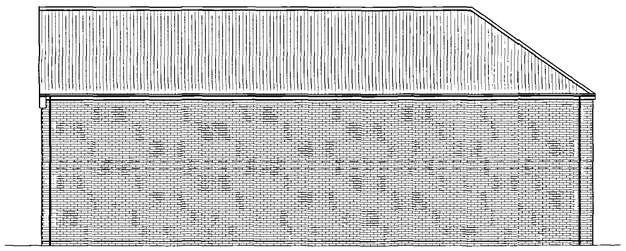

PROPOSED SIDE ELEVATION
Scale 1:100

GENERAL CONDITIONS
Contractors are reponsible for checking all dimensions on site when work commences and before ordering any materials.Any discrepancies should be brought to the attention of the Client for remedial action before commencing further.

All details shown are based on typical site conditions for that area, any abnormal conditions should be brought to the attention of the Client and Local Authority.

The notes shown are mainly to cover the requirements of Building Regulations and should not be treated as full specification.

No allowance has been made for any Structural Calculations,a "SAP" calculation, Soil Investigation or Flood Risk Assessment.If deemed necessary then these will be a chargeable extra.All steel beam sizes shown on drawing are all subject to confirmation from Structural Engineer.

All materials not specified to be of a standard suitable for the work proposed and be fit for purpose.All work to be in accordance with

remway design
Plans drawn for: Local Authority - Planning permission & Building Control.
3, Rembrandt Way
Spalding
Lincs
PE11 3HX
Tel: 07815 112 058
Fax: 01775 768 921
e-mail: jason@remwaydesign.co.uk

Project: Proposed Detached Garage Block with Office

Client: Barrowby Builders
Barrowby House
Northgate
West Pinchbeck
PE11 3TB