


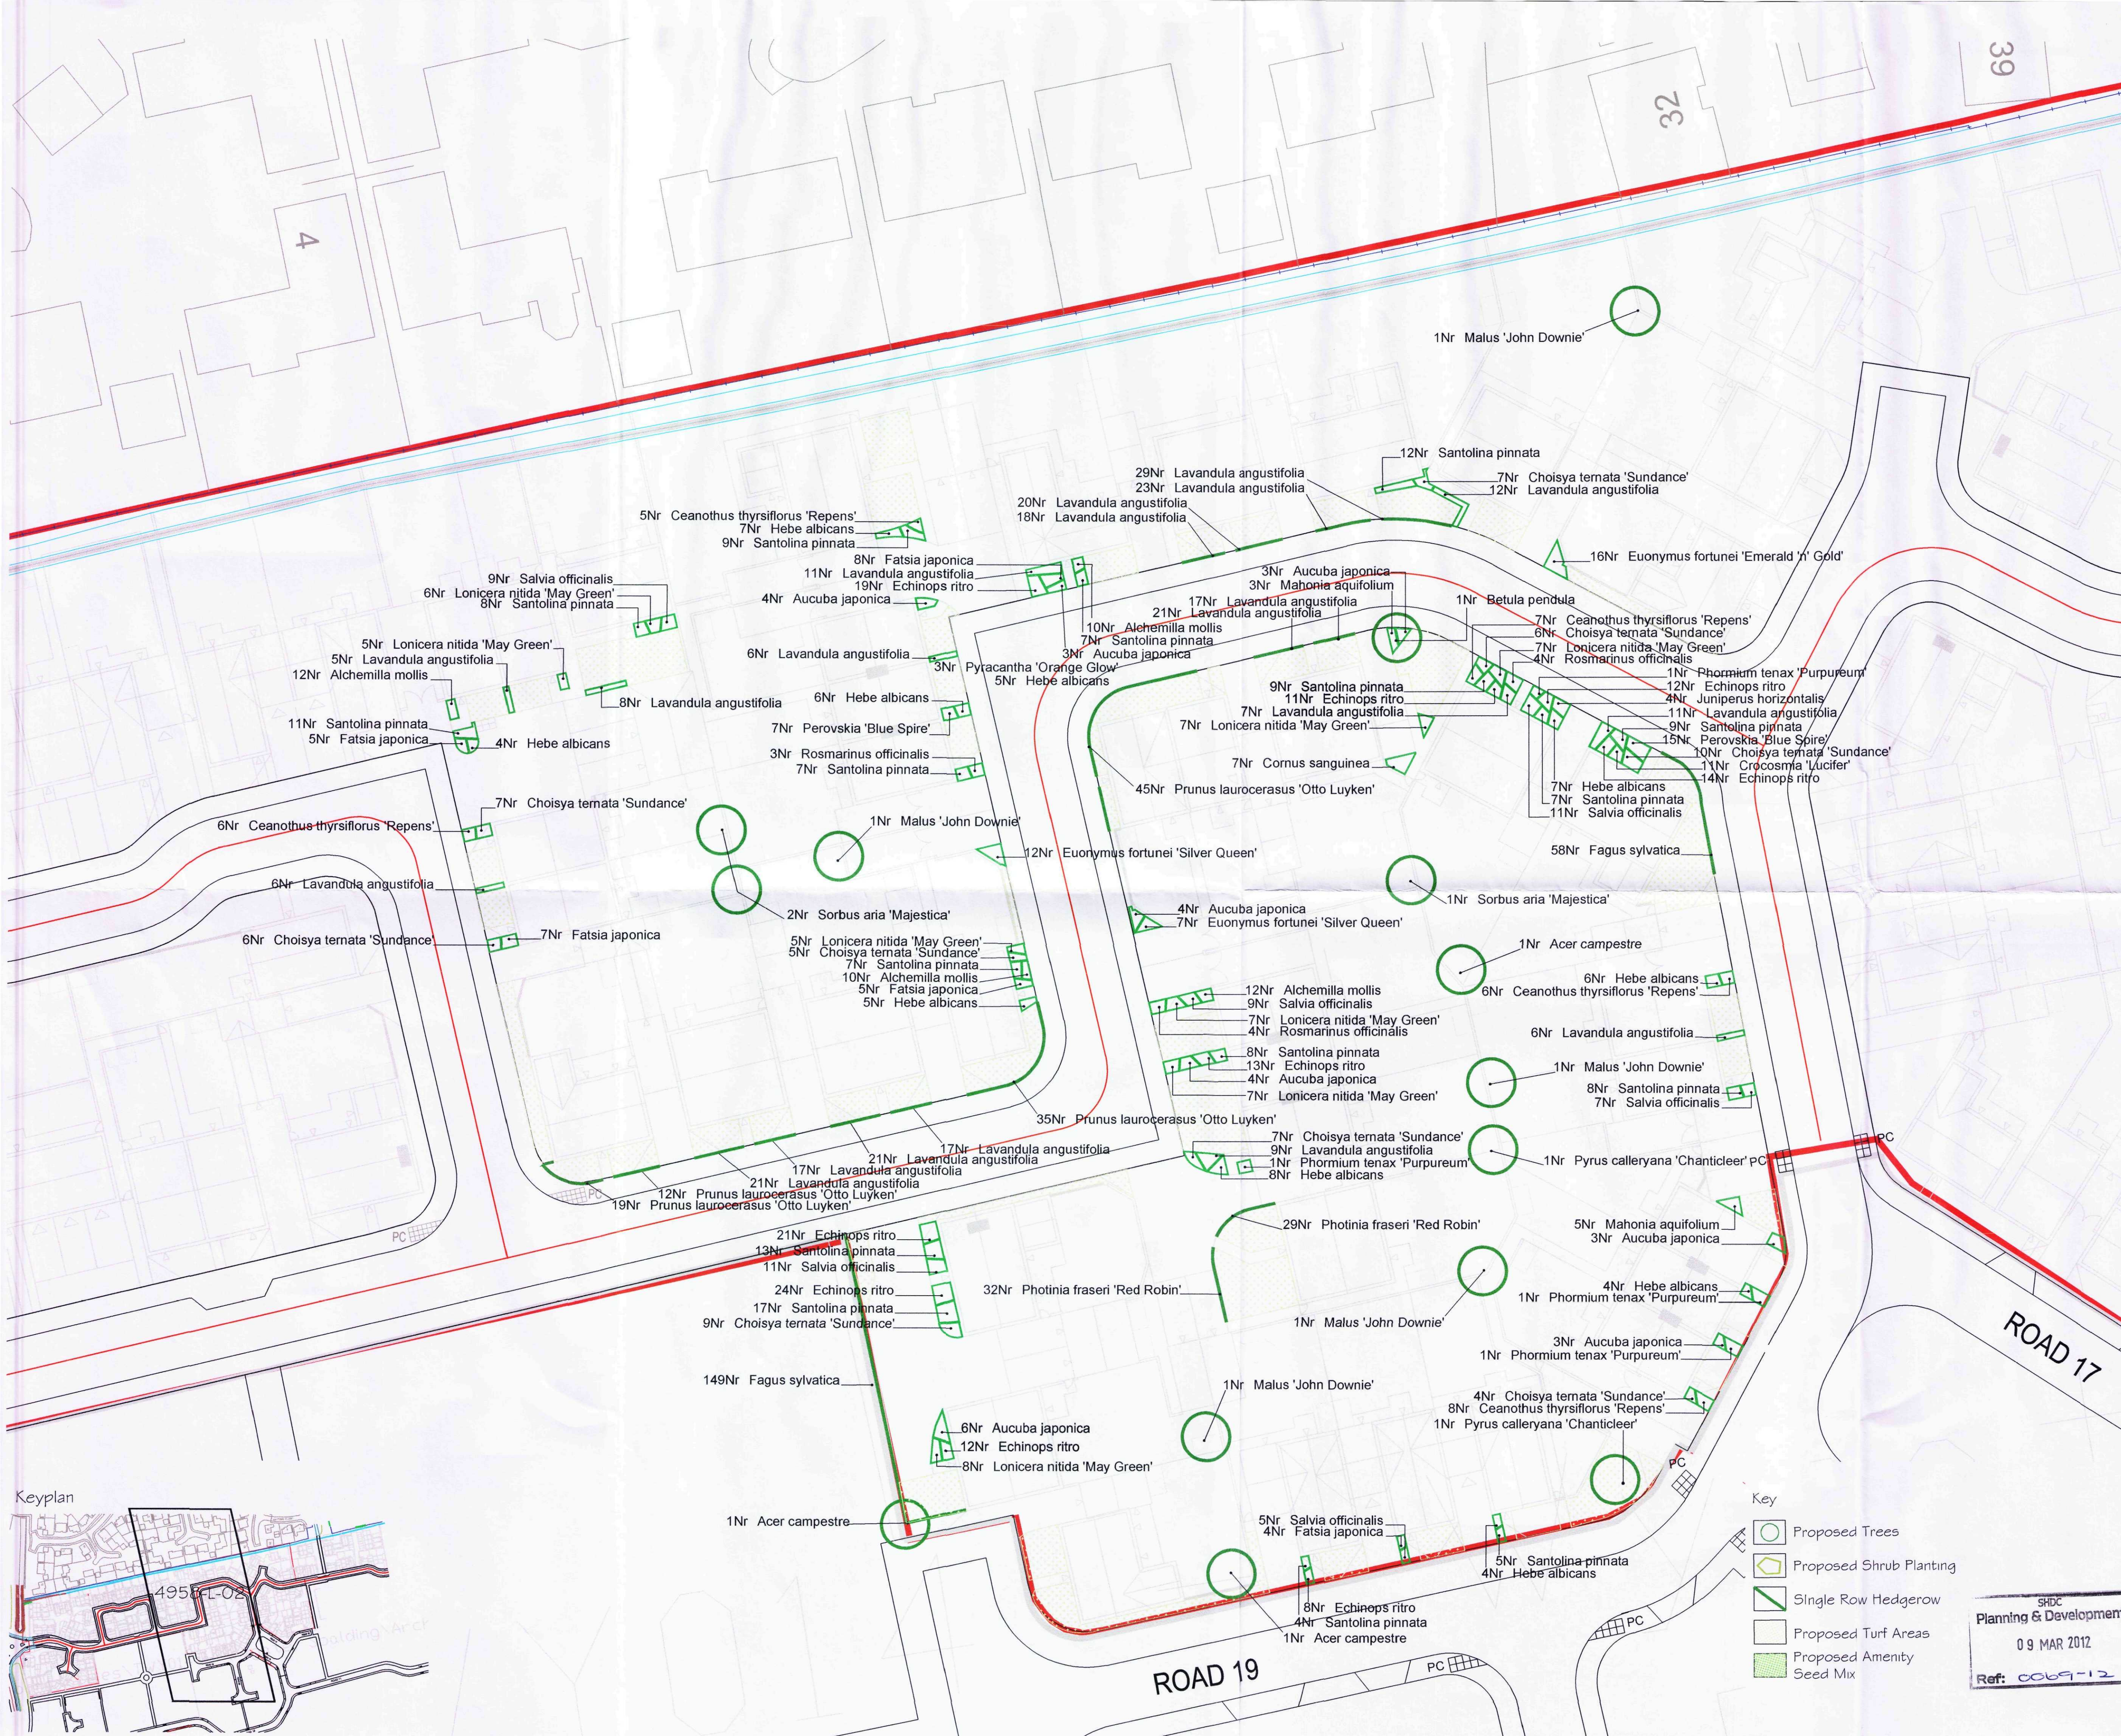

NOTES

All dimensions to be verified on site. Do not scale this drawing. All discrepancies to be clarified with project Landscape Architect.

This drawing is the property of FPCR Environment and Design Ltd and is issued on the condition it is not reproduced, retained or disclosed to any unauthorised person, either wholly or in part without written consent of FPCR Environment and Design Ltd.

Ordnance Survey material is used with the permission of The Controller of HMSO, Crown copyright 100018896.

All planting, turfing and seeding to be undertaken within the first planting season following the completion of construction of the development.

The landscape contractor will make himself aware of the service locations prior to commencing planting operations. Proximity of tree and shrub planting to services to be agreed with project engineer.

TOPSOIL

- At the time of starting work areas to be planted will be covered by either:
 - Undisturbed topsoil prepared as necessary by the Main Contractor so that it is a suitable state for the cultivation operations as stated below.
 - Topsoil to be 450mm for shrub planting.
 - Topsoil to be 150mm for turf.

IMPORTED TOPSOIL FOR PLANTED AREAS

- Provide as necessary to make up any deficiency of topsoil existing on site and to complete the work.
- To BS 3882, grade: General Purpose
- Source to be confirmed by the Contractor.
- Provide a declaration of analysis including information detailing each of the relevant parameters given in BS 3882, clause 6 and table 2 for the grade of topsoil specified.

CULTIVATION

- Break up any compacted topsoil to full depth.
- Within a few days before planting, but in suitably dry weather and ground conditions, cultivate top 300mm of all planting beds, using suitable plant to loosen, aerate and break up the soil into particles of 2-8mm.
- Spread well rotted organic material, subject to approval.
- Leave surface regular and even, with levels as required in Section D20 and within 50mm of levels specified on drawings.
- Remove weeds, perennial weed roots and undesirable material brought to the surface including stones and clots larger than 25mm in any dimension, roots, tufts of grass and foreign matter.
- Do not dig or cultivate within the root spread of trees and shrubs to be retained.

MATERIALS AND WORKMANSHIP

- Materials and workmanship shall generally be in accordance with the following documents:- BS3338 Nursery Stock and BS4228: Recommendations for General Landscape Operations.
- Plant material to be the sizes and dimensions as stated in the schedule and shall be healthy with good fibrous root systems.

HERBICIDES

- Allow for a pre-application of an approved translocated systemic herbicide to planting areas by suitable spraying apparatus to the manufacturer's instructions and in line with the 1997 Control of pesticides Regulations and 2003 COSHH.

PLANTING

- Retain existing grass where possible. Replace disturbed grass areas with new turf and topsoil.
- All ornamental shrubs or hedging plants to be planted in pits 150mm wider and deeper than their root ball.
- Pits to be back filled with topsoil and slow release fertiliser at an appropriate rate.
- All planted areas are to be mulched.
- All shrubs to be well watered in at the time of planting.

TREES

- All standard trees to be planted in tree pits @ 1000mm x 1000mm x 750mm.
- All trees to be back filled with top soil and suitable organic material (to be specified).
- All trees should be staked or double staked using pointed softwood / peeled chestnut / larch or oak stakes, free from projections and large or edge knots and tied above ground.
- All trees in shrub beds located within 3m of any services to have their roots directed downwards by the installation of Reroot 600 or Reroot 1000 dependent on ground conditions and service locations.

SINGLE ROW HEDGE PLANTING

- Locations stated on plan. Planted at 5 per linear meter

TREE WATERING

- Trees will be watered as necessary to ensure survival.

TURF

- To BS 3969, free from undesirable grasses and weeds.
- Supplier: Turfgrass Growers Association (TGA) member, to TGA quality standards.
- Appearance: A closely knit, continuous ground cover of even density, height and colour.
- Timing of laying in spring and summer to be within 18 hours of delivery, and autumn and winter to be within 24 hours of delivery.
- Turf to be general amenity grass to be approved by CA.
- All foot garden areas to be turfed, not seeded.

SEED

- Open spaces to be sown with mix as specified at a rate of 25g per meter square.
- Grass areas to be adopted by the Local Authority shall benefit from the application of Fisons P55 or similar approved applied at a rate of 100g per square meter and raked into the soil surface except areas of wildflower grass seed mix which will not receive any fertiliser under any circumstances.

MULCHING

- Material: Medium amenity Bark mulch (10-50mm) to be approved by CA.
- Purity: Free of pests, disease, fungus and weeds.
- Preparation: Clear all weeds. Water soil thoroughly.
- Coverage: 50mm depth.
- Finished level of mulch: 50mm below adjacent grassed or paved areas.

GENERAL MAINTENANCE

- Maintenance operations to be drawn up and agreed between Taylor Wimpey and the landscape contractor as appropriate to this scheme.

Refer to drawings 4958 L01 for planting schedule

AMENDED PLAN
Ref. A1

A	07.03.2012	Updated layout	KAD
rev	11.11.2011	First issue.	PmJ
rev	date	description	by

masterplanning
environmental assessment
landscape design
urban design
ecology
architecture
arboriculture

fpcr

client
Taylor Wimpey

project
Land at Wygate, Spalding

drawing title
Planting Proposals
2 of 3

scale
1: 250 @ A1

drawn
PmJ


date
March 2011

drawing number
4958 -L- 02

rev
A

SHDC
Planning & Development
09 MAR 2012
Ref: 0069-12

FPCR Environment and Design Ltd
Lockington Hall
Lockington
Derby DE74 2RH
t: 01509 672772
f: 01509 674665
e: mail@fpcr.co.uk
w: www.fpcr.co.uk

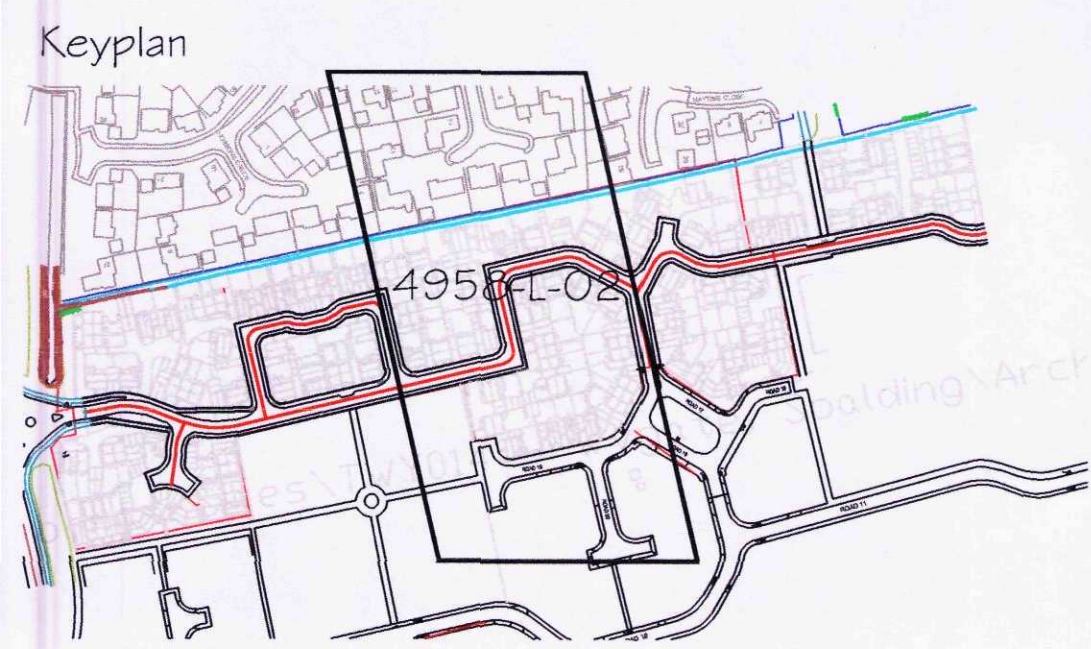

- Key
- Proposed Trees
 - Proposed Shrub Planting
 - Single Row Hedgerow
 - Proposed Turf Areas
 - Proposed Amenity Seed Mix