



CONTRACTOR TO TAKE NOTE: All existing and proposed dimensions are to be checked on site and any discrepancies to be notified immediately. Commencement of works on site will be deemed as all dimensions have been checked. Due to areas of the structure being covered, unexposed or otherwise inaccessible the existing / proposed dimensions / notes / specifications of existing materials are subject to confirmation of site when it is feasible to expose the relevant areas of construction. All material schedules are given in good faith and for pricing purposes only. It is the responsibility of the contractor to check their accuracy before ordering any materials. Remway Design accepts no responsibility for the accuracy of these material schedules.

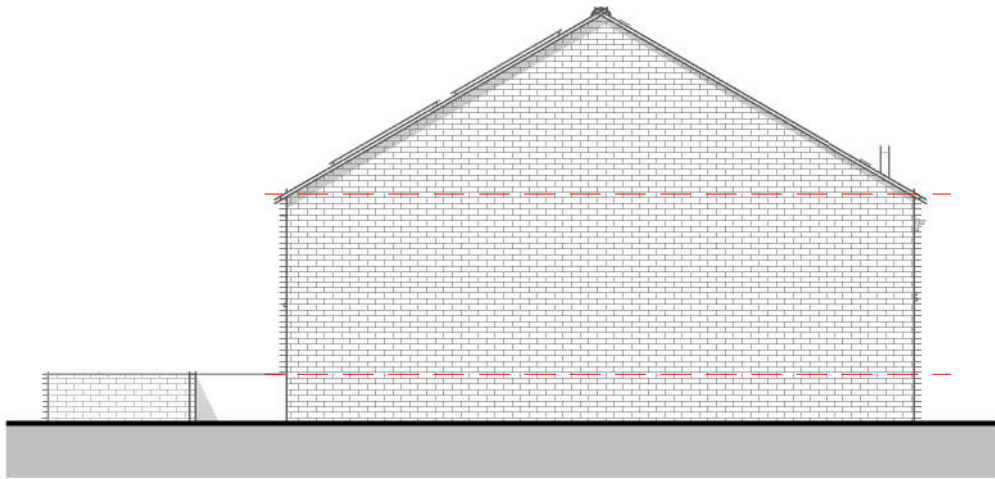

Elevation 01 - Front

1 : 100

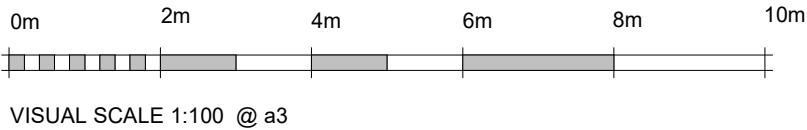


Elevation 03 - Rear

1 : 100

07 - Window Schedule		
(subject to site survey)		
Mark	Width	Height
W1	1248	1200
W2	1248	1200
W3	1810	1050
W4	1810	1050
W5	1248	1125
Grand total: 5		

08 - External Door Schedule		
(subject to site survey)		
Mark	Width	Height
ED1	1023	2100
ED2	2485	2100
ED3	2485	2100
Grand total: 3		

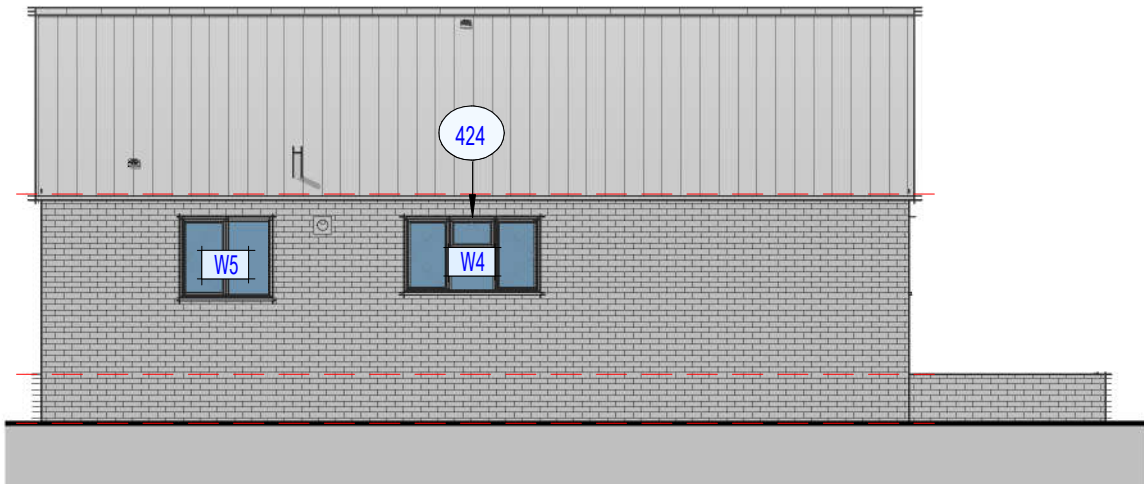

Elevation 02 - Right

1 : 100



Elevation 04 - Left

1 : 100

Filtered Keynotes	
Key Value	Keynote Text
351	Provide sloped access ramp and suitable approach to entrance door all as specification notes.
380	Keystone One Piece fully mitred and welded Structural Corner Lintel with steel post by Keystone Lintels Ltd. Details and calculations to be forwarded to LABC prior to work commencing
410	Solar Water Heating collectors (W) & Photovoltaic or solar electric panels(E) fitted in accordance with manufacturer's instructions and details to be forwarded to LABC for approval prior to insulation.
424	Refer to the "As Designed Air Flow Design Calculation" for all Trickle Ventilator requirements