


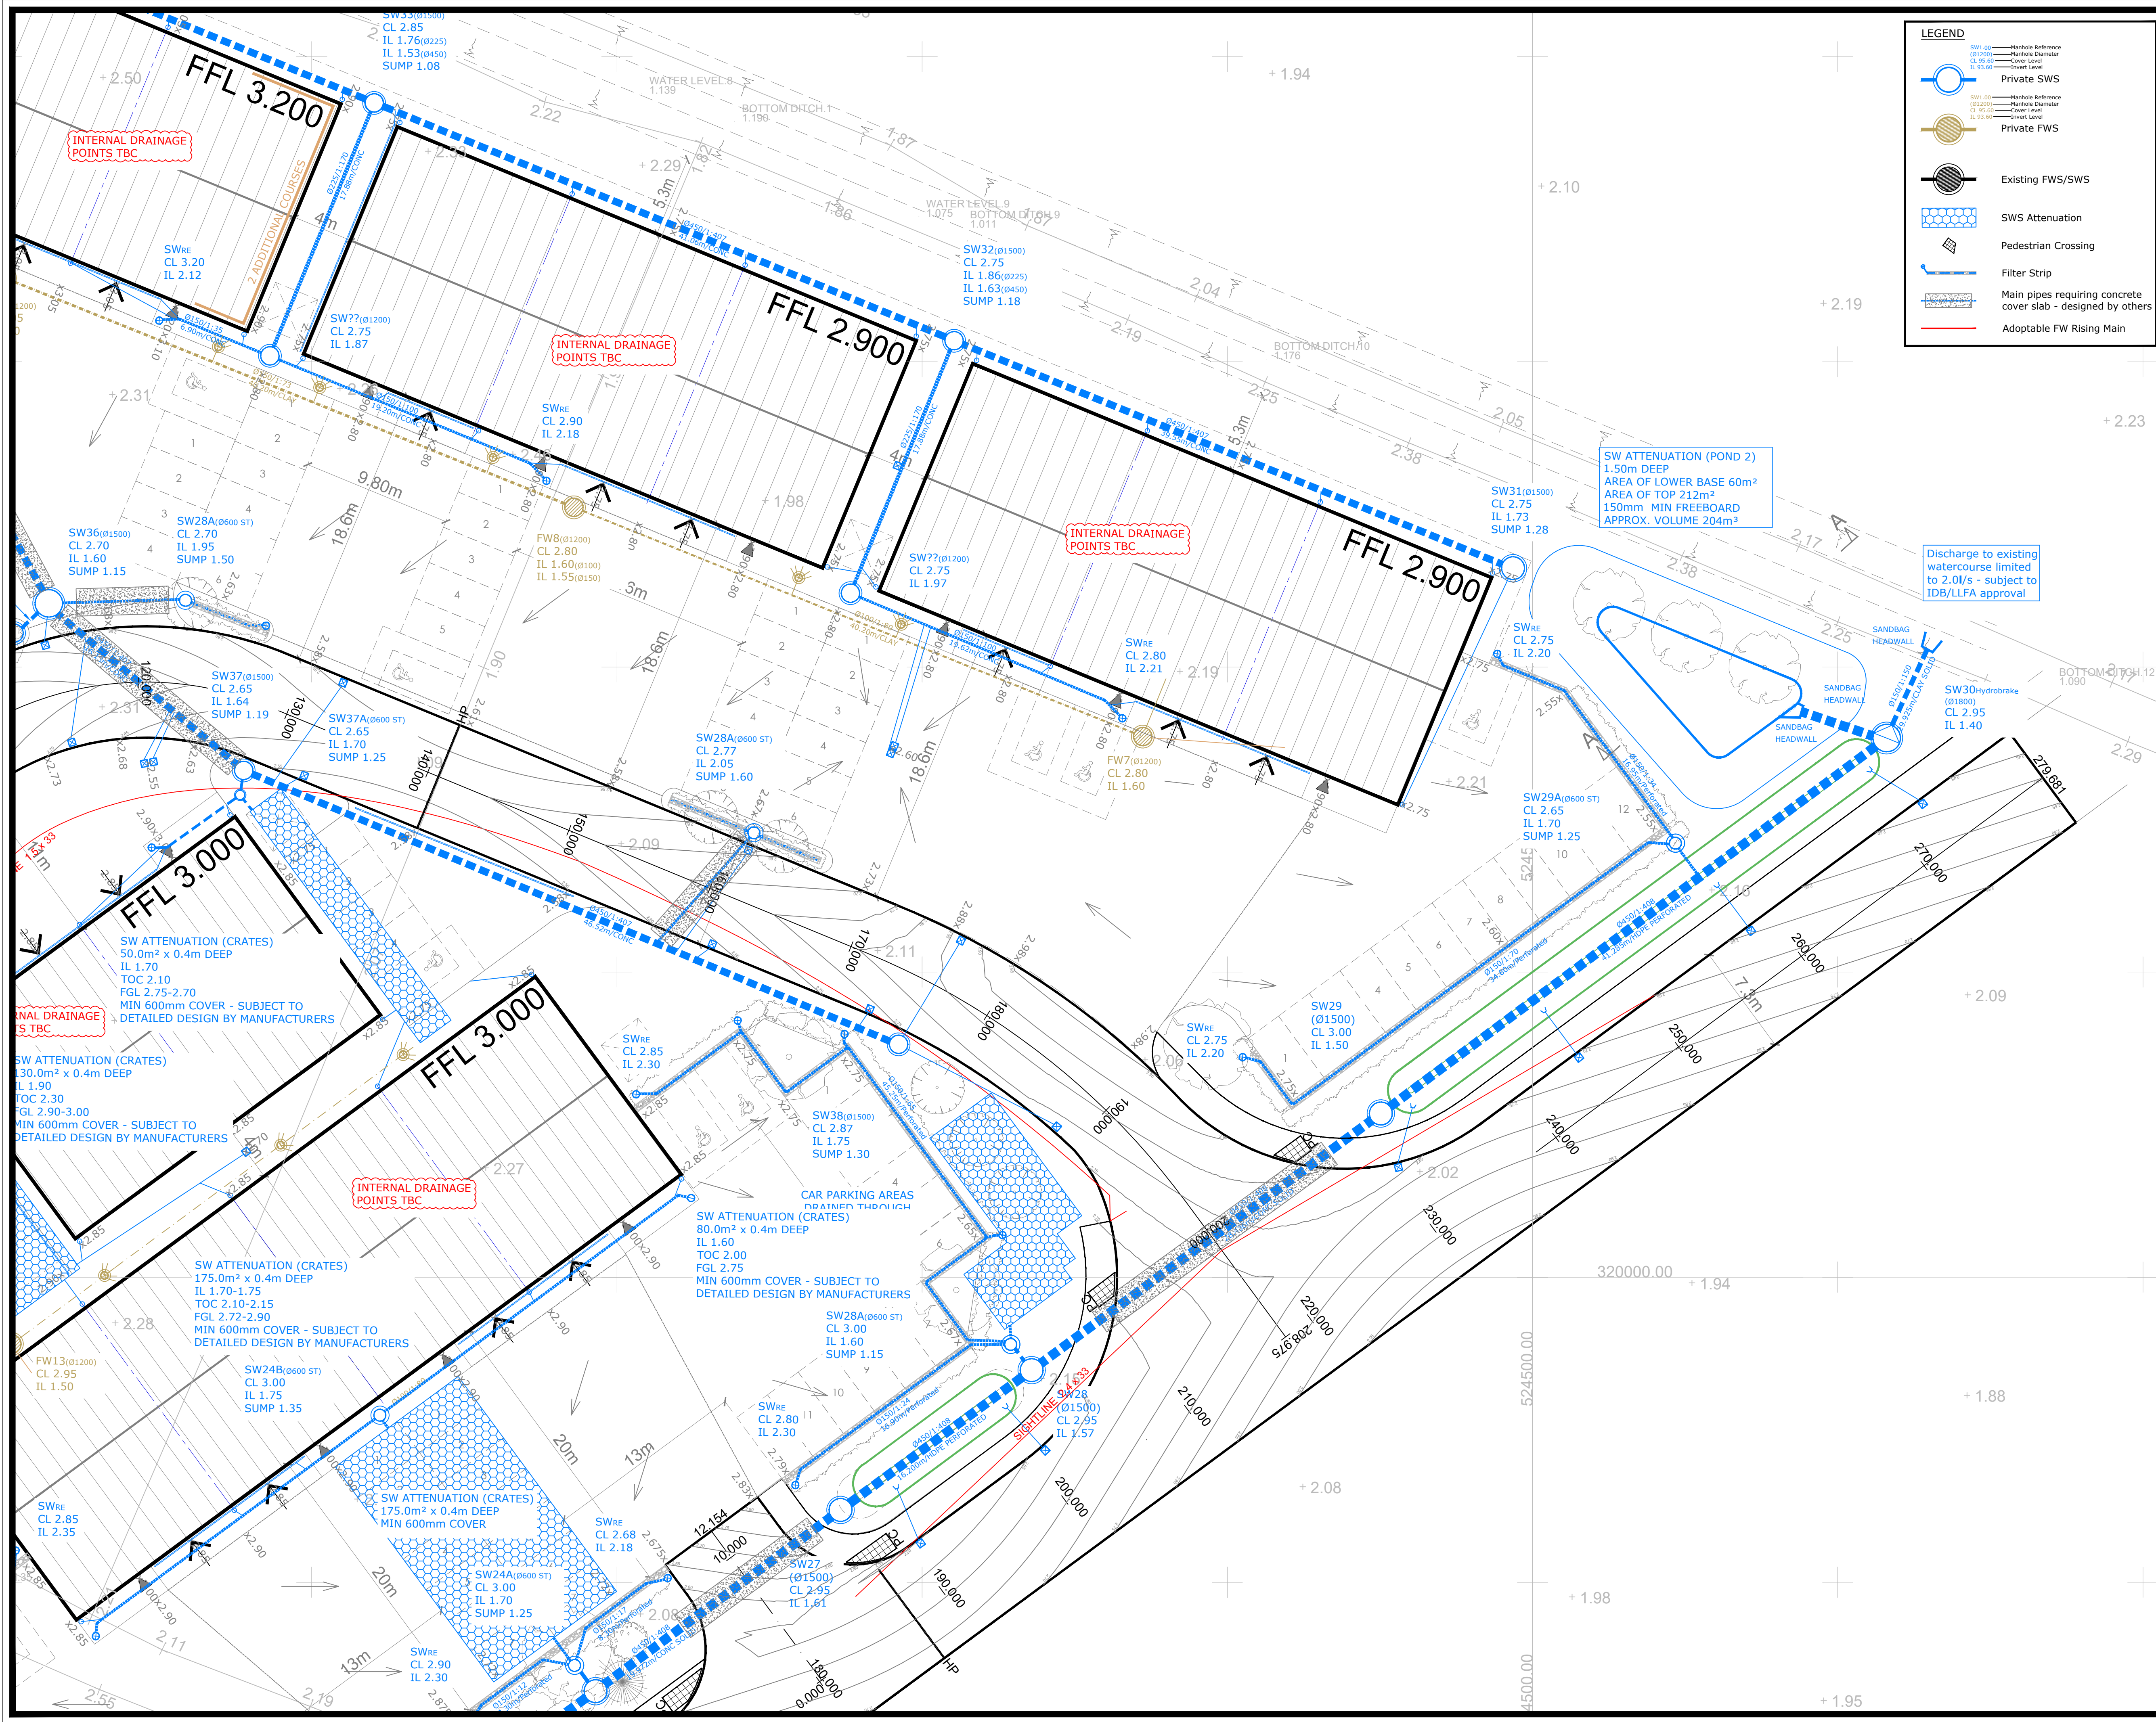

NOTES/LEGEND

PRIVATE CONSTRUCTION REQUIREMENTS

1. DO NOT SCALE FROM THIS DRAWING. WHILST THE DRAWING HAS BEEN PRODUCED DIMENSIONALLY, THE ACCURACY DURING REPRODUCTION CANNOT BE GUARANTEED;

2. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT DRAWINGS AND DOCUMENTS PRODUCED BY OTHERS, INCLUDING ENGINEERS, ARCHITECTS, AND SPECIALIST DESIGNS. FOR THE PURPOSES OF THIS DRAWING, THE FOLLOWING HAVE BEEN REFERENCED;

TOPOGRAPHICAL SURVEY: ALS 5957/500 SERIES, DATED JULY 21

ARCHITECTS LAYOUT: 96-PL-SL-01, DATED JULY 21;

LIN CONSULTING ACCEPT NO RESPONSIBILITY FOR THE INACCURACIES OF INFORMATION THAT IS PROVIDED BY THIRD PARTY;

3. ALL DIMENSIONS SPECIFIED ARE IN (MILLI)METERS AND ALL LEVELS ARE IN METERS (RELATING TO METERS ABOVE ORDNANCE DATUM WHERE AVAILABLE);

4. ANY DISCREPANCIES NOTED ON SITE ARE TO BE REPORTED TO THE ENGINEER IMMEDIATELY;

5. THE SPECIFICATION IN ALL RESPECTS SHALL BE IN ACCORDANCE WITH THE LINCOLNSHIRE COUNTY COUNCIL DEVELOPMENT ROAD AND SUSTAINABLE DRAINAGE SPECIFICATION AND CONSTRUCTION, **PLEASE NOTE THAT THE ROADS WILL NOT BE ADOPTED UNDER S38 AGREEMENT AND WILL REMAIN PRIVATELY MAINTAINED;**

6. THE CONNECTION TO THE S278 ENTRANCE BELLMOUTH HAS BEEN BASED UPON SURVEY LEVELS SUPPLIED AT TIME. THE CONTRACTOR SHALL CHECK ALL TIE-INS FOR LINE AND LEVEL PRIOR TO COMMENCEMENT OF WORKS. SHOULD ANY DISCREPANCIES BE FOUND THEN THE ENGINEER IS TO BE NOTIFIED IMMEDIATELY;

7. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO LOCATE EXISTING UTILITY APPARATUS. THE CLIENT WILL ACCEPT NO CLAIMS WHATSOEVER IN RESPECT OF ANY LOSSES OR DAMAGES CAUSED THROUGH CONSTRUCTION;

8. THE CONTRACTOR IS RESPONSIBLE FOR ENSURING THAT ALL WORKS ARE CARRIED OUT TO THE SPECIFICATION AND IS DEEMED TO HAVE INCLUDED WITHIN THEIR RATES FOR NECESSARY TESTING IN ACCORDANCE WITH ADOPTION PROCEDURES OF LCC;

9. IT IS THE CONTRACTOR'S RESPONSIBILITY TO UNDERTAKE THE WORKS AT ALL TIMES IN STRICT ACCORDANCE WITH THE HEALTH & SAFETY AT WORK 1974 AND THE CDM REGULATIONS 2015, AND WILL BE DEEMED TO HAVE INCLUDED WITHIN THEIR RATES;

10. ALL MATERIALS WITHIN 450mm OF FINISHED ROAD LEVELS ARE TO BE FROST SUSCEPTIBLE;

11. CBR TESTS TO BE CONDUCTED IN ACCORDANCE WITH LCC STANDARDS. FINAL SUB-BASE AND CAPPING REQUIREMENTS TO BE AGREED WITH ENGINEER PRIOR TO COMMENCEMENT OF WORKS. ALL SOFT SPOTS TO BE RECORDED AND REPLACED WITH SUITABLE GRANULAR MATERIAL - ENGINEER TO CONFIRM;

12. CONSULTATION WITH FRA 1034 01 R6, DATED MARCH 2011 INDICATES A CONTROLLED LEVEL OF 0.85M AOD FOR THE CLAY LAKE DRAIN. CONFIRMATION OF THIS LEVEL REQUIRED PRIOR TO DETAILED DESIGN;

13. CONNECTION POINT OF THE FW RISING MAIN HAS BEEN CONFIRMED BY ANGLIAN WATER. APPROVAL OF THE PUMPING STATION AND RISING MAIN ROUTE IS SUBJECT TO APPROVAL AND ADOPTION BY ANGLIAN WATER;

14. IN LIEU OF MODELLED WATER COURSE LEVELS ALL SW SEWERS HAVE BEEN MODELLED AGAINST A SURCHARGED OUTFALL OF 1.0m FOR THE 30yr AND 100yr (+30%) CLIMATE CHANGE EVENTS;

15. DISCHARGE RATES FOR THE 3 OUTFALLS ARE TO BE APPROVED IN WRITING BY THE IDB PRIOR TO COMMENCEMENT;

A	04/02/2022	ISSUED FOR COMMENT	ZJ	SON
Rev	Date	Description	Made	Checked
Status of Drawing: ISSUED FOR COMMENT				
Client				
Project				
Lincs Gateway Spalding				
Drawing Title				
ENGINEERING LAYOUT - SHEET 6 of 6				
LIN Consulting				
07301 337283 www.linconsulting.co.uk stuart@linconsulting.co.uk				
Drawn	Check'd	Approved	Scales	Drawing No.
ZJ	SON	SON	1:200	AKD/LG/105
Date				Rev
FEB 2022				A