



REAR ELEVATION




END ELEVATION(6)




END ELEVATION(8)




FRONT ELEVATION

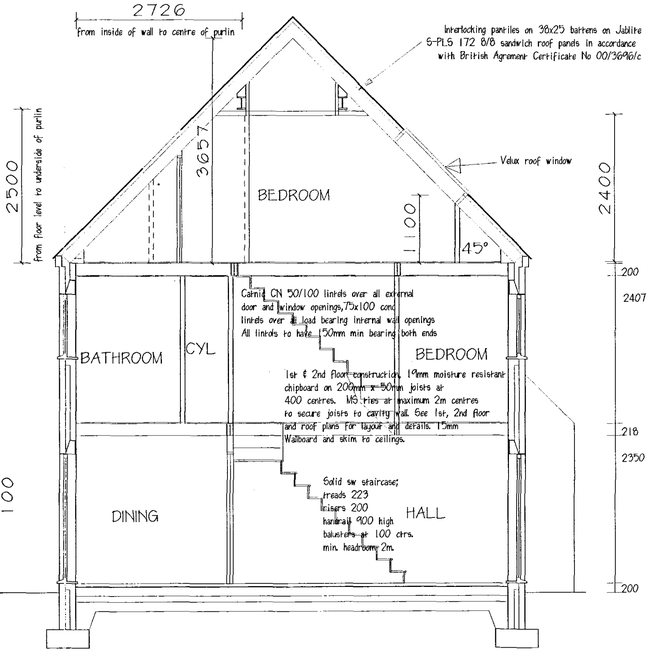


SECTION SYCAMORE

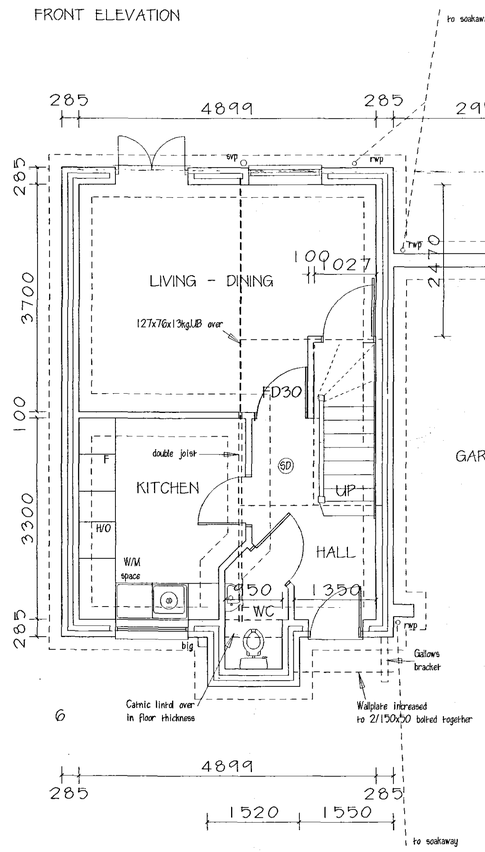


GROUND FLOOR

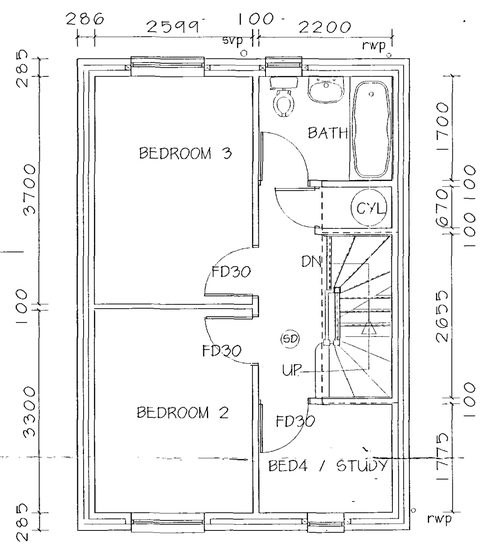

FIRST FLOOR

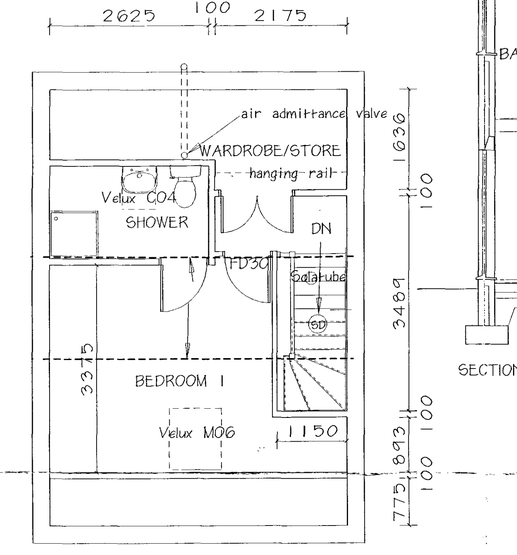

SECOND FLOOR

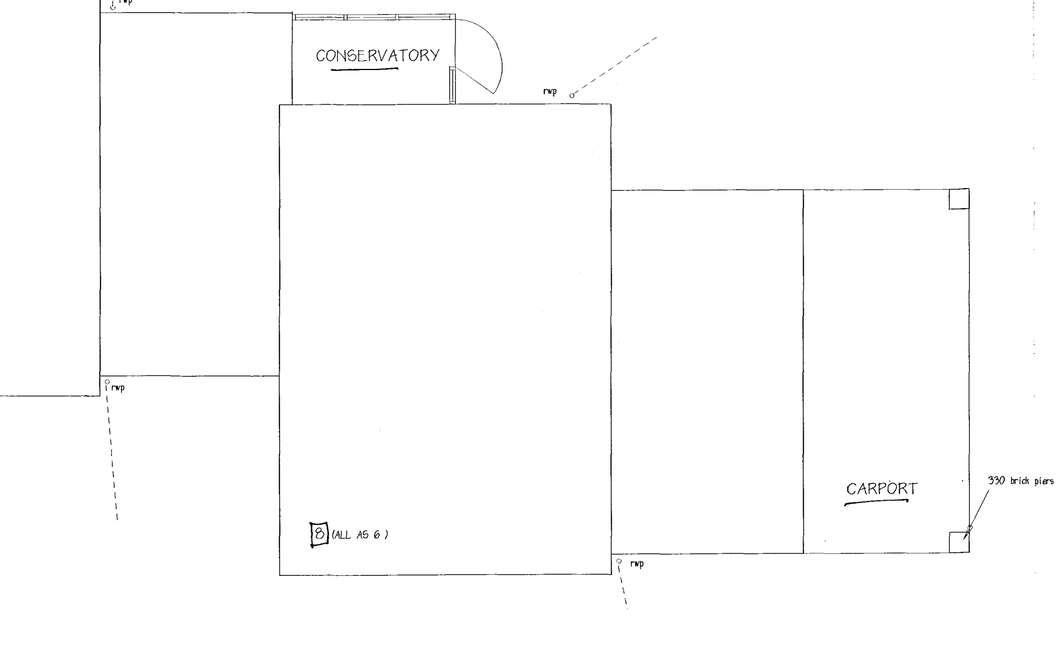

100mm outer facing brickwork,85mm cavity filled with bonded polystirene beads,100mm Celcon standard blocks, 15mm plaster.
All cavities closed at top.
Damcor vertical cavity closer as insulation and DPM

Fair DPM min 150mm above paving level lapped to DPM under slab.
Floor finish on 50mm sand cement screed on 150mm reinforced concrete slab on 1200g polythene DPM on sand blinded hardcore min 150mm thick.100mm expanded polystyrene insulation 225x700mm concrete strip foundationsmin 1000mm deep or on suitable load bearing stratum. Foundations backfilled with hardcore.

Walls below GFL 100mm brickwork with 85mm weak concrete filled cavity and 100 dense concrete block inner skin.450mm wide dpm bonded to 1200 polythene dpm.

PLANNING & DEVELOPMENT
16 FEB 2007
Ref. 07/116

M. PARKER
& SONS LIMITED
BUILDERS & CONTRACTORS
ST. JOHNS RD SPALDING LINCS PE11 1JX
FAX. 01775 762171 TEL. 01775 724777

PROPOSED RESIDENTIAL DEVELOPMENT
ST. JOHNS ROAD
SPALDING
TYPE -SYCAMORE
PLOTS 6, 7 & 8

SCALES 1:100 & 1:50
DRG. NO. SJRS/07 DATE 10/05

DETERMINED PLAN