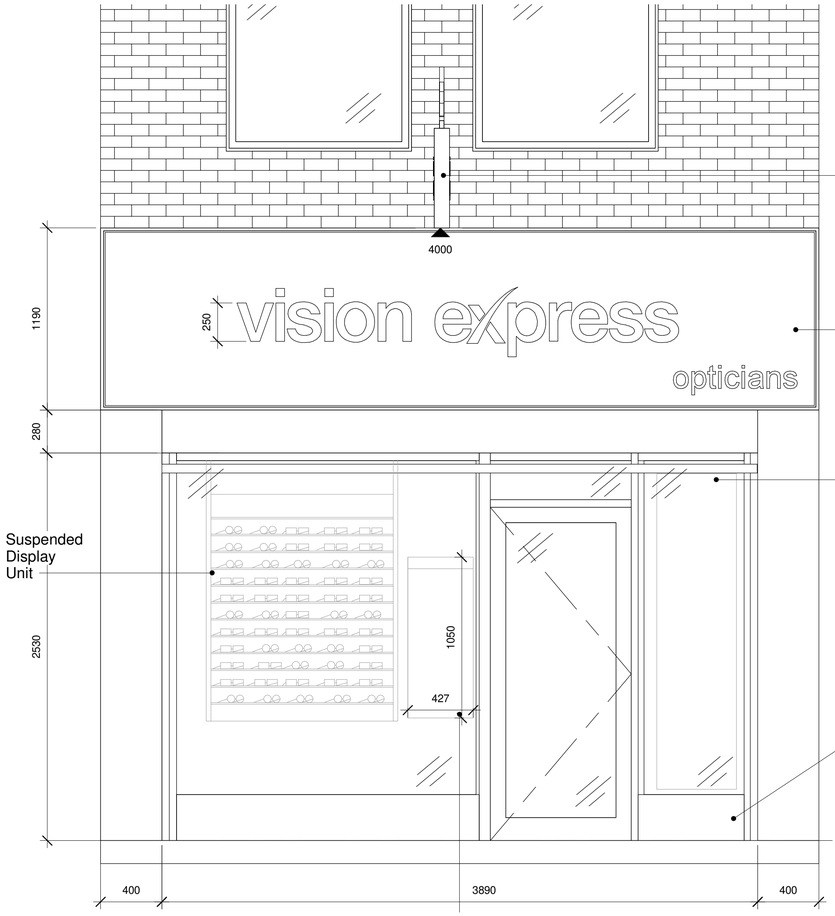


Existing herritage signage location (non illuminated). Vision Express brown black Pantone 440c. with pinned white acrylic lettering with the 'X' accented red.

Wooden fascia sign brand colour Vision Express Brown/Black Pantone 440c with white acrylic lettering with the 'X' accented red.

Internal hanging banner

Suspended Display Unit


Existing clear galzing to shopfront. All framing including doors Painted brand colour Vision Express Brown/Black Pantone 440c.

00 Ground Floor 0

Existing double sided vinyl POS. Internally applied.


1 Exisitng Front Elevation

1 : 20

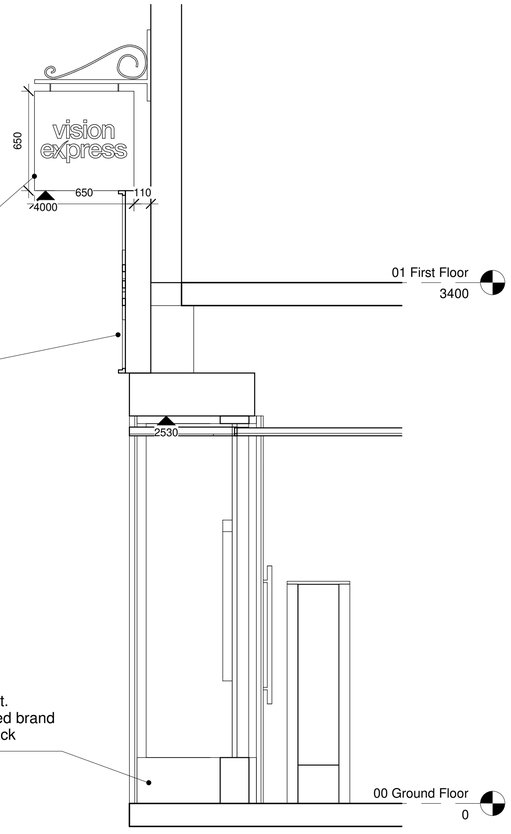

3 Existing Front Section

1 : 20

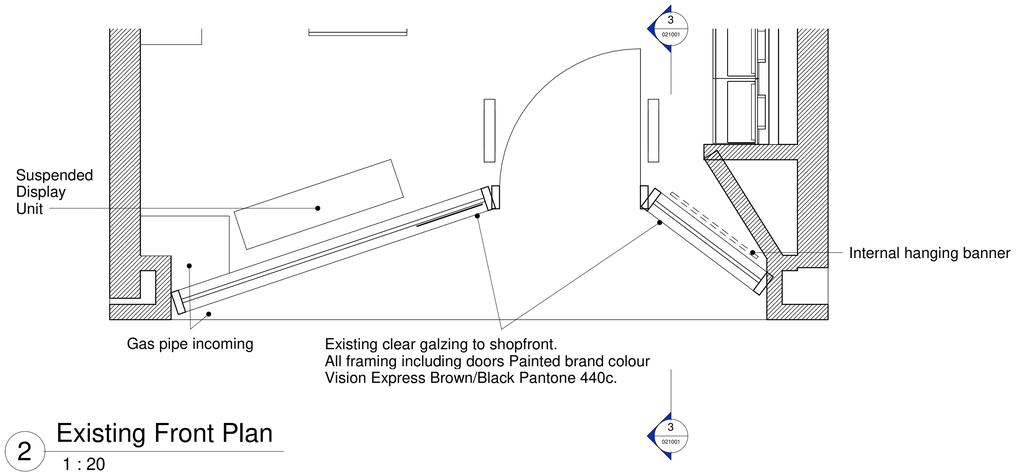

2 Existing Front Plan

1 : 20

- All dimensions to be checked prior to contractor starting on site
- All dimensions to be taken as finished dimensions
- All wall linings to be self supporting with the party walls preventing overturning
- All Glazing to be as per glazing specialists details and to comply with Approved Document K and all appropriate British standards
- All Wall & Ceiling finishes to be Class 0 surface spread of flame including shopfront

Accessibility

- All stores are designed to be fully accessible in accordance with DDA legislation
- The dispensing points to be used as low level service counter - see sections for dimensions

GENERAL NOTES

1 : 50

Existing Wall

Existing walls to be clad out. Finished face of plasterboard to be no more than 110mm from face of structural wall.

New 100mm o/a stud partition consisting of 75 x 50mm metal studs at 600mm centres with one layer of 12.5mm p/board to both sides, taped and jointed for decoration.
30minute wall to finish 200mm above the ceiling height.

New 100mm o/a stud partition consisting of 75 x 50mm metal studs at 600mm centres with one layer of 12.5mm p/board to both sides, taped and jointed for decoration. sound insulating quilt to be installed between studs.

New 125mm o/a stud partition consisting of 75 x 50mm metal studs at 600mm centres with two layers of 12.5mm p/board to both sides, taped and jointed for decoration to U/S slab.
1 hr wall to be full height and constructed to underside of soffit.

New 125mm o/a stud partition consisting of 75 x 50mm metal studs at 600mm centres with two layers of 12.5mm p/board to both sides, taped and jointed for decoration to U/S slab.
sound insulating quilt to be installed between studs.

New full height 150mm o/a stud partition consisting of 100 x 75mm metal studs at 600mm centres with two layers of 12.5mm p/board to both sides, taped and jointed for decoration.

New full height 150mm o/a stud partition consisting of 100 x 75mm metal studs at 600mm centres with two layers of 12.5mm p/board to both sides, taped and jointed for decoration. sound insulating quilt to be installed between studs.

WALL TYPES

1 : 50

0m 0.4m 0.8m 1.2m 1.6m 2m

SCALE BAR 1:20 @ A1

NOTES

-Do not scale from this drawing, except for planning purposes.
-Check all dimensions on site.
-Subject to survey.
-Subject to site inspection.
-Site boundary lines are indicative only.

Rev	Date	By	Description
C	01.03.19	JSVC	For Planning
B	14.02.19	JSVC	Drawings amendments
A	13.02.19	JSVC	Drawing amended
-	12.02.19	JSVC	Initial issue

Revision Schedule

VisionExpress Opticians

project
VISION EXPRESS
SPALDING

title
EXISTING FRONT ELEVATION

sheet number
021001

drawing status
PLANNING

contract no.	scale
	As indicated @ A1
client ref. VE	date 12.02.19
drawn by JSVC	checked by SAC

project no.	drawing number (originator - zone - level - type - role - sheet number)	revision
P18-177	CGL-Z1-EL-EL-A-021001	C

Child Graddon Lewis
architects & designers

Studio1
155 Commercial Street
Spitalfields
London E1 6BJ

T: +44 (0) 20 7539 1200
F: +44 (0) 20 7539 1201
E: hq@cgluk.com
www.cgluk.com

© Copyright Reserved. **Child Graddon Lewis** | architects & designers