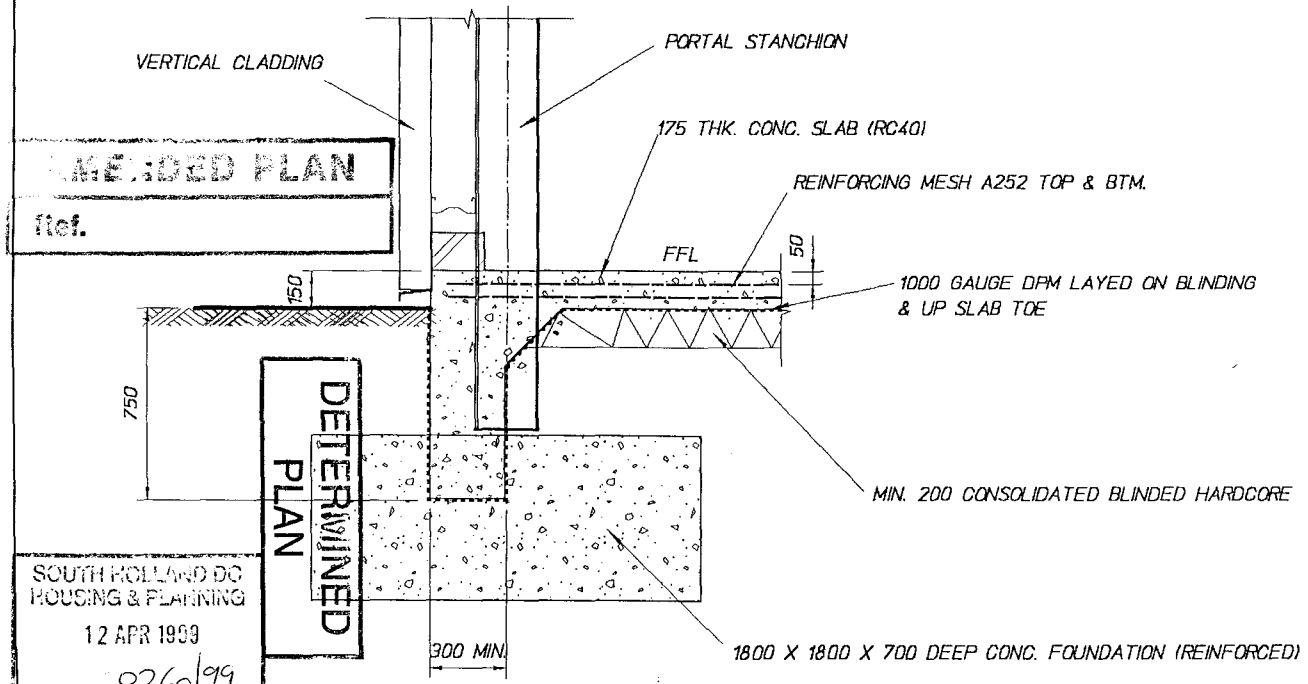


AMENDED PLAN

Ref.

DETERMINED PLAN


SOUTH HOLLAND DC
HOUSING & PLANNING
12 APR 1999
Ref: 026/99

TYPICAL SECTION THRO. PORTAL BASE FOUNDATION / FLOOR


GEEST PLC (WORLDWIDE FRUIT) DRWG. NO. 1801/2 A4

ALLOW TO FORM OPENING
IN THE EXISTING BUILDING
3600 SO. & PERSONNEL DOOR
PROVIDE LINTOLS / DOOR JAMBS ETC.


ALL EXISTING SERVICE LOCATIONS TAKEN FROM CORPORATE ARCHITECTURE LTD. DRWG. 001, PROJECT NO. 1552. APPROX. CABLE DEPTH 900 BELOW SURFACE

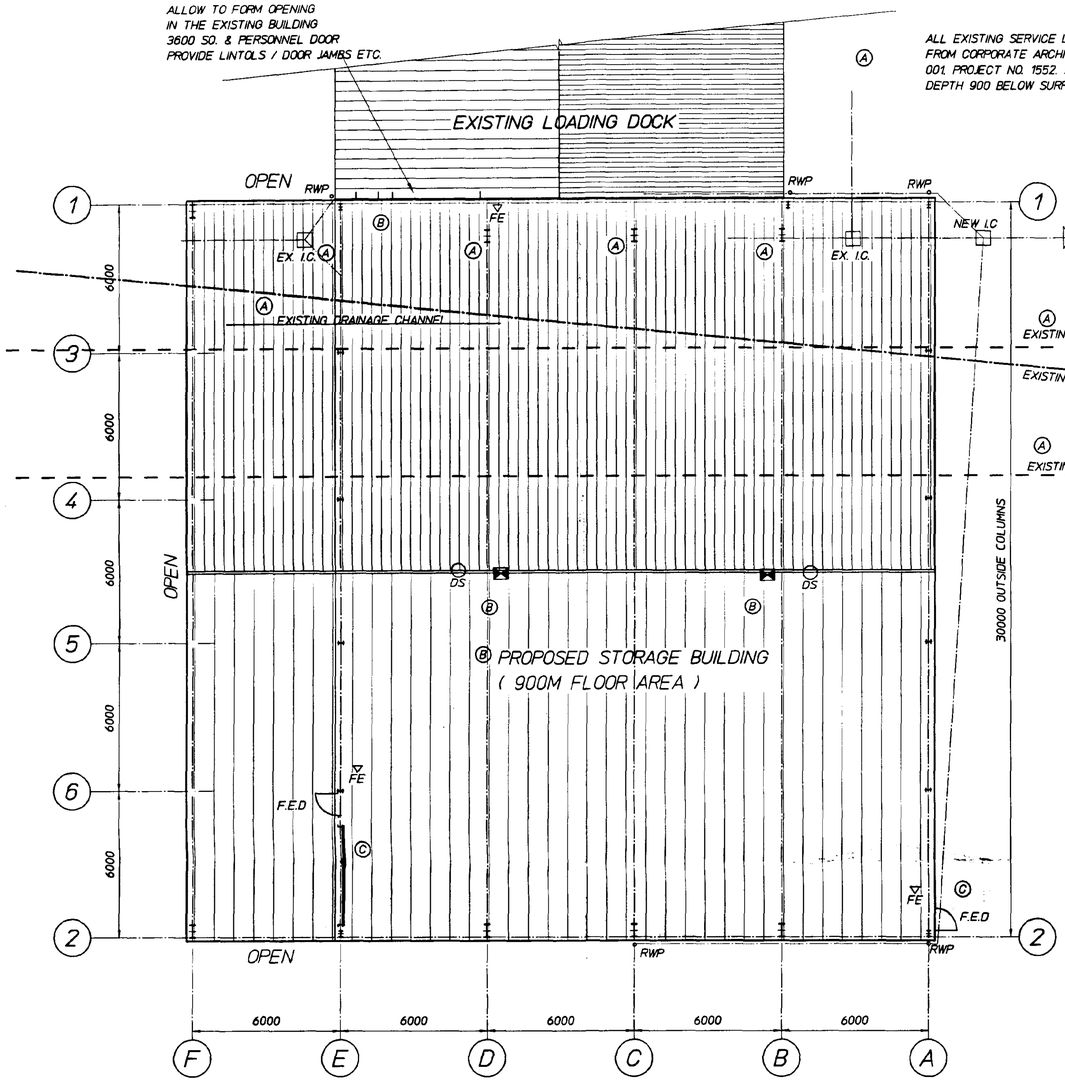


ROOF PLAN

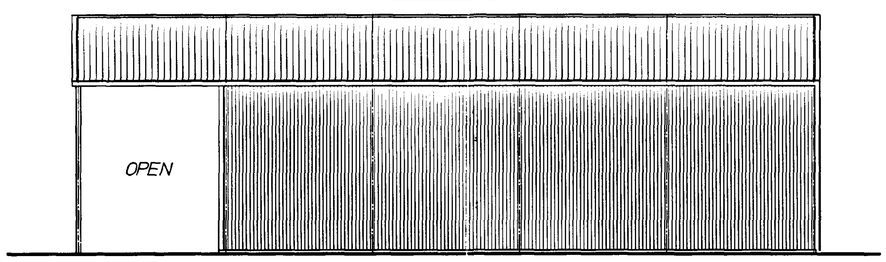


ELEVATION ON GRID LINE 2

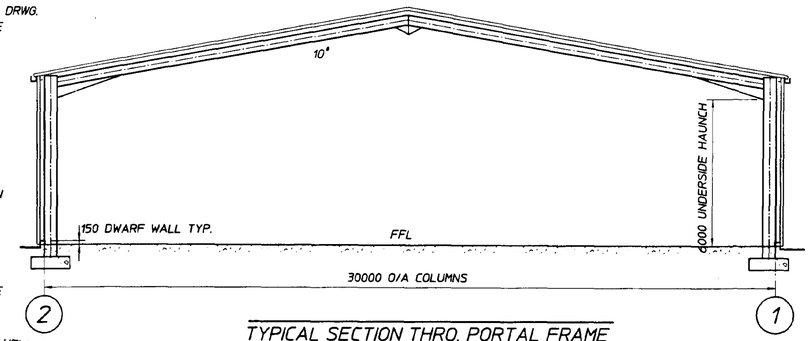


TYPICAL SECTION THRO. PORTAL FRAME

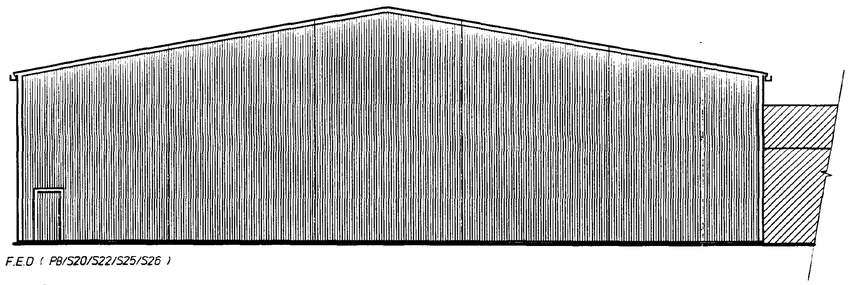

ELEVATION ON GRID LINE A

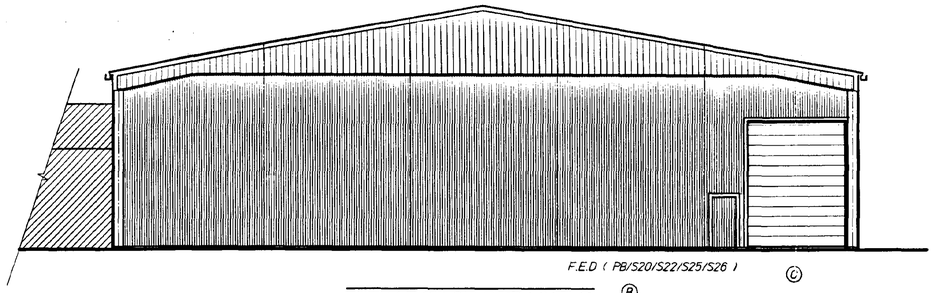

ELEVATION ON GRID LINE F

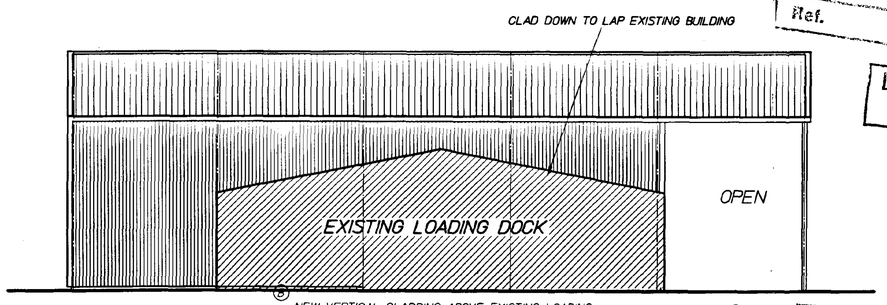

ELEVATION ON GRID LINE 1

Ref.

DETERMINED PLAN

SOUTH HOLLAND DC HOUSING & PLANNING 12 APR 1999 Ref: 0260/99

(B) ALL FIRE EXIT DOORS TO HAVE MIN. 800 CLEAR OPENING & SHALL HAVE LEVEL APPROACHES WITH NO SLOPE EXCEEDING 1 IN 20 CONC. APRON OUTSIDE MIN. 1000 SQ. FIRE EXIT DOORS TO OPEN OUT C/W PANIC BAR & SIGN 'PUSH BAR TO OPEN". ALL FIRE EXIT SYMBOLS ETC. TO BS 1635 : 1990 & BS 5499 PT1 1990.
IF MORE THAN 20 PEOPLE ARE TO BE EMPLOYED IN ANY ONE UNIT AN ELECTRICAL FIRE ALARM INSTALLATION IS TO BE INSTALLED SO AS TO BE CLEARLY AUDIBLE THROUGHOUT THE WHOLE UNIT WITH BREAK GLASS ACTIATING POINTS POSITIONED BESIDE EXIT DOORS.
FIRE FITTING EQUIPMENT SUPPLIED BY CLIENT.
FIRE EXTINGOUISHING INSTALATION & EQUIPMENT.
BS 5306 PT1 : 1976 HYDRANT SYSTEMS,HOSE REELS & FOAM INLETS
BS 5306 PT2 : 1990 SPECIFICATION FOR SPRINKLER SYSTEMS
IF THE PREMISES ARE TO BE USED DURING THE HOURS OF DARKNESS THEN SAFETY LIGHTING SHALL BE PROVIDED AS INDICATED ON THE PLAN.
FIRE FIGHTING EQUIPMENT & NOTICES WILL BE REQUIRED AS INDICATED
FIRE ALARMS IN ACCORDANCE WITH BS5839
EMERGENCY LIGHTING TO BE IN ACCORDANCE WITH BS 5266 PT1 1988

FIRE AUTHORITY TO BE CONSULTED REGARDING FIRE FIGHTING EQUIPMENT & ASSOCIATED MATTERS
PROVIDE SLOPING ACCESS TO ROLLER SHUTTER DOOR AS REQD
VENTILATION/HEATING DETAILS TO BE CONFIRMED

FE FIRE EXTINGOUISHERS TO BS5423
(B) LUMINARE EMERGENCY SELF CONTAINED
DS AUTOMATIC SMOKE DETECTORS

WARNING
THIS IS NOT A WORKING DRAWING DESIGN & SPECIFICATION CHECKS MUST BE CARRIED OUT BY THE CLIENT WITH HIS CONTRACTOR BEFORE ANY PART OF THE WORK IS COMMENCED.TO ENSURE THE CLIENTS REQUIREMENTS ARE SATISFIED.

DRG No. 1801/1 ©

D.A.GREEN & SONS LTD.
WHAPLODE, SPALDING,
LINCS, PE12 6TL.
Tel: 01406 370585.
Fax: 01406 370766.

ROOF CLADDING

PLASTIC COATED GALV. STEEL WEATHERING SHEETS
COLOUR : GOOSEWING GREY BS 10 A 05.
ALL LAPS SEALED IN MASTIC.83 THK. FIBREGLASS INSULATION LAID BETWEEN A SUPPORT BAR SYSTEM ON GALV. WHITE ENAMEL COATED STEEL LINER PANELS TO GIVE A U-VALUE OF 0.45W/m2oC,FIXED IN AN OVER PURLIN POSITION & C/W ALL NECESSARY FILLERS & FIXINGS

VERTICAL CLADDING

PLASTIC COATED GALV. STEEL WEATHERING SHEETS
COLOUR : VANDYKE BROWN BS 08 B 29.
DOWN TO LAP 150 HIGH BWK. TO ALL ELEVATIONS LEAVING OUT ONLY FOR DOORS & EXISTING BUILDING GABLE.83 THK. FIBREGLASS INSULATION ON SUPPORT BAR SYSTEM & GALV. WHITE ENAMEL COATED STEEL LINER PANELS TO GIVE A U-VALUE OF 0.45W/m2oC,FIXED INSIDE OF RAIL.CLAD DOWN TO LAP EXISTING BUILDING.

ROOFLIGHTS

APPROX. 20% OF DOUBLE SKIN

DOOR

5000 HIGH X 4000 WIDE SECTIONAL OVERHEAD DOOR

PERSONEL DOORS

3 NO. TOTAL (ALL WITH EXTERNAL OPERATION)
1 NO IN EXISTING BUILDING END
1 NO IN NEW FRONT GABLE
1 NO IN NEW REAR GABLE

ALL STEELWORK TO BE GALVANISED

	REVISIONS	BY	DATE
(C)	BUILDING REVISED TO SUIT CLIENTS INSTRUCTIONS	MJW	8/4/99
(B)	REVISED TO SUIT BUILDING CONTROL LETTER DATED 25/3/99	MJW	1/4/99
(A)	EXISTING SERVICES ADDED STAN. POSITIONS AMMENDED TO MISS EXISTING FOUNDATIONS. GRID LINE 1	MJW	15/3/99

SCALE	1/125	
DRAWN	MJW	26/2/99
CHKD		-


PROJECT
GEEST PLC (WORLDWIDE FRUIT)

SITE WEST MARSH ROAD,
SPALDING,
LINCS.


DETAILS
(B) PROPOSED STORAGE BUILDING
(900M FLOOR AREA)

GREEN
STRUCTURAL


DRG No. 1801/1 ©

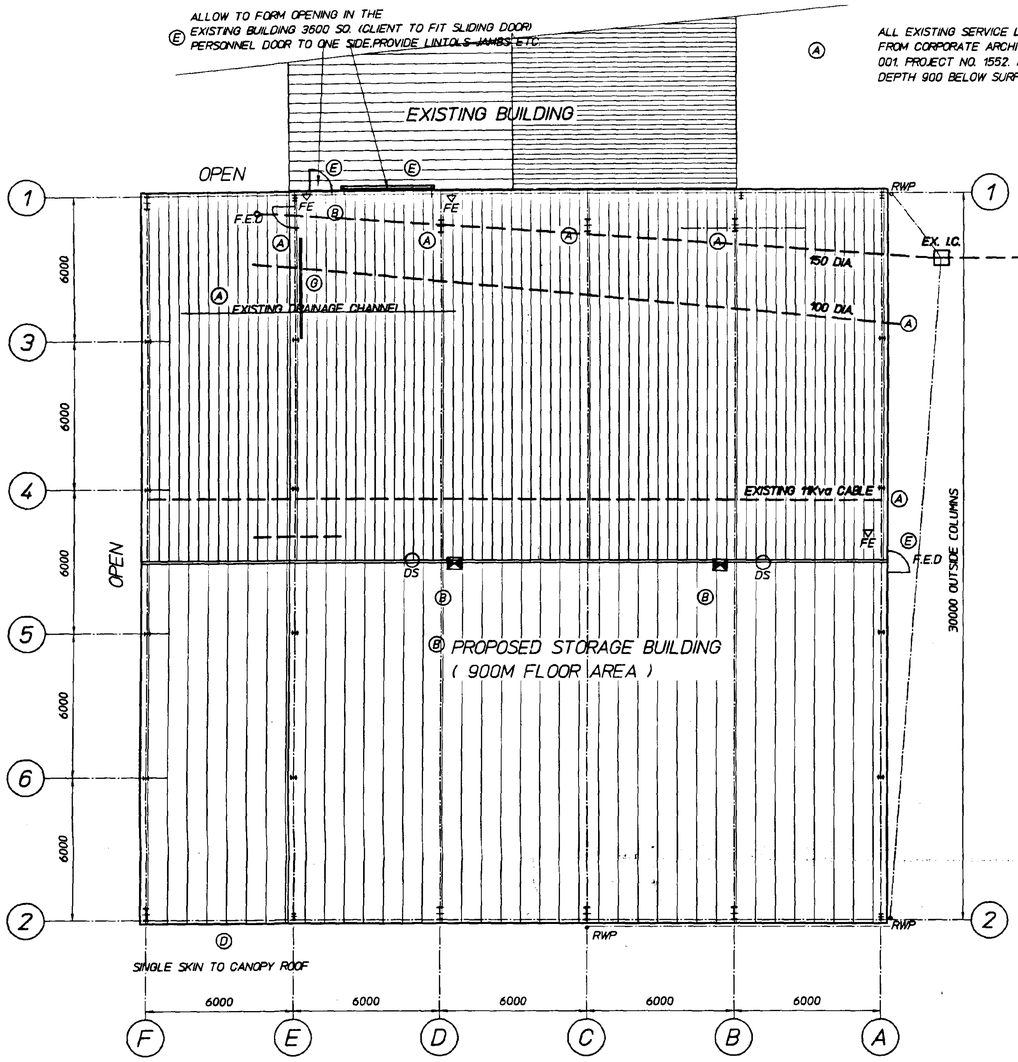


ROOF PLAN

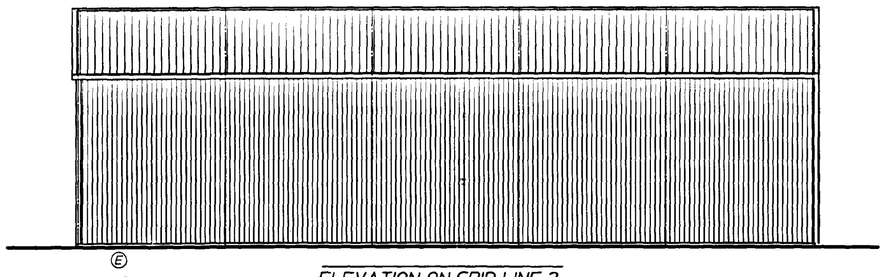

ELEVATION ON GRID LINE 2

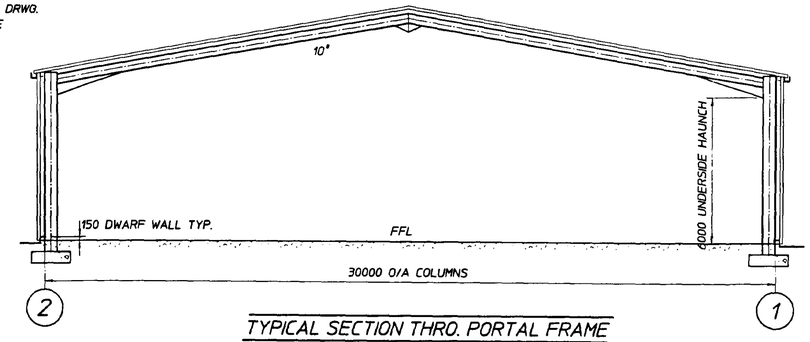


TYPICAL SECTION THRO. PORTAL FRAME

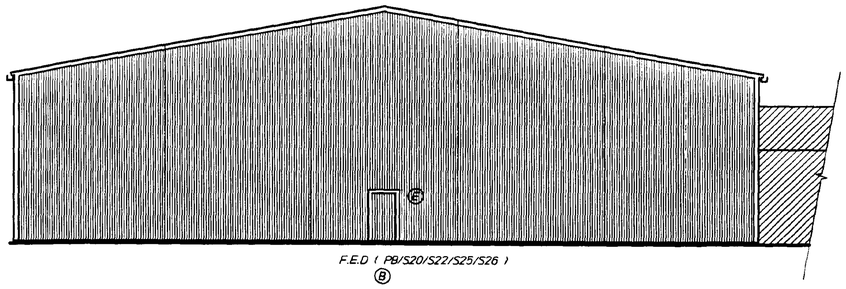

ELEVATION ON GRID LINE A

ELEVATION ON GRID LINE F

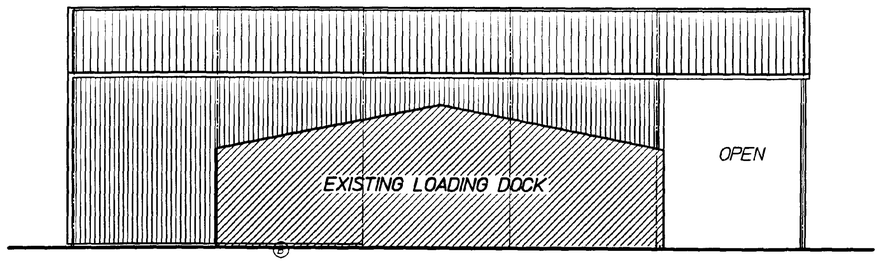

ELEVATION ON GRID LINE 1

(B) ALL FIRE EXIT DOORS TO HAVE LEVEL APPROACHES WITH NO SLOPE EXCEEDING 1 IN 20 CONC. APRON
OUTSIDE MIN. 1000 SQ. FIRE EXIT DOORS TO OPEN OUT C/W PANIC BAR & SIGN "PUSH BAR TO OPEN". ALL FIRE EXIT SYMBOLS ETC. TO BS 1635 : 1990 & BS 5499 PT1 1990.
IF MORE THAN 20 PEOPLE ARE TO BE EMPLOYED IN ANY ONE UNIT AN ELECTRICAL FIRE ALARM INSTALLATION IS TO BE INSTALLED SO AS TO BE CLEARLY AUDIBLE THROUGHOUT THE WHOLE UNIT WITH BREAK GLASS ACTIATING POINTS POSITIONED BESIDE EXIT DOORS.
FIRE FITTING EQUIPMENT SUPPLIED BY CLIENT.
FIRE EXTINGUISHING INSTALATION & EQUIPMENT.
BS 5306 PT1 : 1976 HYDRANT SYSTEMS,HOSE REELS & FOAM INLETS
BS 5306 PT2 : 1990 SPECIFICATION FOR SPRINKLER SYSTEMS
IF THE PREMISES ARE TO BE USED DURING THE HOURS OF DARKNESS THEN SAFETY LIGHTING SHALL BE PROVIDED AS INDICATED ON THE PLAN.
FIRE FIGHTING EQUIPMENT & NOTICES WILL BE REQUIRED AS INDICATED
FIRE ALARMS IN ACCORDANCE WITH BS5839
EMERGENCY LIGHTING TO BE IN ACCORDANCE WITH BS 5266 PT1 1988
FIRE AUTHORITY TO BE CONSULTED REGARDING FIRE FIGHTING EQUIPMENT & ASSOCIATED MATTERS
PROVIDE SLOPING ACCESS TO ROLLER SHUTTER DOOR AS REQD
VENTILATION/HEATING DETAILS TO BE CONFIRMED
(E) IF REQD NOMINAL BACKGROUND HEATING NOT TO EXCEED 50 WATTS PER SQ. MTRE

FE FIRE EXTINGUISHERS TO BS5423
(B) LUMINARE EMERGENCY SELF CONTAINED
DS AUTOMATIC SMOKE DETECTORS

SOUTH HOLLAND DC
HOUSING & PLANNING
21 MAY 1999
Ref: 0260/99

DRG No. 1801/1 (G)

D.A.GREEN & SONS LTD.
WHAPLODE, SPALDING,
LINCS, PE12 6TL.
Tel: 01406 370585.
Fax: 01406 370766.

ROOF CLADDING

PLASTIC COATED GALV. STEEL WEATHERING SHEETS
COLOUR : GOOSEWING GREY BS 10 A 05.
ALL LAPS SEALED IN MASTIC.83 THK. FIBREGLASS INSULATION LAID BETWEEN A SUPPORT BAR SYSTEM ON GALV. WHITE ENAMEL COATED STEEL LINER PANELS TO GIVE A U-VALUE OF 0.45W/m2oC.FIXED IN AN OVER PURLIN POSITION & C/W ALL NECESSARY FILLERS & FIXINGS

VERTICAL CLADDING

PLASTIC COATED GALV. STEEL WEATHERING SHEETS
COLOUR : VANDYKE BROWN BS 08 B 29.
DOWN TO LAP 150 HIGH BWK. TO ALL ELEVATIONS LEAVING OUT ONLY FOR DOORS & EXISTING BUILDING GABLE.83 THK. FIBREGLASS INSULATION
GALV. WHITE ENAMEL COATED STEEL LINER PANELS TO GIVE A U-VALUE OF 0.45W/m2oC,FIXED INSIDE OF RAIL.CLAD DOWN TO LAP EXISTING BUILDING.

ROOFLIGHTS
APPROX. 20% OF DOUBLE SKIN

DOOR
5000 HIGH X 4000 WIDE SECTIONAL OVERHEAD DOOR
PERSONEL DOORS
3 NO TOTAL (ALL WITH EXTERNAL OPERATION)
1 NO IN EXISTING BUILDING END
1 NO IN NEW FRONT GABLE
1 NO IN NEW REAR GABLE

REVISIONS	BY	DATE
(G) SECTIONAL / FIRE DOOR MOVED TO SUIT CLIENTS INSTRUCTION GRID LINE E	MJW	20/5/99
(F) RWP POSITIONS REVISED	MJW	26/4/99
(E) FIRE DOOR ON GRID A MOVED TO SUIT B.R NOTES ADDED/REVISED	MJW	23/4/99
(D) BAY BET. GRID 2E & 2F NOW CLAD	MJW	15/4/99
(C) BUILDING RE-POSITIONED,GABLE END NOW OPEN,DOORS MOVED.TO SUIT CLIENTS INSTRUCTIONS.	MJW	8/4/99
(B) REVISED TO SUIT BUILDING CONTROL LETTER DATED 25/3/99	MJW	1/4/99
(A) EXISTING SERVICES ADDED STAN. POSITIONS AMMENDED TO MISS EXISTING FOUNDATIONS. GRID LINE 1	MJW	15/3/99

SCALE	1/125	
DRAWN	MJW	26/2/99
CHKD		-

PROJECT
GEEST PLC (WORLDWIDE FRUIT)

SITE
WEST MARSH ROAD,
SPALDING,
LINCS.

DETAILS
PROPOSED STORAGE BUILDING
(900M FLOOR AREA)

GREEN
STRUCTURAL

DRG No. 1801/1 (G)

APPROVED PLAN