
H.M. LAND REGISTRY | LL72,510

ORDNANCE SURVEY PLAN REFERENCE	TF2422 TF2423	Scale 1/2500
COUNTY LINCOLNSHIRE	DISTRICT SOUTH HOLLAND	© Crown copyright

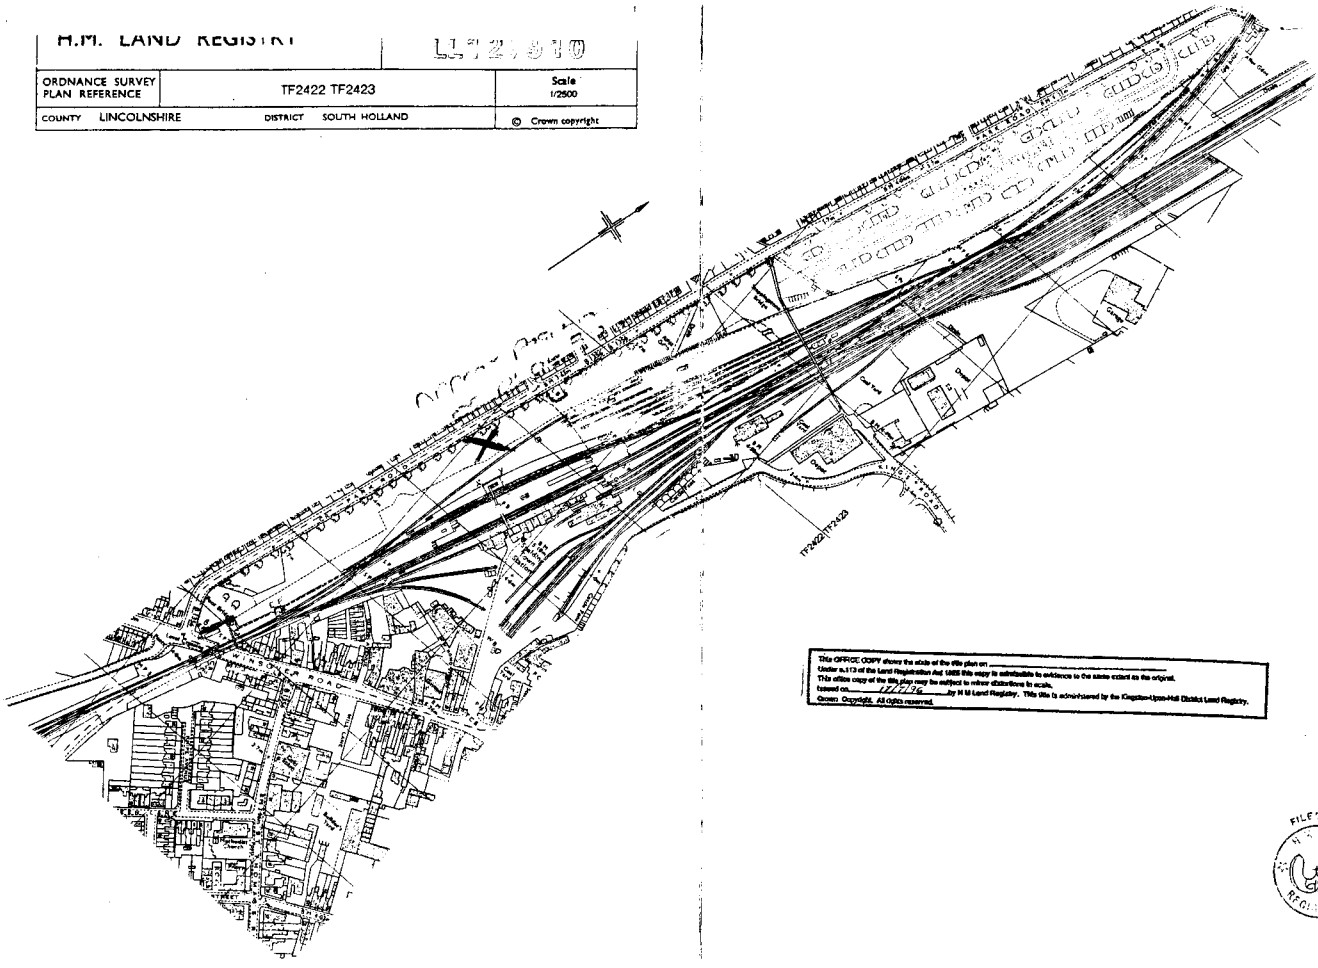

This OFFICE COPY shows the state of the title plan on _____
Under s.113 of the Land Registration Act 1925 this copy is admissible in evidence to the same extent as the original.
This office copy of the title plan may be subject to minor distortions in scale.
Issued on 12/2/96 by H.M Land Registry. This title is administered by the Kingston-upon-Hull District Land Registry.
Crown Copyright. All rights reserved.

FILED

PARK ROAD

PARK ROAD

GENERAL AMENDED	April 96	E
AMENDED TO SUITE OF CYCLEWAY ROUTE/PATH	April 96	D
GENERAL AMENDED	Jan 96	C
GENERAL AMENDED, FOOTPATHS AND ROAD LAYOUT AMENDED	July 95	B
AMENDED AND LAYOUT + SETTING OUT (AS SURVEYED)	Nov 95	A

No dimensions to be scaled from this drawing.
© Copyright reserved.

TREVOR BRIDGE ASSOCIATES
Landscape Architects

12 Grafton Street
Ashton-under-Lyne
Lancs OL6 6TQ

Tel: 0161-308 3765
Fax: 0161-343 3513


Project
PARK ROAD, SPALDING

WILCON DEVELOPMENT GROUP LIMITED

Title
LANDSCAPE PROPOSALS
SHEET 1 OF 2

Date	Drawn	Scale(s)	Drawing No.	Rev
Nov 95	JWP/DMC	1:200	747 02	E

CTA 1674B.DR

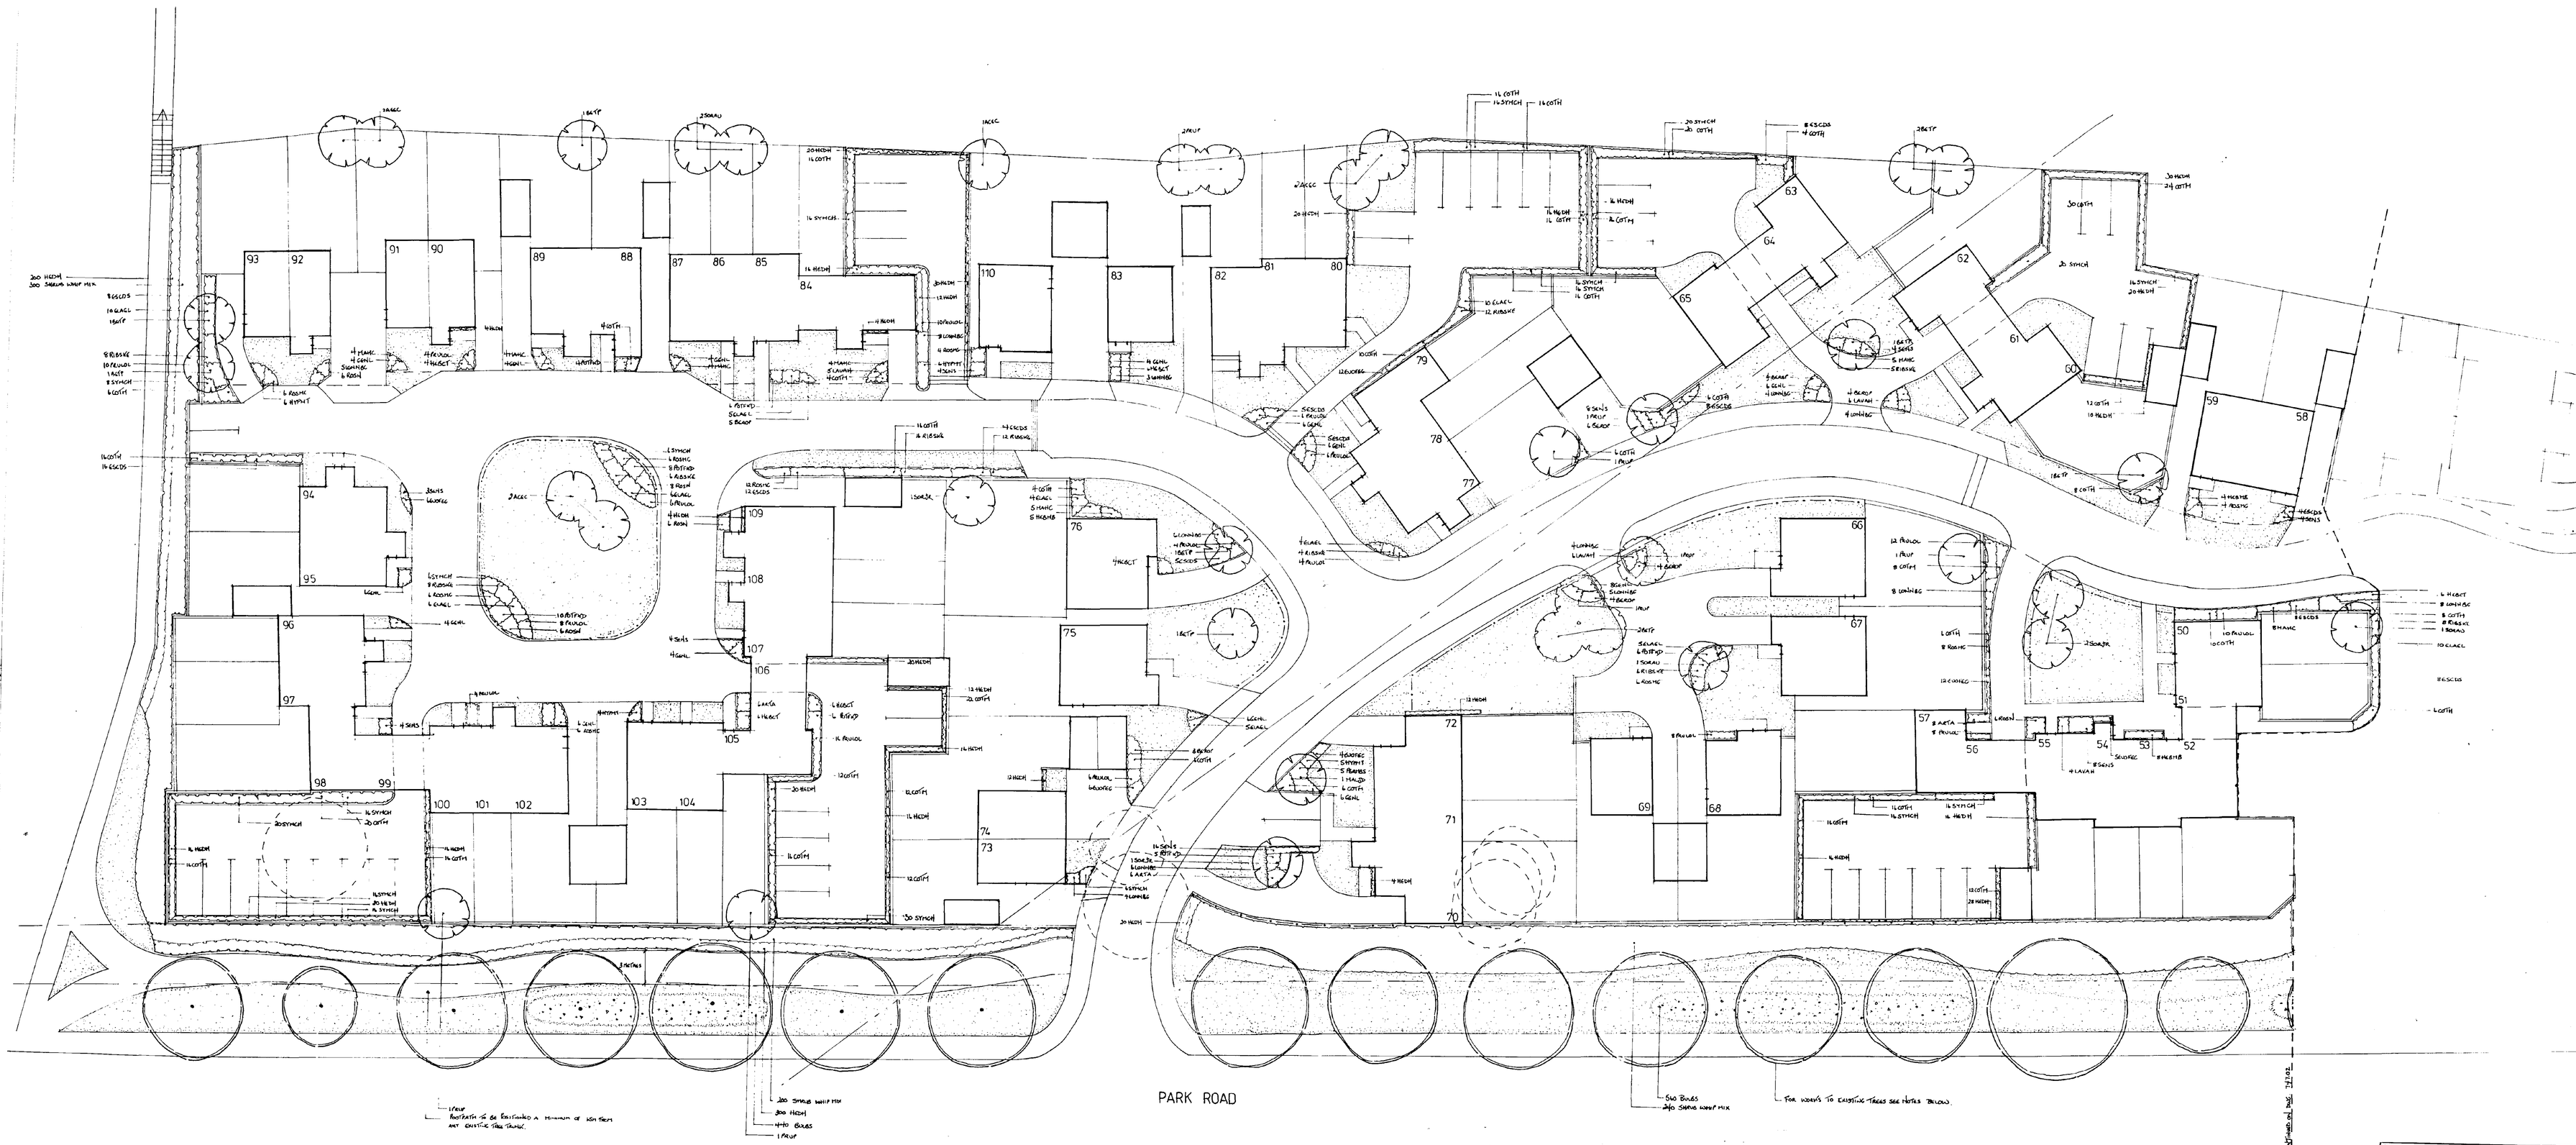

PLANTING SCHEDULE

KEY	SPECIES	SIZE	No.
TREES			
All trees to be feathered size 1.80 - 2.00m.			
ACEC	Acer campestre		19
BETP	Betula pendula		28
MALJD	Malus 'John Downie'		5
PRUP	Prunus padus		18
SORAU	Sorbus aucuparia		21
SORJR	Sorbus 'Joseph Rock'		12
SHRUB WHIP MIX			
All whips to be 60-90cm and planted in species groups of no more than 25, no less than 5 at 1 metre centres.			
	Corylus avellana		325
	Cornus sanguinea		225
	Euonymus europaeus		325
	Prunus spinosa		450
	Rosa arvensis		225
	Rosa canina		325
	Viburnum opulus		225
			2
HEDGE			
All whips to be 60-90cm and planted in a double row staggered at 500mm centres.			
	Crataegus monogyna		100
	Ilex aquifolium		100
SHRUB MIX			
All shrubs to be planted $2/m^2$ in species groups of no more than 10, no less than 5.			
	Berberis x ottawensis 'Purpurea'		100
	Cotoneaster horizontalis		144
	Elaegnus x ebbingei 'Limelight'		100
	Ribes sanguineum 'King Edward VII'		100
	Rosa 'Max Graf'		70
	Rosa 'Nozomi'		70

SHRUBS

ARTA	Artemisia arborescens	25-30 cm	54
BEROP	Berberis x ottawensis 'Purpurea'	40-60 cm	100
COTH	Cotoneaster horizontalis	40-60 cm	141
COTM	Cotoneaster microphyllus	30-40 cm	484
ELAEL	Elaeagnus x ebbingei 'Limelight'	30-40 cm	194
ESCDS	Escallonia 'Donard Seedling'	60-90 cm	210
EUOFEG	Euonymus fortunei 'Emerald & Gold'	25-30 cm	161
GENL	Genista lydia	30-40 cm	101
HEBCT	Hebe 'Carl Teschner'	25-30 cm	107
HEBMB	Hebe 'Midsummer Beauty'	30-40cm	31
HEDH	Hedera helix	60-90 cm	963
HYPMT	Hypericum moserianum 'Tricolor'	25-30 cm	75
LAVAH	Lavandula angustifolia 'Hidcote'	2 Litre	97
LONNBG	Lonicera nitida 'Baggesen's Gold'	30-40 cm	124
MAHC	Mahonia 'Charity'	30-40 cm	92
PERMBS	Pernettya mucronata 'Bells Seedling'	40-60 cm	60
POTFKD	Potentilla fruticosa 'Katherine Dykes'	30-40 cm	73
PRULOL	Prunus laurocerasus 'Otto Luyken'	40-60 cm	216
RIBSKE	Ribes sanguineum 'King Edward VII'	60-90 cm	175
ROSMG	Rose 'Max Graf'	30-40 cm	83
ROSS	Rose 'Nozomi'	30-40 cm	60
SENS	Senecio 'Sunshine'	30-40 cm	99
SYMCH	Symphoricarpos x chenaultii 'Hancock'	30-40 cm	346

BULBS

Bulbs to be planted at a rate of $10/m^2$

	Narcissus 'Golden Harvest'	1900
	Narcissus 'Mount Hood'	1900

WORK TO EXISTING TREES

1. Prune off all epicormic growth from base of trees, remove arisings to tip.
2. Crown lift all trees to 3.00m above ground level, remove arisings to tip.
3. Remove all dead, dying and diseased wood, remove arisings to tip.
4. Undertake test bore in bottom 1.00m of bole of lime trees and if any trees are found to be defective, fell, grind stump and remove arisings to tip.
5. Fell coppiced ash trees, grind stumps and remove arisings to tip (Adjacent to proposed access).

REPLACEMENT TREES

General arrangement	April '96
Amended to show line of proposed footpath	April '96
General alterations	July '96
Hidden detail removed, footpaths + fence lines re-surveyed, planting amended to reflect these changes and comments	Nov '96

No dimensions to be scaled from this drawing
© Copyright reserved

TREVOR BRIDGE ASSOCIATES
Landscape Architects
12 Grafton Street
Ashton-under-Lyne
Lancs OL6 6TG
Tel: 0161-308 3765
Fax: 0161-343 3513

Project
PARK ROAD, SPALDING

WILCON DEVELOPMENT GROUP LIMITED

Title
LANDSCAPE PROPOSALS
SHEET 2 OF 2