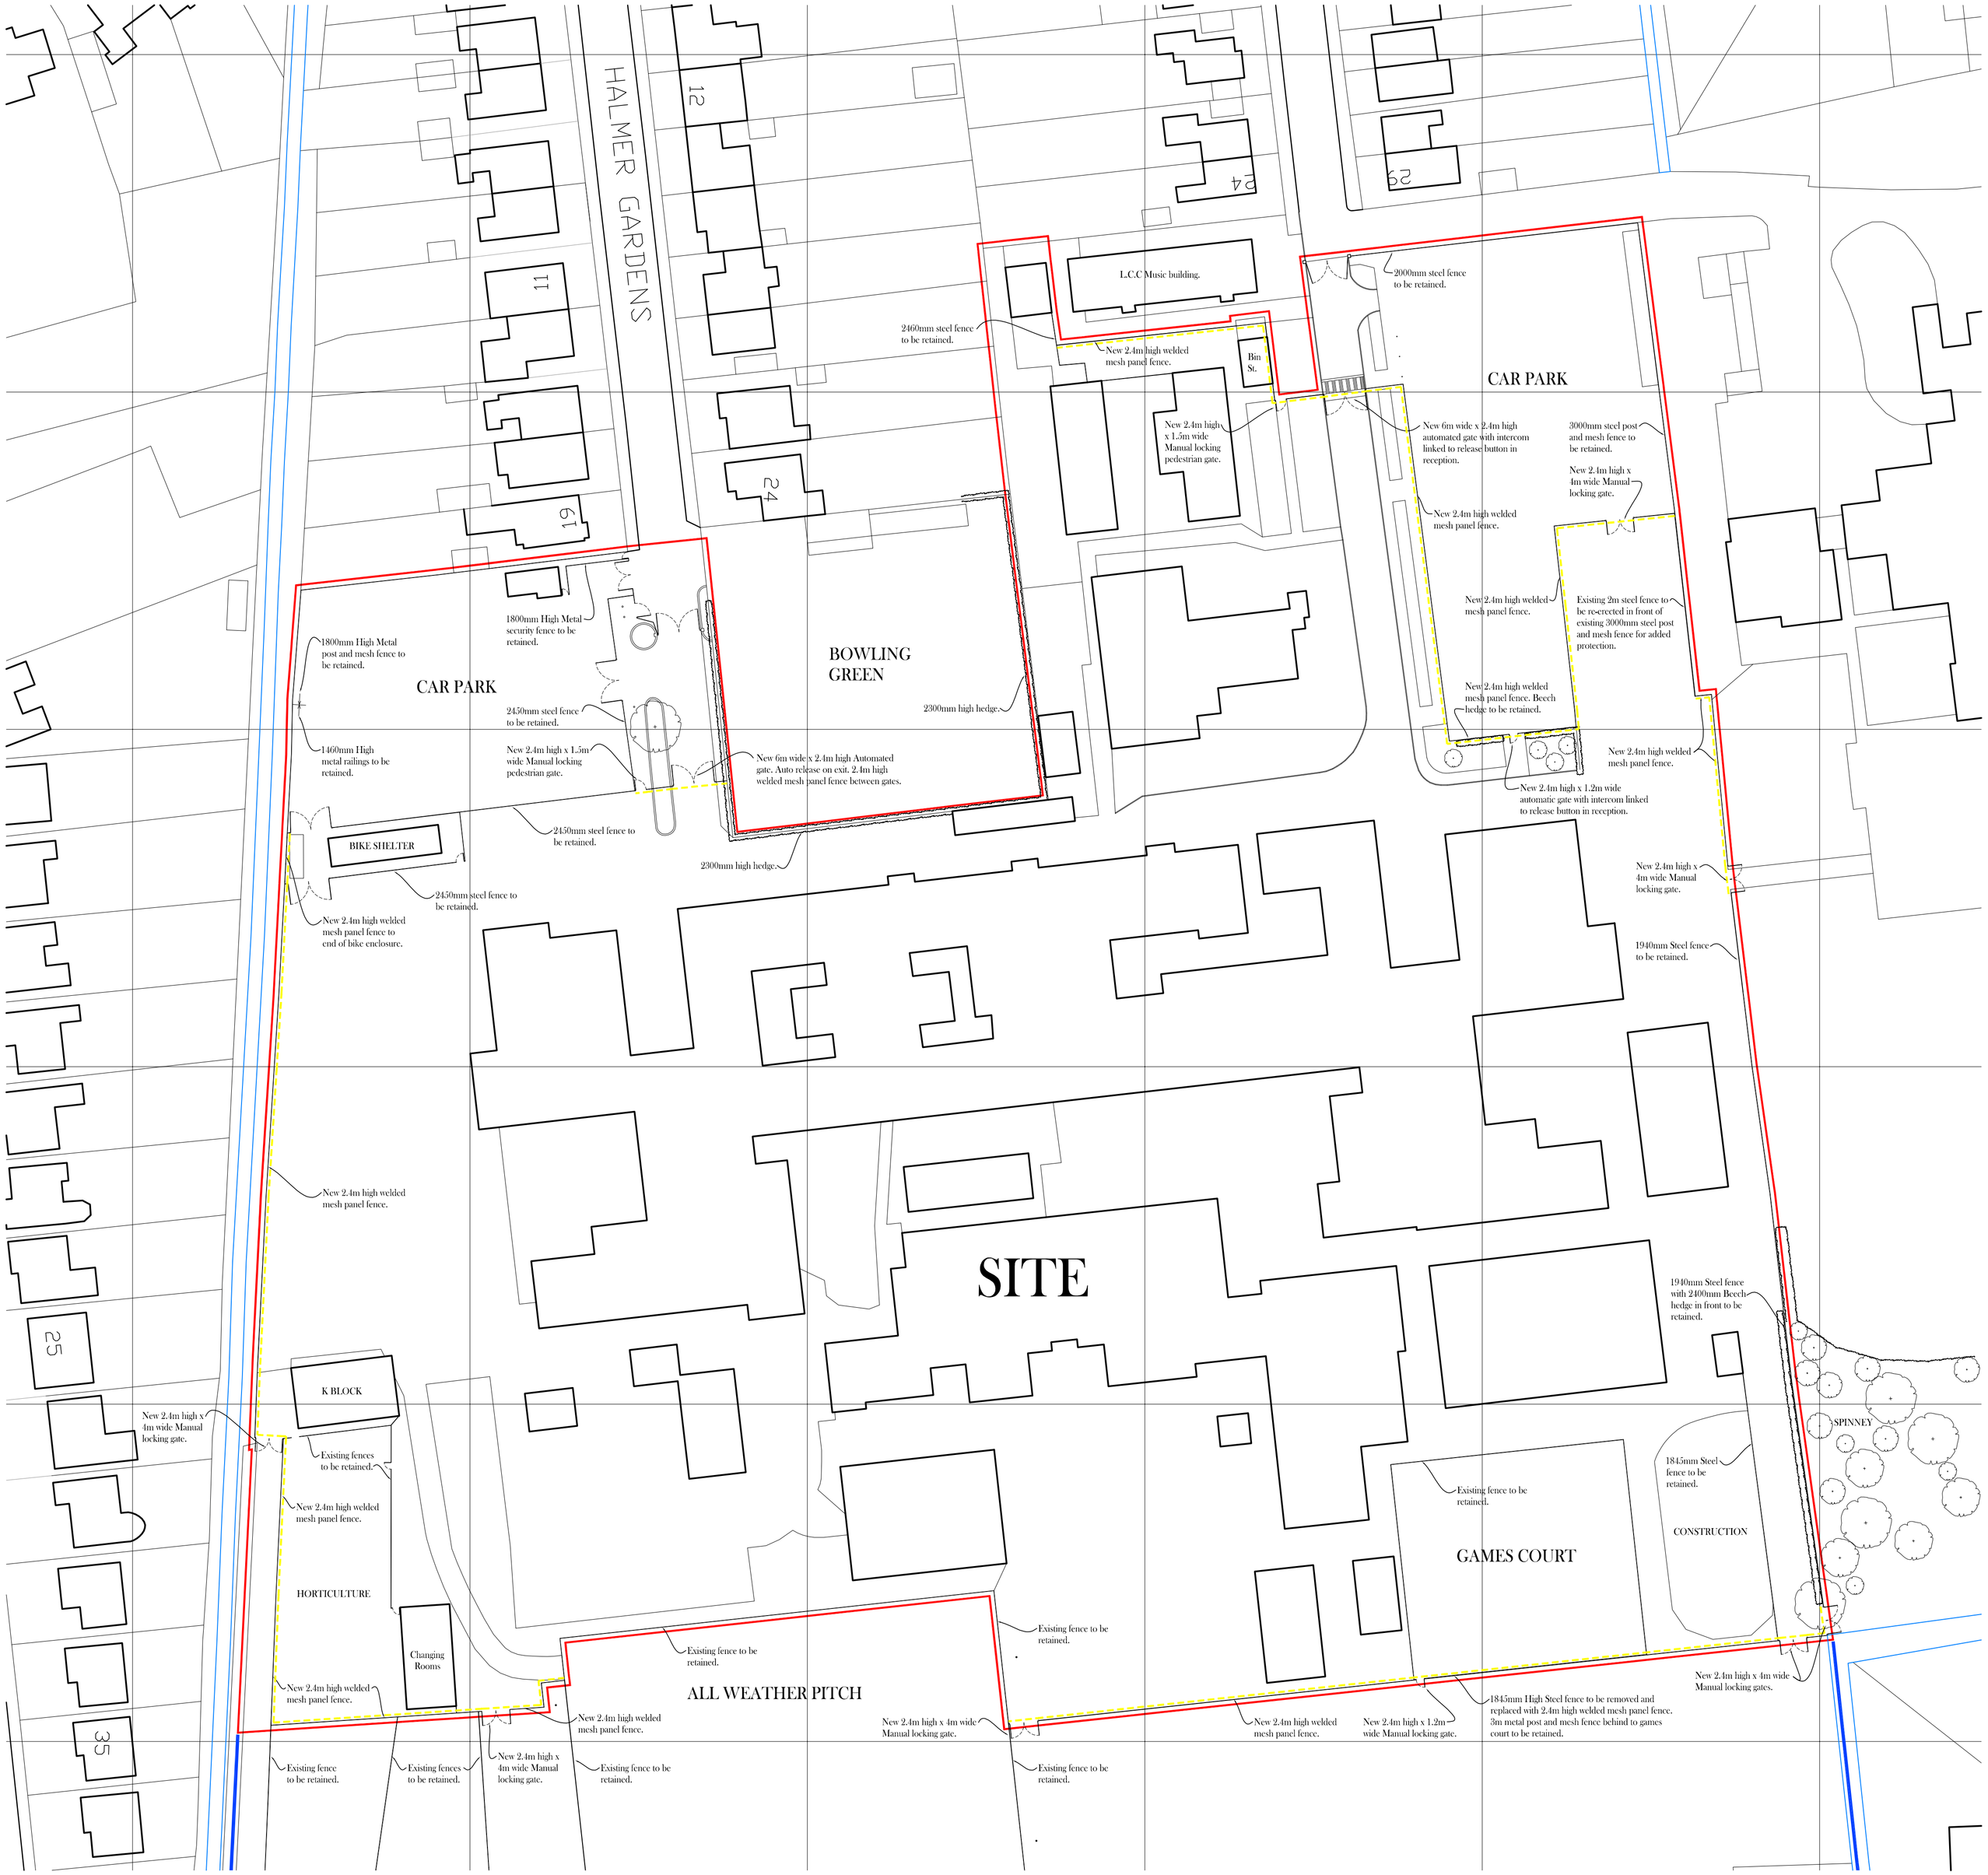


NOTES:
All dimensions to be checked on site. Do not scale from this drawing.


FENCING SPECIFICATION

Fencing to be erected will be 2.4 metre high 'Pallas' twin wire fencing system, with 60 x 40mm RHS Posts, each set into ground in concrete at 2.55m centres. All to be galvanised and powder coated green - RAL6005. Note: All new/replacement fencing is indicated by dashed yellow line for reference purposes.

Gates will match fencing and include gate posts. All manual gates will be fitted with intergral locks and look as per image below.

Automated gates will work under current card system using card readers.



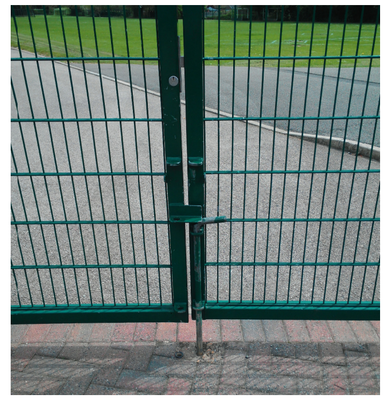

A		
	Date:	Revisions

© Copyright

Client
BOURNE ACADEMY

Job Title
PROPOSED REPLACEMENT FENCING & GATES AT THE SIR JOHN GLEED SCHOOL, SPALDING.

Drawing Title
PROPOSAL DRAWING
Please see separate PDF showing photos of 2.4m high fencing to be used throughout the project.

Scale:	Date:	Drawn:
1:500	May '16	R.W

Building Design Services
Surveying, Design, Planning & Building Regulations
12 King Edward Street, Sleaford, Lincs. NG34 7NF. TEL: 07930 733278.

Drg No.	Rev.
1019/3	