NOTES

1. REMOVE MODERN STUD WALLING
2. TAKE DOWN LOAD BEARING MASONRY WALLS. PROVIDE STEEL BEAMS BELOW CEILING LEVEL. BOX IN FOR FIRE PROTECTION WITH PLASTER FINISH. UNDERSIDE OF ALL BEAMS TO BE LEVEL
3. PROPOSED STEEL SUPPORT COLUMNS BOX IN FOR FIRE PROTECTION WITH PLASTER FINISH
4. ENCLOSE STAIRS AT FIRST FLOOR LEVEL ONLY WITH STUD WALLING WITH PLASTER FINISH.
5. FORM DISABLED RAMP UP TO RAISED FIRST FLOOR LOUNGE POSITION OF RAMP TO BE AGREED.
6. OVERLAY FORMER WORKROOM FLOOR TO BRING LEVEL WITH ADJACENT FLOOR.
7. REMOVE EXISTING STAIRS SET ASIDE FOR RE USE. INFILL HOLE FORMED BY REMOVAL OF STAIRS
8. FORM HOLE IN FLOOR & RE FIX EXISTING STAIRS
9. REMOVE CHIMNEY BREAST AT FIRST FLOOR ONLY & MAKE GOOD (FIREPLACE BRICKED UP AT PRESENT)
10. MAKE GOOD TO ALL DISTURBED WALL, FLOOR & CEILINGS

Contractor To Check All Dimensions On Site Before Work Commences.

Rev.	Date.	Init.	Revision Details.

PODDINGTONS
Architectural Design Consultants
Unit 7, The Flaxmill, Flaxmill Lane, Pinchbeck, Spalding, Lincs. PE11 3XQ.
Tel: 01775 720866. Fax: 01775 720877

Project. HILLS FURNITURE STORE
5/6 BRIDGE STREET
SPALDING

Drawing. 1st & 2nd FLOOR PLAN AS PROPOSED

Scale. 1-50

Drawing. No. 3223-6


Drawn.

Date. APRIL 2005


Rev.

DETERMINED PLAN

SHDC Planning & Development
2 9 APR 2005
Ref: 05/1485

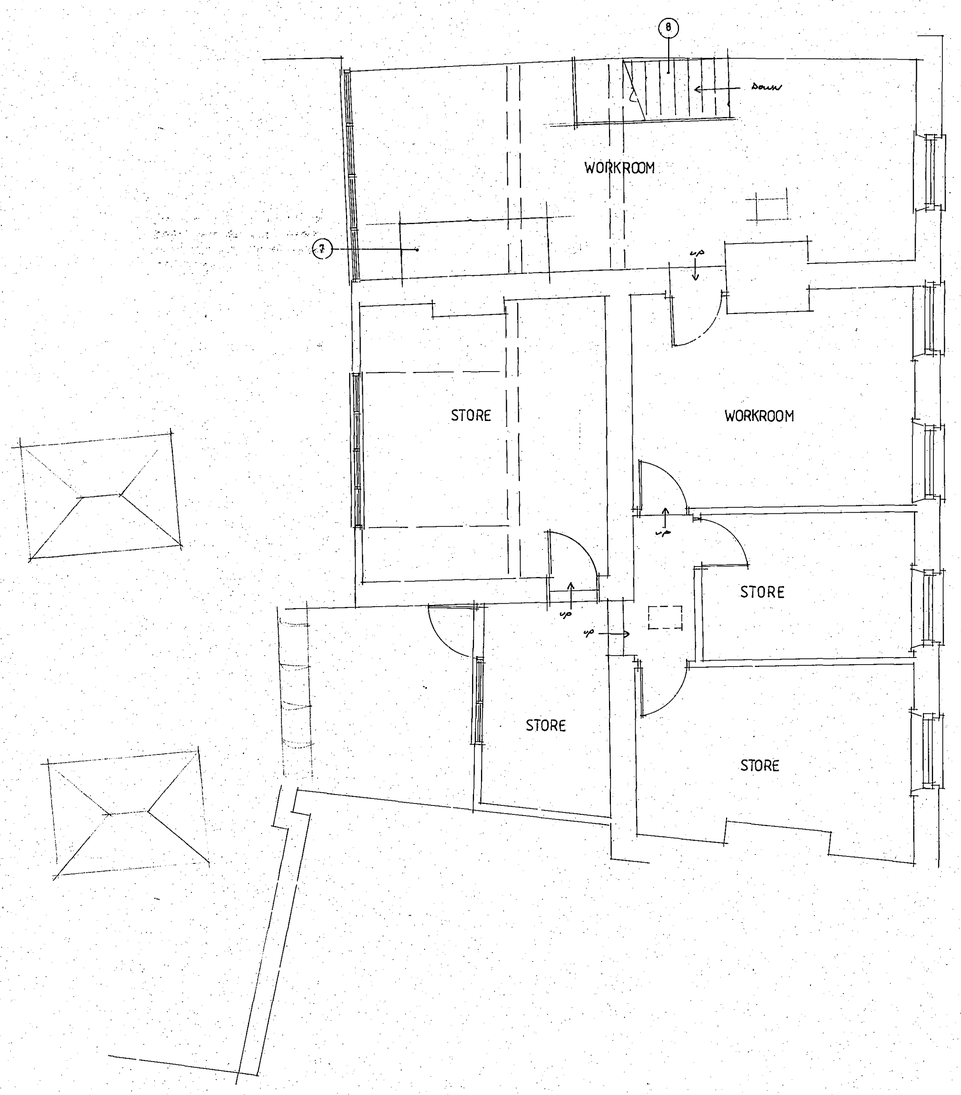

SECOND FLOOR PLAN PROPOSED

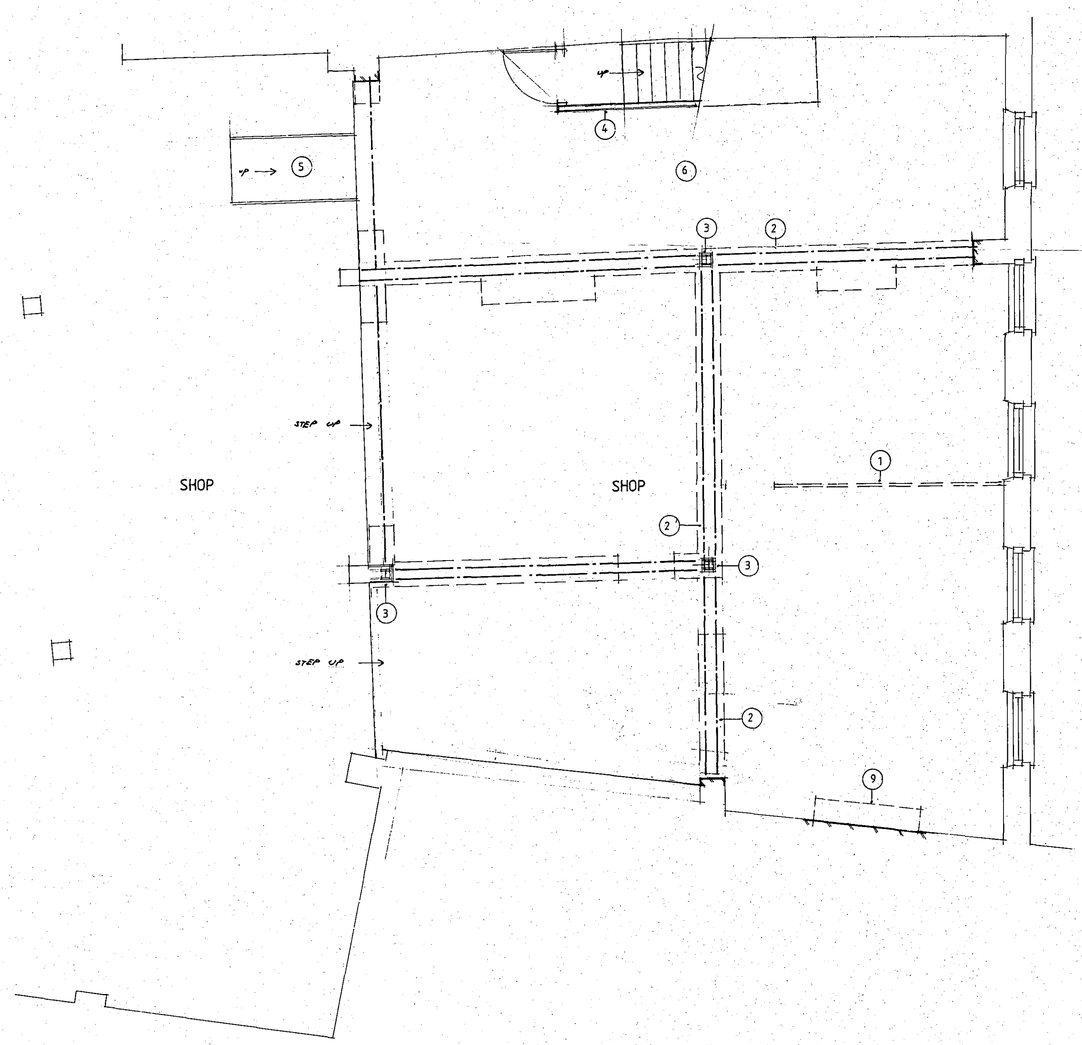

FIRST FLOOR PLAN PROPOSED

3223-6