


06/05/2015 10:16:37



Britannia Metador defender steel doorset c/w
 cloaking frame, vision panels & closer.
 Kickplates fitted internally
 Lever handles with internal thumbturn

Powdercoat finish to be Wedgewood Blue BS:
18.C.37

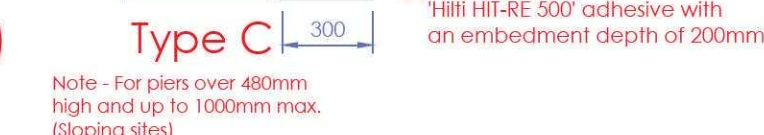

Double glazed aluminium units with full height top hung opening vents, black lockable handles, stainless steel friction hinges and trickle vents.

Glazing top be 4mm float low E inner / 16mm argon cavity / 4mm float outer.

Powdercoat finish to be Wedgewood Blue BS.
18.C.37

REV	DATE	DESCRIPTION	DR'N	CH'D
01		REVISION REVISED UNIT DIMS & DOOR	CG	AG
00		FIRST ISSUE		

CLIENT ST. PAUL'S CP SCHOOL & NURSERY

PROJECT KPO/192500

TITLE	CONSTRUCTION SHEET,ELEVATIONS, FOUNDATION LAYOUT,CROSS SECTION AND DETAILS
-------	--

STATUS DETAIL DESIGN

ORIGINATOR	EL	SCALE (ON A1) AS SHOWN
DRAWN BY	CG	CREATED ON 18.02.2015
APPROVED BY		

KP14383-CO	01
DRAWING N°	REVISION

